

Hydraulically Controlled Deluge Valve with Local Reset

Model FP 400E - 1M

The BERMAD model 400E-1M is an elastomeric, hydraulic, line pressure operated deluge valve, designed specifically for advanced fire protection systems and the latest industry standards.

The 400E-1M is activated by a pressure drop in a fusible plug wet pilot line. Once open the 400E-1M latches open until locally reset.

The optional valve position indicator can include a limit switch suitable for Fire & Gas monitoring systems.

The 400E-1M is ideal for systems with open nozzles for water or foam discharge.



(for Illustration Only)

Benefits and Features

■ Safety and reliability

- Time proven, simple design with a fail safe actuation
- Single piece, rugged elastomeric diaphragm seal - VRSD technology
- Obstacle-free, uninterrupted flow path
- No mechanical moving parts
- Latches open: remains open until reset locally
- Valve position limit switches (optional)
- Meets the requirements of industry standards

■ Quick and easy maintenance

- Designed for high reliability and easy maintenance
- In-line serviceable
- Fast and easy cover removal

Typical Applications

- Hydraulic remote controlled systems
- Automatic water spray
- Foam applications
- Corrosive water systems

Approvals



UL-Listed
Special System Water Control
Valves, Deluge Type (VLFT)
Sizes 1½" - 10"



Det Norske Veritas
Type Approval




ABS
American Bureau of Shipping
Type Approval



Lloyd's Register
Type Approval


Additional Features

- Valve position limit switches
- Alarm pressure switch
- Sea water compatibility




Operation

(for Illustration Only)

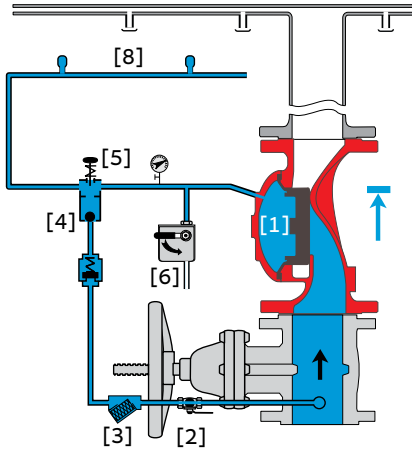

Valve Closed (normal conditions)

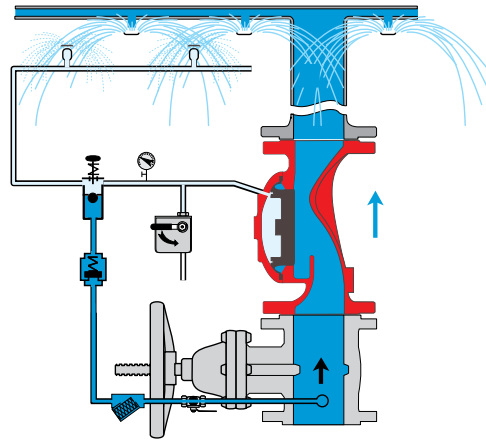


Valve Open (fire conditions)

The BERMAD model 400E-1M is held closed by water pressure in the control chamber [1]. Upon release of pressure from the control chamber, the valve opens.

Under NORMAL conditions, water pressure is supplied to the control chamber via the priming line [2] strainer [3], and is then trapped in the control chamber by the closed manual emergency release [6] and the check feature [4], of the easy-lock manual reset valve [5]. The water pressure trapped in the control chamber of the deluge valve holds the diaphragm against the valve seat, sealing it drip-tight and keeping the system pipes dry.

Under FIRE conditions, water pressure is released from the control chamber, either with the manual emergency release, or by a release of water pressure of the hydraulic fusible plug pilot line [8], this increase in flow switches the easy-lock to close releasing pressure from the valve control chamber and thereby opening the deluge valve, allowing water to flow into the system piping and to the alarm devices. Once open the 400E-1M latches open and can only be closed locally by manually depressing the easy-lock reset button.

System P&ID

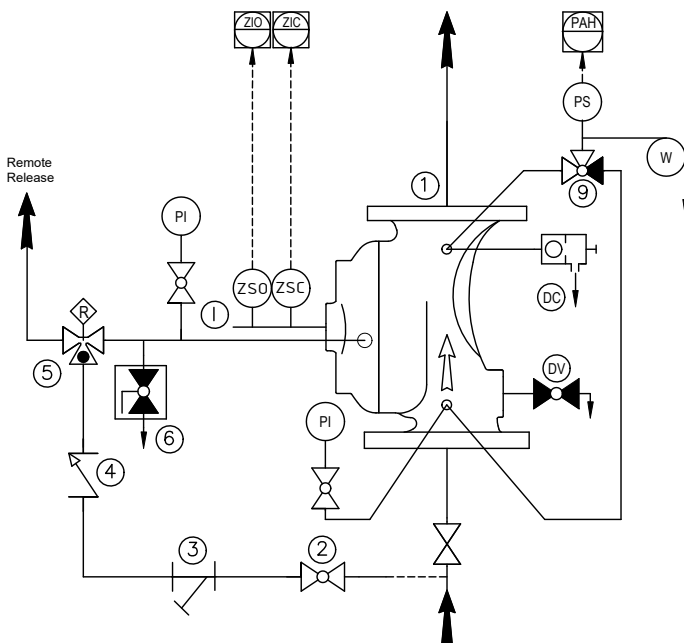


Components

- 1 BERMAD 400E Deluge Valve
- 2 Priming Ball Valve
- 3 Priming Strainer
- 4 Check valve
- 5 Easy-Lock – Manual Reset
- 6 Manual Emergency Release

Optional System Items

- ZS Limit Switch Assembly
- I Visual Indicator
- DV Drain Valve*
- PS Pressure Switch
- W Water Motor Alarm
- PI Pressure Gauge*
- 9 3 Way Alarm Test Valve*
- DC Automatic Drip Check Valve*

* Included with suffix A in valve code (drain and indicating components)
See code designations and additional Factory Fitted Options on page 4








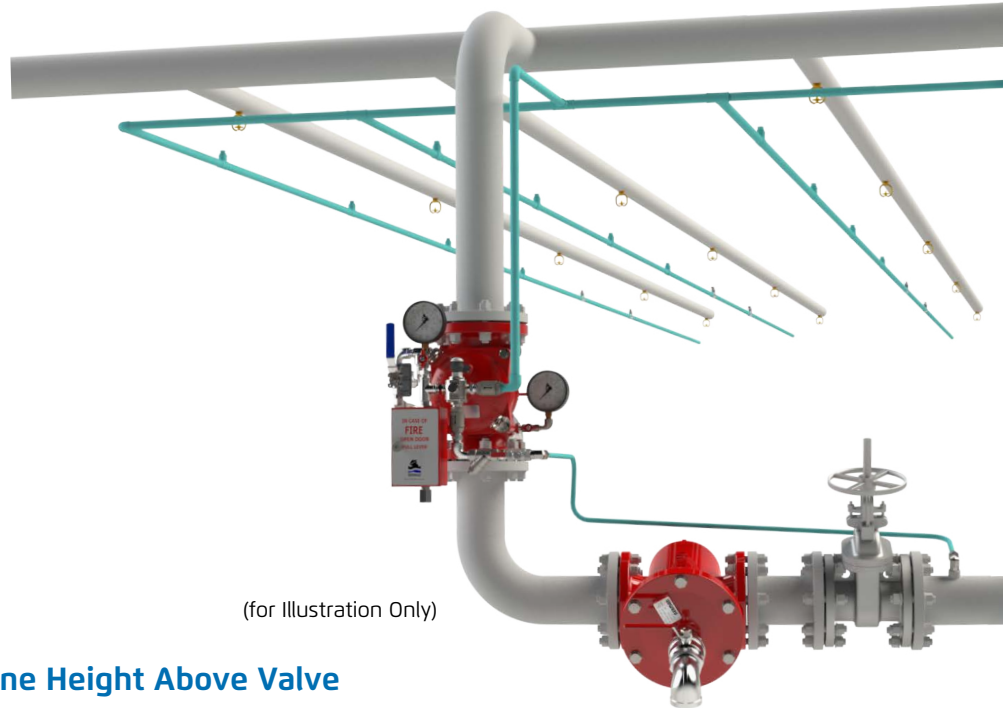
System Installation

A typical installation of the BERMAD model 400E-1M, features automatic actuation by way of a fall in pressure of a fusible plug wet pilot line. It can also be triggered manually using the local manual emergency release, or by using a remote hydraulic release.

When open and fitted with a limit switch the valve can send a feedback signal to a remote valve status monitoring system.


Optional System Items

-  Limit switch
-  Water Motor Alarm
-  Pressure Switch
-  Pressure Gauges
-  Strainer



(for Illustration Only)

Maximum Allowable Wet Pilot line Height Above Valve

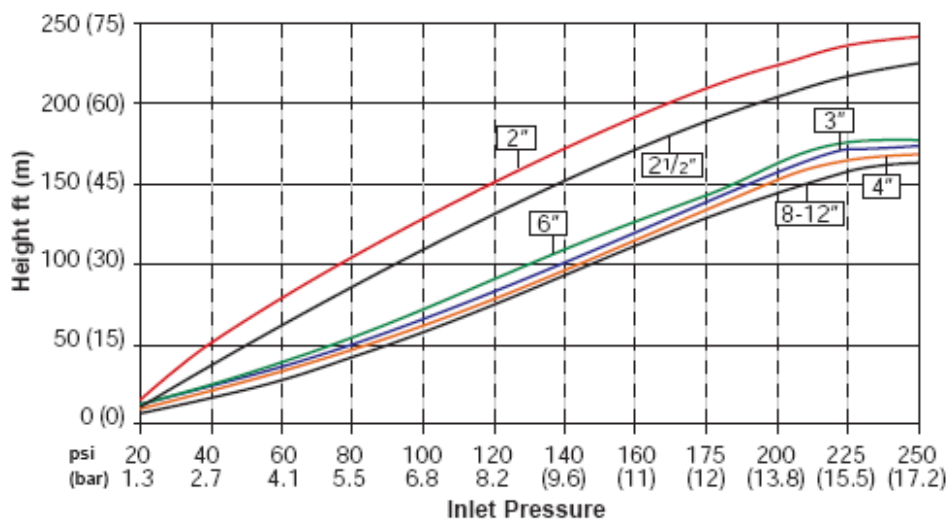

Engineering Specifications

The deluge valve shall be UL-listed.

The valve shall have an unobstructed flow path, with no stem guide or supporting ribs.

Valve actuation shall be accomplished by a single-piece, rolling diaphragm bonded with a rugged radial seal disk.


The diaphragm assembly shall be the only moving part.

The deluge valve shall include a Y-type strainer, a ball drain valve, an automatic drip-check with manual override, 4-inch pressure gauges, and a manual emergency release housed in a 316 stainless steel box.

Removing the valve cover for inspection and full maintenance shall be in line and not require removal of the valve from the piping line.

The deluge valve and its entire control trim shall be supplied pre-assembled and hydraulically tested in compliance to the UL 260 standard, by a factory certified to ISO 9000 and 9001 quality assurance standard

BERMAD Fire Protection



Model FP 400E - 1M

400E Series

Technical Data

Available Sizes (inch)



- Flanged - 1½, 2, 2½, 3, 4, 6, 8, 10 & 12"
- Grooved - 2, 3, 4, 6 & 8"

Pressure Rating

- 17.2 bar / 250 psi

Elastomer


- HTNR - Fabric Reinforced High Temperature Compound - See engineering data

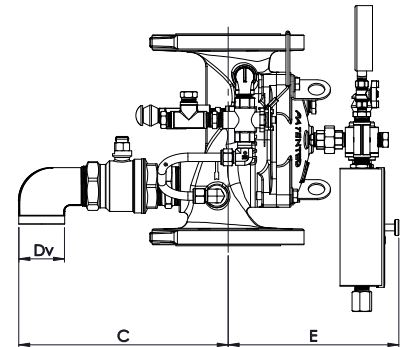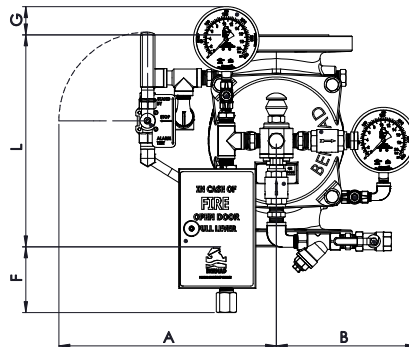

Valve Size	1½" DN40		2" DN50		2½" DN65		3" DN80		4" DN100		6" DN150		8" DN200		10" DN250		12" DN300	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
L #150	205	8.1	205	8.1	205	8.1	257	10.1	320	12.6	415	16.3	500	19.7	605	23.8	725	28.5
L Grooved	-	-	205	8.1	-	-	250	9.8	320	12.6	415	16.3	500	19.7	-	-	-	-
A	313	12.3	313	12.3	325	12.8	345	13.6	328	12.9	349	13.7	383	15.1	396	15.6	438	17.2
B	191	7.5	191	7.5	196	7.7	205	8.1	212	8.3	204	8.0	270	10.6	280	11.0	333	13.1
C	199	7.8	199	7.8	253	10.0	266	10.5	316	12.4	347	13.7	364	14.3	384	15.1	422	16.6
ØDv	¾"		¾"		1½"		1½"		2"		2"		2"		2"		2"	
E	203	8.0	203	8.0	205	8.1	238	9.4	258	10.2	334	13.1	385	15.2	382	15.0	513	20.2
F	157	6.2	157	6.2	157	6.2	131	5.2	99	3.9	52	2.0	9	0.4	-	-	-	-
G	100	3.9	100	3.9	74	2.9	43	1.7	-	-	-	-	-	-	-	-	-	-
Kg / lb	14 / 31		15 / 33		17 / 37		28 / 62		40 / 88		84 / 185		147 / 323		162 / 356		242 / 532	

IMPORTANT: Dimensions for the trim envelope or extents refer to a vertical orientation and may vary with specific component positioning; - allow a tolerance of at least ±10%.

Valve Code Designations

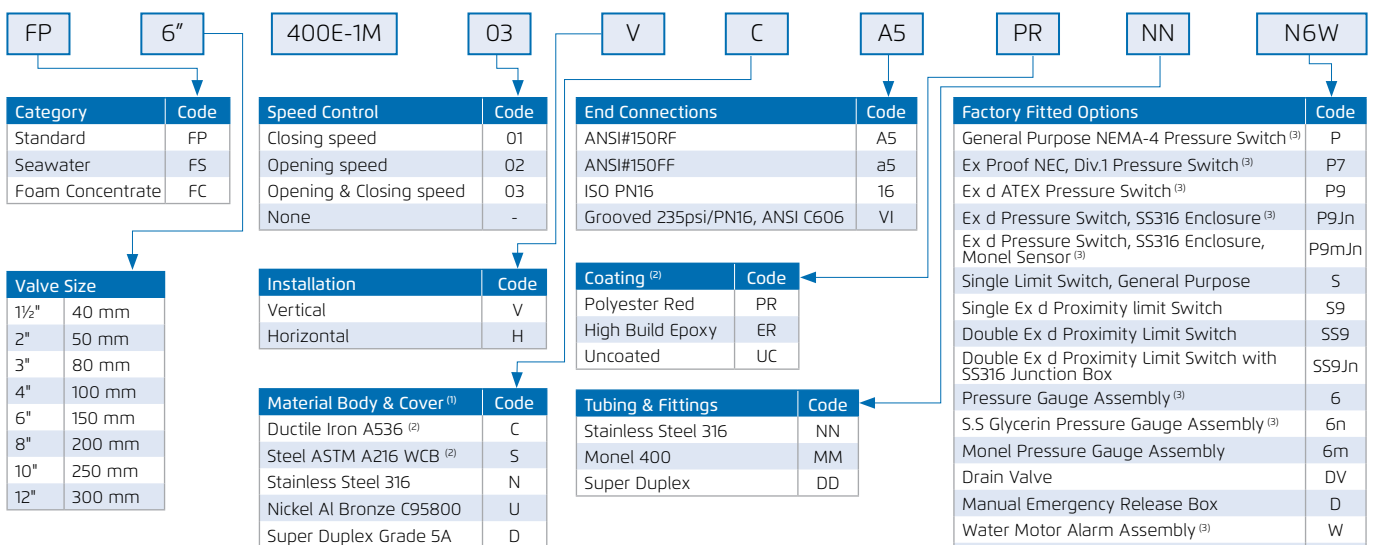

Notes:

- (1) Other materials available, see engineering data
- (2) Coated internally and externally
- (3) Supplied loose
- (4) Consult BERMAD for availability.

* More options available - contact BERMAD



www.bermad.com