HYDRAULIC ACTUATOR FOR CONTROL VALVE PILOTS

Model PCBU

Bermad PCBU is a hydraulic Pilot Calibration Bias Unit that controls various valve pilots and applications. It serves as an interface between local independent hydraulic control valves and remote control systems. Bermad PCBU responds to hydraulic command signals sent by electronic controller to allow fully automated control over the pilots' settings.

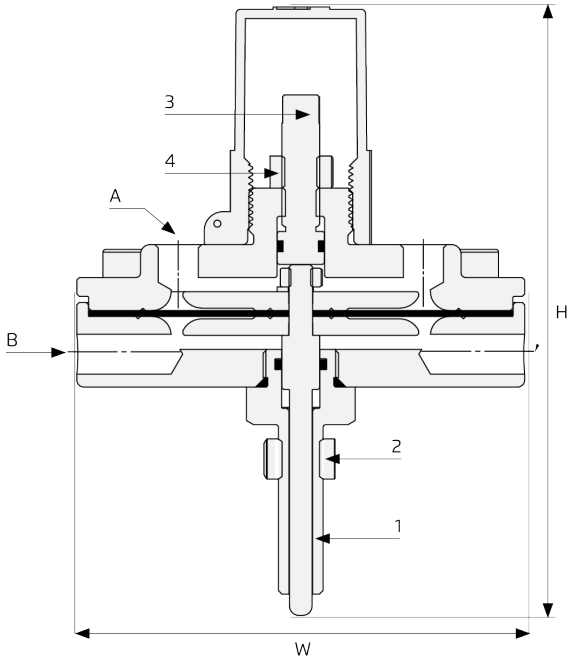

Features

- Replaces the manual adjusting screw of the pilot
- Combines independent operating systems with remote control devices
- Suitable for installation on a wide range of pilots
- Enables Low Energy control of the parameters in water systems
- Linear Multi Points or two point High and Low settings
- Mechanical prevention of out of envelop setting

Typical Applications

- Pressure Reducing
- Pressure Sustaining
- Level Control
- Flow Limiting

Technical Data

Pressure Rating: 25 bar
Water Temperature Range: 0-60 °C
Height (H): 130 mm
Width (W): 100 mm
Weight: 1.5 Kg

Standard materials:

Covers: Brass
Safety Cap: PVC
Elastomers: NBR
Internals: Stainless Steel & Brass

Pressure Calibration Range

Pilot	Spring Type		Setting Range **Spring**	Setting Range **PCBU**
	S.S 302	S.S 316	bar	bar
2PBL	K	Y	0.5-3	2.0
&	N	L	0.8-6.5	4.5
3PBL	V	T	1-10	6.5
	P	W	1-16	9.5

Part	Description
1	Guide & H.P setting (3/8" UNC)
2	H.P Locking nut (3/8" UNC)
3	L.P Adjusting screw
4	L.P Locking nut

Port	Size	Connections
A (x2)	⅛" NPT	Command / Plugged
B (x2)	⅛" NPT	Open to Atmosphere

- Comand connection to higher port; plugged lower port
- Connections refer to Normally Low operation
- Command pressure should be equal or higher than upstream pressure

The information contained herein may be changed by BERMAD without notice. BERMAD shall not be held liable for any errors.
© Copyright 2016-2026 BERMAD CS Ltd
August 2026