


PRESSURE SELECTING HYDRAULIC CONTROL (SHUTTLE VALVE)

Model 50-XM

This pressure selector shuttle valve has been designed to automatically direct the higher between two pressure sources into a control or sensing chamber, each source is applied to a different port. The higher pressure creates a superior force that moves the inner plug to seal the counter port, allowing water from the higher pressure source to flow through the common port.

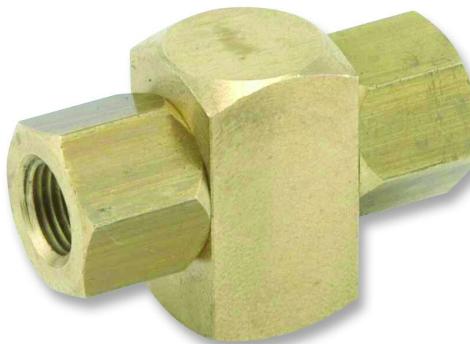

Technical Data

Pressure rating: 400 psi

Ports: $\frac{1}{8}$ " NPT Female thread

Maximum temperature: Water up to 180°F

Standard materials:

Body: Brass

Elastomers: NBR

Sealing Knob: Stainless Steel