

Medidor de Fluxo Eletromagnético Alimentado por DC


Modelo: MUT2200 + MC406

Modelo MUT2200-MC406





O medidor de vazão eletromagnético é projetado para as aplicações mais difíceis

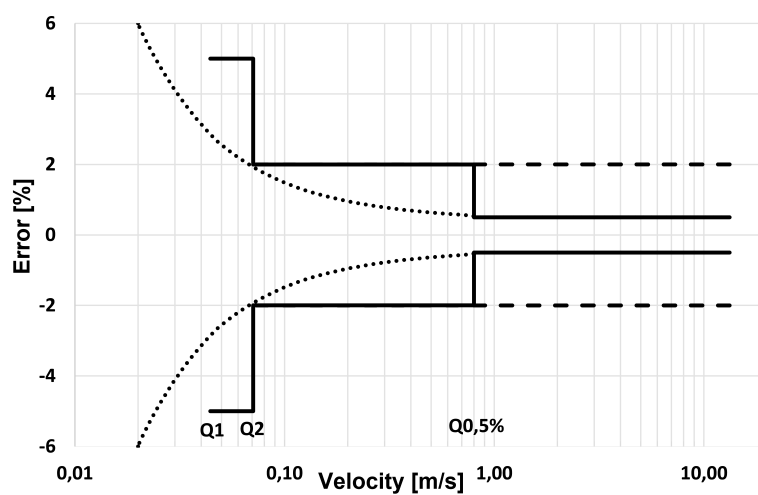

Taxa de Fluxo

Tamanho Q @ (m³/h)	DN25 1"	DN32 1¼"	DN40 1½"	DN50 2"	DN65 2½"	DN80 3"	DN100 4"	DN125 5"	DN150 6"	DN200 8"	DN250 10"	DN300 12"	DN350 14"	DN400 16"	DN450 18"
Vazão Mínimo Q1	0.08	0.08	0.128	0.2	0.32	0.504	0.8	1.280	2	3.2	5.04	8	12.8	12.8	25
Vazão de Transição Q2	0.128	0.128	0.205	0.32	0.512	0.806	1.28	2.048	3.2	5.12	8.064	12.8	20.48	20.48	40
Vazão Permanente Q3	10	10	16	25	40	63	100	160	250	400	630	1000	1600	1600	2500
Vazão Máximo Q4 (Curto Período de Tempo)	12.5	12.5	20	31.25	50	78.75	125	200	312.5	500	787.5	1250	2000	2000	3125

Tamanho Q @ (m³/h)	DN500 20"	DN600 24"	DN700 28"	DN800 32"	DN900 36"	DN1000 40"	DN1200 48"	DN1400 56"	DN1500 60"	DN1600 64"	DN1800 72"	DN2000 80"
Vazão Mínimo Q1	25	50	50	100	100	200	320	500	800	1260	2000	3200
Vazão de Transição Q2	40	80	80	160	160	320	512	800	1280	2016	3200	5120
Vazão Permanente Q3	2500	4000	4000	6300	6300	10000	16000	25000	40000	63000	100000	160000
Vazão Máximo Q4 (Curto Período de Tempo)	3125	5000	5000	7875	7875	12500	20000	31250	50000	78750	125000	200000

Recomendações de Instalação

- A seta no corpo do medidor de água deve estar na mesma direção do fluxo.
- Antes da instalação, lave a tubulação para remover detritos.
- O medidor de água deve estar cheio de água para funcionar.

