

MUT2300-Engineering

The MUT2300 sensors represent the state of the art of BERMAD production for water cycle and process applications. The innovative inner part of the sensor that increase considerably the liquid flow rate and the reading accuracy of signal generated to the electrodes, enables an extremely wide range of measurement. These performances allow to measure also low flow rates precisely and repeatable, even in difficult/problematic applications with solid parts. This flanged sensor series bases its operation on the Faraday Principle, by which a conductor crossing a magnetic field generates an electrical potential perpendicular to the field itself. On the top and on the lower side of the stainless steel AISI 304 flow tube, two coils are installed; the magnetic field generated by the electric current crossing the coils, induces in the electrodes a potential difference proportional to the flow rate. With the aim of measuring such potential of very low values, the interior of the flow tube is electrically insulated, thus the process liquid is no longer in contact neither with the material of the flow tube nor with that of the flanges. The converter used generates the current supplying the coils, acquires the electrodes potential difference, process the signal to calculate the flowrate and manages all the communications. The entire sensor has an IP68 protection degree suitable for a permanent immersion in water up to a depth of 1.5m.



The electromagnetic flowmeter designed for the toughest applications






Modbus

Sensor Specifications




Available size inches/mm	1" - 12" Inch / DN25 - 300 mm
Flanges Connections Available	EN1092-1 PN 10/16, ANSI 150, AS 2129 (table D, E, F), AS 4087, KS10K, Others on request
Pressure	21 bar - 305 psi
Temperature	Operating: -104°F/+176°F (-40°C/+80°C) Storage: -22°F/+158°F (-30...+70°C)
Accuracy	0,2% +/- 2mm/s • 0,2% +/- 0.08inch/s
Linear Material	Hard rubber (Ebonite)
Electrodes Materials	AISI316L (standard), Hastelloy C, Hastelloy B, Titanium, Tantalum, Platinum
Protection Degree	IP68 (EN 60529) permanents submersion at 1,5m (4,92ft)
Pressure Drop Class	DN≤80 ΔP10 (<0,10 bar) • DN≥100 ΔP16 (<0,16 bar)
Digital filters	Damping - cutt-off (0,05 m/s default) - bypass - peak cut
Conformity	EMC: EN 61010 - LVD: EN 61326 ; EN/IEC 60529 IP68

MUT2300 - ANSI 150






Size	L4 (mm)	D5 (mm)	Di (mm)	D6 (mm)	N	H (mm)	Lc (mm)	Dc (mm)	Lb (mm)	h (mm)	h1 (mm)
2" ; DN50	200 (+0/-3)	85	30.4	120.6	4	114.5	123	86	30	87.35	27
2½" ; DN65	200 (+0/-3)	85	34.3	139.7	4	114.5	123	86	30	87.35	27
3" ; DN80	200 (+0/-3)	103	46.3	152.4	4	123.5	123	86	30	96.35	27
4" ; DN100	250 (+0/-3)	118	62.1	190.5	8	131	123	86	30	103.85	27
5" ; DN125	250 (+0/-3)	172	74.9	215.9	8	158	123	86	30	130.85	27
6" ; DN150	300 (+0/-3)	163	100	241.3	8	153.5	123	86	30	126.35	27
8" ; DN200	350 (+0/-3)	255	154.3	298.4	8	199.5	123	86	30	172.35	27
10" ; DN250	450 (+0/-5)	312	205	361.9	12	228	123	86	30	200.85	27
12" ; DN300	500 (+0/-5)	375	259	431.8	12	259.5	123	86	30	232.35	27

MUT2300 - EN 1092 - PN 16






Size	L4 (mm)	D5 (mm)	Di (mm)	D6 (mm)	N	H (mm)	Lc (mm)	Dc (mm)	Lb (mm)	J (mm)	h (mm)
2" ; DN50	200 (+0/-3)	85	30.4	125	4	114.5	123	86	30	87.35	27
2½" ; DN65	200 (+0/-3)	85	34.3	145	8	114.5	123	86	30	87.35	27
3" ; DN80	200 (+0/-3)	103	46.3	160	8	123.5	123	86	30	96.35	27
4" ; DN100	250 (+0/-3)	118	62.1	180	8	131	123	86	30	103.85	27
5" ; DN125	250 (+0/-3)	172	74.9	210	8	158	123	86	30	130.85	27
6" ; DN150	300 (+0/-3)	163	100	240	8	153.5	123	86	30	126.35	27
8" ; DN200	350 (+0/-3)	255	154.3	295	12	199.5	123	86	30	172.35	27
10" ; DN250	450 (+0/-5)	312	205	355	12	228	123	86	30	200.85	27
12" ; DN300	500 (+0/-5)	375	259	410	12	259.5	123	86	30	232.35	27

MUT2300 - AS 2129 / Table D






Size	L4 (mm)	D5 (mm)	Di (mm)	D6 (mm)	N	H (mm)	Lc (mm)	Dc (mm)	Hb (mm)	Lb (mm)	h (mm)	h1 (mm)
2" ; DN50	200 (+0/-3)	85	30.4	114	4	114.5	123	86	72	30	87.35	27
2½" ; DN65	200 (+0/-3)	85	34.3	127	4	114.5	123	86	72	30	87.35	27
3" ; DN80	200 (+0/-3)	103	46.3	146	4	123.5	123	86	72	30	96.35	27
4" ; DN100	250 (+0/-3)	118	62.1	178	4	131	123	86	72	30	103.85	27
5" ; DN125	250 (+0/-3)	172	74.9	210	8	158	123	86	72	30	130.85	27
6" ; DN150	300 (+0/-3)	163	100	235	8	153.5	123	86	72	30	126.35	27
8" ; DN200	350 (+0/-3)	255	154.3	292	8	199.5	123	86	72	30	172.35	27
10" ; DN250	450 (+0/-5)	312	205	356	8	228	123	86	72	30	200.85	27
12" ; DN300	500 (+0/-5)	375	259	406	12	259.5	123	86	72	30	232.35	27

MUT2300 - AS 2129 / Table E






Size	L4 (mm)	D5 (mm)	Di (mm)	D6 (mm)	N	H (mm)	Lc (mm)	Dc (mm)	Hb (mm)	Lb (mm)	h (mm)	h1 (mm)
2" ; DN50	200 (+0/-3)	85	30.4	114	4	114.5	123	86	72	30	87.35	27
2½" ; DN65	200 (+0/-3)	85	34.3	127	4	114.5	123	86	72	30	87.35	27
3" ; DN80	200 (+0/-3)	103	46.3	146	8	123.5	123	86	72	30	96.35	27
4" ; DN100	250 (+0/-3)	118	62.1	178	8	131	123	86	72	30	103.85	27
5" ; DN125	250 (+0/-3)	172	74.9	210	8	158	123	86	72	30	130.85	27
6" ; DN150	300 (+0/-3)	163	100	235	8	153.5	123	86	72	30	126.35	27
8" ; DN200	350 (+0/-3)	255	154.3	292	8	199.5	123	86	72	30	172.35	27
10" ; DN250	450 (+0/-5)	312	205	356	12	228	123	86	72	30	200.85	27
12" ; DN300	500 (+0/-5)	375	259	406	12	259.5	123	86	72	30	232.35	27

MUT2300 - AS 4087 / PN 16





Size	L4 (mm)	D5 (mm)	Di (mm)	D6 (mm)	N	H (mm)	Lc (mm)	Dc (mm)	Hb (mm)	Lb (mm)	h (mm)	h1 (mm)
2" ; DN50	200 (+0/-3)	85	30.4	114	4	114.5	123	86	72	30	87.35	27
2½" ; DN65	200 (+0/-3)	85	34.3	127	4	114.5	123	86	72	30	87.35	27
3" ; DN80	200 (+0/-3)	103	46.3	146	8	123.5	123	86	72	30	96.35	27
4" ; DN100	250 (+0/-3)	118	62.1	178	4	131	123	86	72	30	103.85	27
5" ; DN125	250 (+0/-3)	172	74.9	210	8	158	123	86	72	30	130.85	27
6" ; DN150	300 (+0/-3)	163	100	235	8	153.5	123	86	72	30	126.35	27
8" ; DN200	350 (+0/-3)	255	154.3	292	8	199.5	123	86	72	30	172.35	27
10" ; DN250	450 (+0/-5)	312	205	356	8	228	123	86	72	30	200.85	27
12" ; DN300	500 (+0/-5)	375	259	406	12	259.5	123	86	72	30	232.35	27

MUT2300-MC406





Size	H (mm)	H2 (mm)	H3 (mm)
2" ; DN50	114.5	209	199
2½" ; DN65	114.5	211	201
3" ; DN80	123.5	218	208
4" ; DN100	131	226	216
5" ; DN125	158	236	226
6" ; DN150	153.5	248	238
8" ; DN200	199.5	276	266
10" ; DN250	228	308	298
12" ; DN300	259.5	336	326

MC406 Standard Separate






H (mm)	Hc (mm)	Lc1 (mm)	Lc2 (mm)	Lc3 (mm)	Dc (mm)	d (mm)	Hb (mm)	Lb (mm)	Lb1 (mm)	Lb2 (mm)	Lb3 (mm)	Lb4 (mm)	h (mm)	h1 (mm)	Weight (Kg)
296	134	130	128	137	123	112	161.5	181	125	118	73.5	70	102	141	0.6

MC406 Military connectors






H (mm)	Hc (mm)	Lc1 (mm)	Lc2 (mm)	Lc3 (mm)	Dc (mm)	d (mm)	Hb (mm)	Lb (mm)	Lb1 (mm)	Lb2 (mm)	Lb3 (mm)	Lb4 (mm)	h (mm)	h1 (mm)	Weight (Kg)
296	134	130	155	128	123	112	161.5	136	125	118	73.5	70	102	141	0.6

MC406 Separate with GSM





H (mm)	Hc (mm)	Lc (mm)	Dc (mm)	Hb (mm)	Lb (mm)	Lb1 (mm)	Lb2 (mm)	Lb3 (mm)	Lb4 (mm)	h (mm)	h1 (mm)	Weight (Kg)
332	170.5	30	112	161.5	181	125	118	73.5	70	102	141	0.9

MUT2300-MC608






Size	H (mm)	H1 (mm)	Lc5 (mm)	Dc (mm)	h1 (mm)	h2 (mm)
2" ; DN50	114.5	296	171	125	85	64
2½" ; DN65	114.5	325	171	125	85	64
3" ; DN80	123.5	356	171	125	85	64
4" ; DN100	131	211	171	125	85	64
5" ; DN125	158	211	171	125	85	64
6" ; DN150	153.5	220	171	125	85	64
8" ; DN200	199.5	228	171	125	85	64
10" ; DN250	228	255	171	125	85	64
12" ; DN300	259.5	250	171	125	85	64

MC608A






H (mm)	H1 (mm)	Lc (mm)	Lc1 (mm)	Lc2 (mm)	Lc3 (mm)	Lc4 (mm)	Dc (mm)	Lb (mm)	Lb1 (mm)	Lb2 (mm)	Lb3 (mm)	Lb4 (mm)	Lb5 (mm)	h (mm)
307	296	173	105.5	67.5	173	111	125	181	125	118	74	54	70	102

MC608B/R






H (mm)	H1 (mm)	Lc (mm)	Lc1 (mm)	Lc2 (mm)	Lc3 (mm)	Lc4 (mm)	Dc (mm)	Lb (mm)	Lb1 (mm)	Lb2 (mm)	Lb3 (mm)	Lb4 (mm)	Lb5 (mm)	h (mm)
307	296	247	105.5	141.5	173	111	125	181	125	118	74	54	150	102

MC608I



Hc (mm)	Lc (mm)	Lc1 (mm)
300	200	200


MC608P



H1 (mm)	H2 (mm)	Hc (mm)	Lc (mm)	Lc1 (mm)	Lc2 (mm)	Lc3 (mm)	Lc4 (mm)	Lc5 (mm)
127.5	120	135.5	180	146	130	10.5	119.5	130

Measuring Accuracy

Each flowmeter is standard wet calibrated under reference conditions by direct volume comparison. The performance of the flowmeter is defined and documented in an individual calibration certificate. Accuracy 0,2% +/- 2mm/s (0,2% +/- 1mm/s on request)

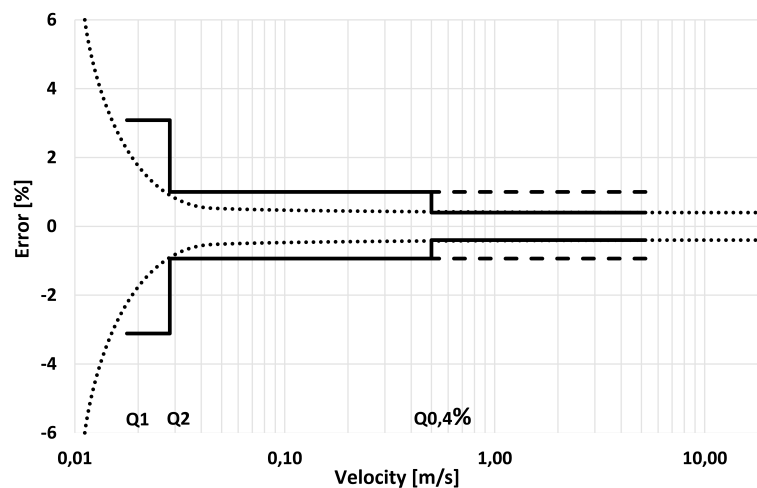


Flow Rate

Size Q @ (m³/h)	DN50 2"	DN65 2½"	DN80 3"	DN100 4"	DN125 5"	DN150 6"	DN200 8"	DN250 10"	DN300 12"
Q1 Minimum Flow	0.125	0.2	0.315	0.5	0.8	1.25	3.15	5	8
Q2 Transitional Flow	0.2	0.32	0.5	0.8	1.28	2	5.04	8	12.5
Q3 Permanent Flow	25	40	63	100	160	250	630	1000	1000
Q4 Maximum Flow (Short Time)	31.25	50	78.75	125	200	312.5	787.5	1250	1250

Installation Recommendations

- The water meter can be installed in any orientation without interfering with metrological performance.
- The arrow on water meter body must be in the same direction with the flow.
- Prior to installation, flush the line to remove debris.
- The water meter must be filled with water to operate.

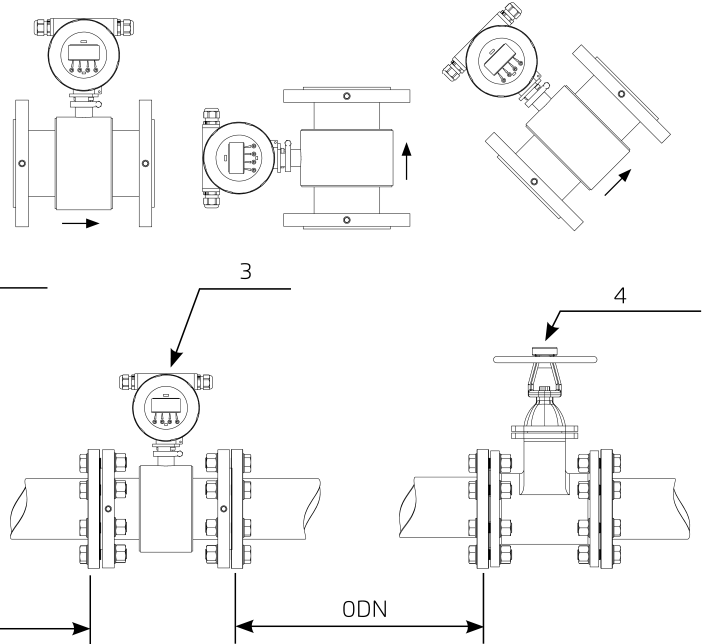

[1] Isolation Valve

[2] Air Valve

[ODN] Unrestricted pipe,
minimum 0XDN

[3] MUT2300

[4] Isolation Valve