

Modelo FP-400E-2DC



Características y ventajas

- Seguridad y confiabilidad
 - Diseño simple, probado en el tiempo, con activación a prueba de fallos
 - Sello de diafragma elastomérico de una sola pieza, robusto - tecnología VRSD
 - Ruta de flujo sin obstáculos y sin interrupciones
 - Cumple con los requisitos de los estándares de la industria
 - Diseñada para alta fiabilidad y fácil mantenimiento
- Mantenimiento rápido y fácil
 - Servicio en línea
 - Retiro rápido y fácil de la tapa

Aplicaciones típicas

- Control de presión local
- Suministro de agua a alta presión
- Sistemas de Rociadores de Agua de Control Remoto

Aprobaciones



Listada UL
Válvulas especiales de control de agua para sistemas, tipo diluvio (VLFT)
Tamaños 1½" - 10"



ABS
American Bureau of Shipping
Aprobación
Tamaños 1½" - 12"



Det Norske Veritas
Aprobación
Tamaños de 1½" a 12"





Lloyd's Register
Aprobación
Tamaños 1½" - 10"


Características adicionales

- Interruptores de límite de posición de válvula
- Interruptor de presión de alarma
- Compatibilidad con agua de mar
- Opción de solenoide Magna-Latch
- Revestimiento epoxi de alto espesor a base de zinc resistente a la corrosión

Operación

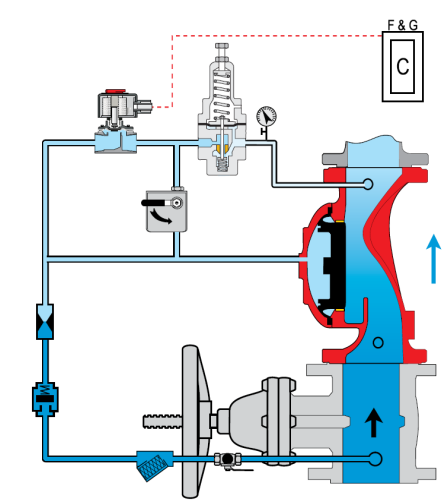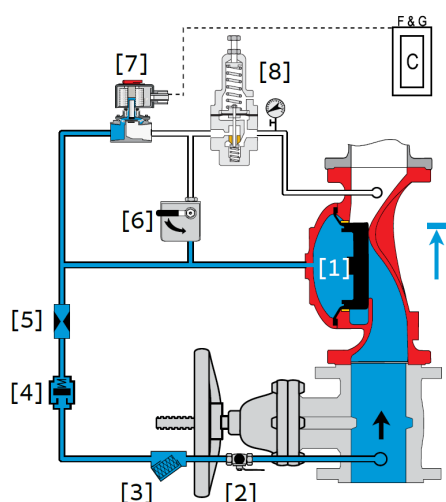

Esquema del sistema

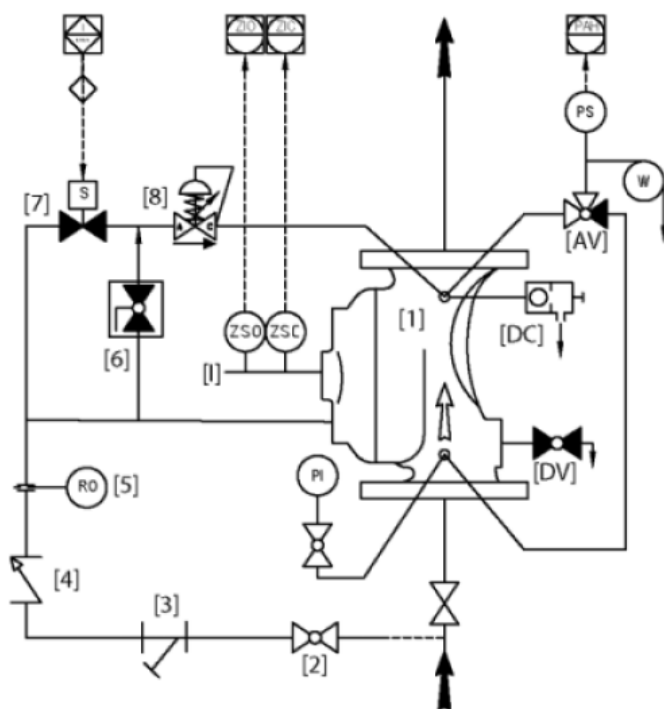

Componentes	
1	BERMAD 400E Deluge Valve
2	Priming ball valve
3	Priming strainer
4	Válvula de retención (cheque), tipo Lift
5	Restriction Orifice
6	Manual Emergency Release
7	2-Way Solenoid Valve
8	Pressure Reducing Pilot Valve

Elementos opcionales del sistema	
ZS	Conjunto del interruptor de límite *
W	Kit de alarma para motor hidráulico, aluminio recubierto de epoxi
PS	Presostato PS-10 o PS-40
I	
PI	
DV	
DC	Automatic drip check valve
AV	

* Incluido con el sufijo A en el código de la válvula (componentes de drenaje e indicación)

Consulte las designaciones de código y "elementos adicionales suministrados de fábrica" en la página 4

"

Instalación del sistema

Elementos opcionales del sistema



Water Motor Alarm



Single Ex d
Proximity S.S.316
Limit Switch




Pressure Switch



Pressure Gauge



Basket Strainer -
60F

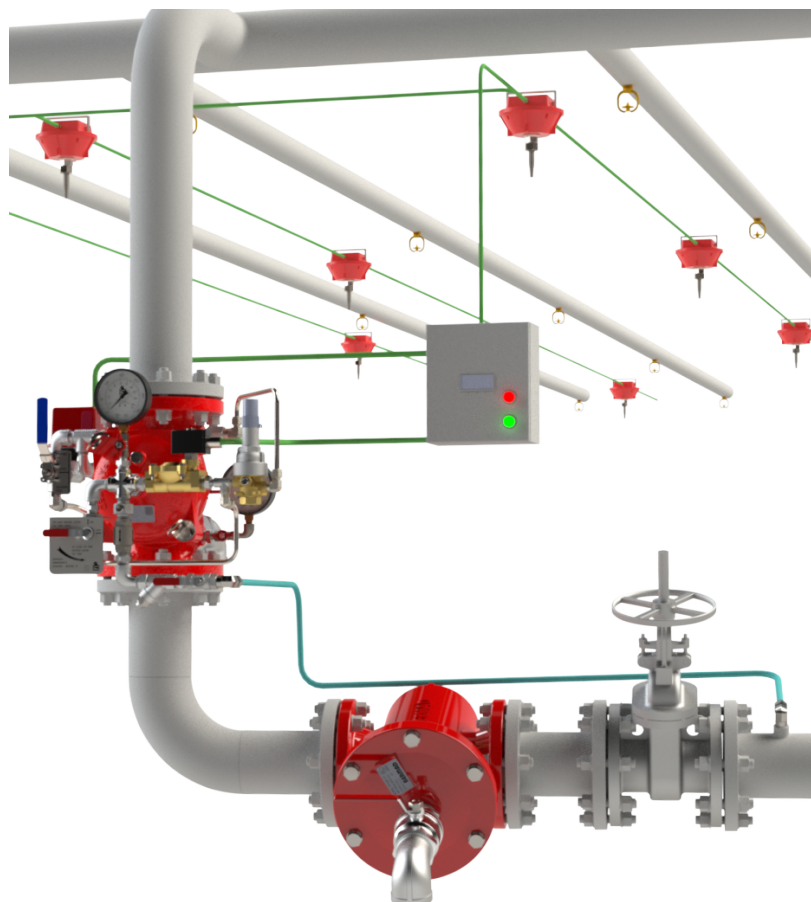

Especificaciones sugeridas

FP-400E-2DC

Datos técnicos

Tamaños disponibles:

Embridada- 1½, 2, 2½, 3, 4, 6, 8, 10 & 12"

Ranura (Victaulic)- 2, 3, 4, 6, & 8"

Presión nominal:


ANSI #150 - 17.2 bar | 250 psi

Ranura (Victaulic) - 17.2 bar | 250 psi

Elastómero:

HTNR - Fabric Reinforced High Temperature

Compound - See engineering data

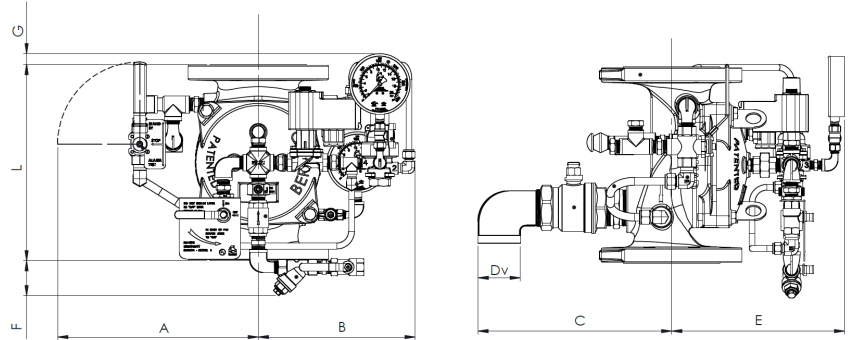

Tamaño de Válvula	L #150 mm in	L ranurado mm in	A mm in	B mm in	C mm in	ØD in	E mm in	F mm in	G mm in	Peso #150 kg lb
DN40 1½"	205 8.1	-	313 12.3	256 10	199 7.8	¾"	227 8.9	115 4.5	50 2	18 40
DN50 2"	205 8.1	205 8.1	313 12.3	256 10	199 7.8	¾"	227 8.9	115 4.5	50 2	19 42
DN65 2½"	205 8.1	-	325 12.8	256 10	253 10	1½"	229 9	115 4.5	50 2	22 49
DN80 3"	257 10.1	250 9.8	345 13.6	256 10	266 10.5	1½"	263 10.4	89 3.5	49 2	30 66
DN100 4"	320 12.6	320 12.6	329 13	219 8.6	316 12.4	1½"	270 10.6	128 5	45 1.8	34 75
DN150 6"	415 16.3	415 16.3	349 13.7	256 10	347 13.7	2"	359 14.1	10 0.4	-	88 194
DN200 8"	500 19.7	500 19.7	383 15.1	256 10	364 14.3	2"	409 16.1	-	-	150 331
DN250 10"	605 23.8	-	396 15.6	256 10	384 15.1	2"	407 16	-	-	167 368
DN300 12"	725 28.5	-	438 17.2	297 10.1	422 16.6	2"	504 19.8	-	-	255 562

IMPORTANTE: Las dimensiones del contorno del trim o sus extensiones se refieren a una orientación vertical y pueden variar según la posición específica de los componentes. Aparte de la dimensión "L", permita una tolerancia de al menos ±15%.

Valve Code Designations

FP	6"	400E-2DC	03	V	C	A5	ER	4DC	NN	N6nW																																																																																																																																														
<table><tr><th>Category</th><th>Code</th></tr><tr><td>Standard</td><td>FP</td></tr><tr><td>Seawater</td><td>FS</td></tr><tr><td>Foam</td><td>FC</td></tr></table>	Category	Code	Standard	FP	Seawater	FS	Foam	FC	<table><tr><th>Valve Size</th><th></th></tr><tr><td>1½"</td><td>40 mm</td></tr><tr><td>2"</td><td>50 mm</td></tr><tr><td>2½"</td><td>60 mm</td></tr><tr><td>3"</td><td>80 mm</td></tr><tr><td>4"</td><td>100 mm</td></tr><tr><td>6"</td><td>150 mm</td></tr><tr><td>8"</td><td>200 mm</td></tr><tr><td>10"</td><td>250 mm</td></tr><tr><td>12"</td><td>300 mm</td></tr></table>	Valve Size		1½"	40 mm	2"	50 mm	2½"	60 mm	3"	80 mm	4"	100 mm	6"	150 mm	8"	200 mm	10"	250 mm	12"	300 mm	<table><tr><th>Installation</th><th>Code</th></tr><tr><td>Vertical</td><td>V</td></tr><tr><td>Horizontal</td><td>H</td></tr></table>	Installation	Code	Vertical	V	Horizontal	H	<table><tr><th>Material Body & Cover ⁽¹⁾</th><th>Code</th></tr><tr><td>Ductile Iron A356 ⁽²⁾</td><td>C</td></tr><tr><td>Steel ASTM A216 WCB ⁽²⁾</td><td>S</td></tr><tr><td>Stainless Steel 316</td><td>N</td></tr><tr><td>Nickel Al Bronze C95800</td><td>U</td></tr><tr><td>Super Duplex Grade 5A</td><td>D</td></tr></table>	Material Body & Cover ⁽¹⁾	Code	Ductile Iron A356 ⁽²⁾	C	Steel ASTM A216 WCB ⁽²⁾	S	Stainless Steel 316	N	Nickel Al Bronze C95800	U	Super Duplex Grade 5A	D	<table><tr><th>End Connections</th><th>Code</th></tr><tr><td>ANSI#150RF</td><td>A5</td></tr><tr><td>ANSI#150FF</td><td>a5</td></tr><tr><td>ISO PN16</td><td>16</td></tr><tr><td>Grooved ANSI</td><td>VI</td></tr></table>	End Connections	Code	ANSI#150RF	A5	ANSI#150FF	a5	ISO PN16	16	Grooved ANSI	VI	<table><tr><th>Coating</th><th>Code</th></tr><tr><td>High Build Epoxy</td><td>ER</td></tr><tr><td>Zinc Based High Build Epoxy ⁽⁵⁾</td><td>ZR</td></tr><tr><td>Uncoated</td><td>UC</td></tr></table>	Coating	Code	High Build Epoxy	ER	Zinc Based High Build Epoxy ⁽⁵⁾	ZR	Uncoated	UC	<table><tr><th>Voltage - Main Valve N.O or N.C *</th><th>Code</th></tr><tr><td>24VDC - N.C.</td><td>4DC</td></tr><tr><td>24VDC - N.O.</td><td>4DO</td></tr><tr><td>24VDC - Latch</td><td>4DS</td></tr><tr><td>110VDC - N.C.</td><td>5DC</td></tr><tr><td>110VDC - N.O.</td><td>5DO</td></tr><tr><td>110 - 120/AC - N.C.</td><td>5AC</td></tr><tr><td>110 - 120/AC - N.C.</td><td>5AO</td></tr><tr><td>220 - 240/AC - N.C.</td><td>2AC</td></tr><tr><td>221 - 240/AC - N.C.</td><td>2AO</td></tr></table>	Voltage - Main Valve N.O or N.C *	Code	24VDC - N.C.	4DC	24VDC - N.O.	4DO	24VDC - Latch	4DS	110VDC - N.C.	5DC	110VDC - N.O.	5DO	110 - 120/AC - N.C.	5AC	110 - 120/AC - N.C.	5AO	220 - 240/AC - N.C.	2AC	221 - 240/AC - N.C.	2AO	<table><tr><th>Factory Supplied Additional Items</th><th>Code</th></tr><tr><td>General Purpose NEMA-4 Pressure Switch</td><td>P</td></tr><tr><td>Ex Proof NEC, Div.1 Pressure Switch ⁽³⁾</td><td>P7</td></tr><tr><td>Ex d ATEX Pressure Switch ⁽³⁾</td><td>P9</td></tr><tr><td>Ex d Pressure Switch, SS316 Enclosure ⁽³⁾</td><td>P9Jn</td></tr><tr><td>Ex d Pressure Switch, SS316 Enclosure, Monel Sensor ⁽³⁾</td><td>P9mJn</td></tr><tr><td>Single Limit Switch, General Purpose</td><td>S</td></tr><tr><td>Single Ex d Proximity limit Switch</td><td>S9</td></tr><tr><td>Double Ex d Proximity Limit Switch</td><td>SS9</td></tr><tr><td>Double Ex d Proximity Limit Switch with SS316 Junction Box</td><td>SS9Jn</td></tr><tr><td>Pressure Gauge Assembly ⁽³⁾</td><td>6</td></tr><tr><td>S.S Glycerin Pressure Gauge Assembly ⁽³⁾</td><td>6n</td></tr><tr><td>Monel Pressure Gauge Assembly ⁽³⁾</td><td>6m</td></tr><tr><td>Ex Proof NEC Class 1 Div 1 Solenoid</td><td>7</td></tr><tr><td>Ex. d Atex Solenoid</td><td>9</td></tr><tr><td>Magna-Latch Solenoid - 2 wires</td><td>H2</td></tr><tr><td>Stainless steel 316 Solenoid Valve</td><td>K</td></tr><tr><td>Drain Valve</td><td>DV</td></tr><tr><td>Water Motor Alarm Assembly ⁽³⁾</td><td>W</td></tr><tr><td>Special Elastomer</td><td>E</td></tr><tr><td>Large Control Filter</td><td>F</td></tr><tr><td>Valve Position Indicator</td><td>I</td></tr><tr><td>S.S 316 Trim Accessories</td><td>N</td></tr><tr><td>S.S Solenoid Valve</td><td>K</td></tr><tr><td>Pressure Transmitter ⁽³⁾</td><td>Q</td></tr><tr><td>Drain and Indicating Components</td><td>A</td></tr></table>	Factory Supplied Additional Items	Code	General Purpose NEMA-4 Pressure Switch	P	Ex Proof NEC, Div.1 Pressure Switch ⁽³⁾	P7	Ex d ATEX Pressure Switch ⁽³⁾	P9	Ex d Pressure Switch, SS316 Enclosure ⁽³⁾	P9Jn	Ex d Pressure Switch, SS316 Enclosure, Monel Sensor ⁽³⁾	P9mJn	Single Limit Switch, General Purpose	S	Single Ex d Proximity limit Switch	S9	Double Ex d Proximity Limit Switch	SS9	Double Ex d Proximity Limit Switch with SS316 Junction Box	SS9Jn	Pressure Gauge Assembly ⁽³⁾	6	S.S Glycerin Pressure Gauge Assembly ⁽³⁾	6n	Monel Pressure Gauge Assembly ⁽³⁾	6m	Ex Proof NEC Class 1 Div 1 Solenoid	7	Ex. d Atex Solenoid	9	Magna-Latch Solenoid - 2 wires	H2	Stainless steel 316 Solenoid Valve	K	Drain Valve	DV	Water Motor Alarm Assembly ⁽³⁾	W	Special Elastomer	E	Large Control Filter	F	Valve Position Indicator	I	S.S 316 Trim Accessories	N	S.S Solenoid Valve	K	Pressure Transmitter ⁽³⁾	Q	Drain and Indicating Components	A	<table><tr><th>Tubing & Fittings</th><th>Code</th></tr><tr><td>Stainless Steel 316</td><td>NN</td></tr><tr><td>Monel 400</td><td>MM</td></tr><tr><td>Super Duplex</td><td>DD</td></tr></table>	Tubing & Fittings	Code	Stainless Steel 316	NN	Monel 400	MM	Super Duplex	DD
Category	Code																																																																																																																																																							
Standard	FP																																																																																																																																																							
Seawater	FS																																																																																																																																																							
Foam	FC																																																																																																																																																							
Valve Size																																																																																																																																																								
1½"	40 mm																																																																																																																																																							
2"	50 mm																																																																																																																																																							
2½"	60 mm																																																																																																																																																							
3"	80 mm																																																																																																																																																							
4"	100 mm																																																																																																																																																							
6"	150 mm																																																																																																																																																							
8"	200 mm																																																																																																																																																							
10"	250 mm																																																																																																																																																							
12"	300 mm																																																																																																																																																							
Installation	Code																																																																																																																																																							
Vertical	V																																																																																																																																																							
Horizontal	H																																																																																																																																																							
Material Body & Cover ⁽¹⁾	Code																																																																																																																																																							
Ductile Iron A356 ⁽²⁾	C																																																																																																																																																							
Steel ASTM A216 WCB ⁽²⁾	S																																																																																																																																																							
Stainless Steel 316	N																																																																																																																																																							
Nickel Al Bronze C95800	U																																																																																																																																																							
Super Duplex Grade 5A	D																																																																																																																																																							
End Connections	Code																																																																																																																																																							
ANSI#150RF	A5																																																																																																																																																							
ANSI#150FF	a5																																																																																																																																																							
ISO PN16	16																																																																																																																																																							
Grooved ANSI	VI																																																																																																																																																							
Coating	Code																																																																																																																																																							
High Build Epoxy	ER																																																																																																																																																							
Zinc Based High Build Epoxy ⁽⁵⁾	ZR																																																																																																																																																							
Uncoated	UC																																																																																																																																																							
Voltage - Main Valve N.O or N.C *	Code																																																																																																																																																							
24VDC - N.C.	4DC																																																																																																																																																							
24VDC - N.O.	4DO																																																																																																																																																							
24VDC - Latch	4DS																																																																																																																																																							
110VDC - N.C.	5DC																																																																																																																																																							
110VDC - N.O.	5DO																																																																																																																																																							
110 - 120/AC - N.C.	5AC																																																																																																																																																							
110 - 120/AC - N.C.	5AO																																																																																																																																																							
220 - 240/AC - N.C.	2AC																																																																																																																																																							
221 - 240/AC - N.C.	2AO																																																																																																																																																							
Factory Supplied Additional Items	Code																																																																																																																																																							
General Purpose NEMA-4 Pressure Switch	P																																																																																																																																																							
Ex Proof NEC, Div.1 Pressure Switch ⁽³⁾	P7																																																																																																																																																							
Ex d ATEX Pressure Switch ⁽³⁾	P9																																																																																																																																																							
Ex d Pressure Switch, SS316 Enclosure ⁽³⁾	P9Jn																																																																																																																																																							
Ex d Pressure Switch, SS316 Enclosure, Monel Sensor ⁽³⁾	P9mJn																																																																																																																																																							
Single Limit Switch, General Purpose	S																																																																																																																																																							
Single Ex d Proximity limit Switch	S9																																																																																																																																																							
Double Ex d Proximity Limit Switch	SS9																																																																																																																																																							
Double Ex d Proximity Limit Switch with SS316 Junction Box	SS9Jn																																																																																																																																																							
Pressure Gauge Assembly ⁽³⁾	6																																																																																																																																																							
S.S Glycerin Pressure Gauge Assembly ⁽³⁾	6n																																																																																																																																																							
Monel Pressure Gauge Assembly ⁽³⁾	6m																																																																																																																																																							
Ex Proof NEC Class 1 Div 1 Solenoid	7																																																																																																																																																							
Ex. d Atex Solenoid	9																																																																																																																																																							
Magna-Latch Solenoid - 2 wires	H2																																																																																																																																																							
Stainless steel 316 Solenoid Valve	K																																																																																																																																																							
Drain Valve	DV																																																																																																																																																							
Water Motor Alarm Assembly ⁽³⁾	W																																																																																																																																																							
Special Elastomer	E																																																																																																																																																							
Large Control Filter	F																																																																																																																																																							
Valve Position Indicator	I																																																																																																																																																							
S.S 316 Trim Accessories	N																																																																																																																																																							
S.S Solenoid Valve	K																																																																																																																																																							
Pressure Transmitter ⁽³⁾	Q																																																																																																																																																							
Drain and Indicating Components	A																																																																																																																																																							
Tubing & Fittings	Code																																																																																																																																																							
Stainless Steel 316	NN																																																																																																																																																							
Monel 400	MM																																																																																																																																																							
Super Duplex	DD																																																																																																																																																							

Notes:

(1) Other materials available see engineering data

(2) Coated internally and externally

(3) Supplied loose

(4) Consult BERMAD for availability

(5) For valves up to and including 10"

Notes:

- (1) Other materials available see engineering data
- (2) Coated internally and externally
- (3) Supplied loose
- (4) Consult BERMAD for availability
- (5) For valves up to and including 10"

* NO or NC refers to the main valve status when the Solenoid is de-energized

*More options available – consult BERMAD