HYDRAULICALLY CONTROLLED ON-OFF DELUGE VALVE

Model FP-400E-5D

The BERMAD Model 400E-5D is an elastomeric, hydraulic line pressure operated deluge valve, designed specifically for advanced fire protection systems and the latest industry standards.
The 400E-5D is activated by a hydraulic relay valve, by which opening and closing of the valve can be controlled remotely.
The 400E-5D is suited to systems with remote release wet pilot lines. The optional valve position indicator can include a limit switch suitable for Fire & Gas monitoring systems.

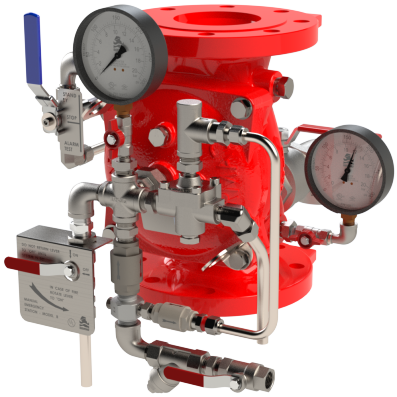

Features & Benefits

- Safety and reliability
  - Time proven, simple design with a fail safe actuation
  - Single piece rugged elastomer, VRSD technology
  - Obstacle-free, uninterrupted flow path
  - Valve position limit switches (optional)
  - Main valve with no mechanical moving parts
  - Meets the requirements of the industry standards
- Quick and easy maintenance
  - Designed for high reliability and easy maintenance
  - In-line serviceable
  - Fast and easy cover removal

Approvals

c UL us LISTED	UL-Listed Special System Water Control Valves, Deluge Type (VLFT) Sizes 1½" - 10"
DNV	Det Norske Veritas Type Approval Sizes 1½" to 12"
ABS TYPE APPROVED PRODUCT	ABS American Bureau of Shipping Type Approval Sizes 1½" - 12"
Lloyd's Register TA TYPE APPROVED	Lloyd's Register Type Approval Sizes 1½" - 10" Fire Test

Typical Applications

- Remote Control Water Spray Systems
- Flammable material storage
- Petrochemical facilities
- Power plants and transformers

Optional Features

- Valve position limit switches
- Alarm pressure switch
- Seawater compatibility
- Water motor alarm
- 316 Stainless Steel control trim
- Corrosion resistant zinc based high build epoxy coating

All images in this catalog are for illustration only

Operation

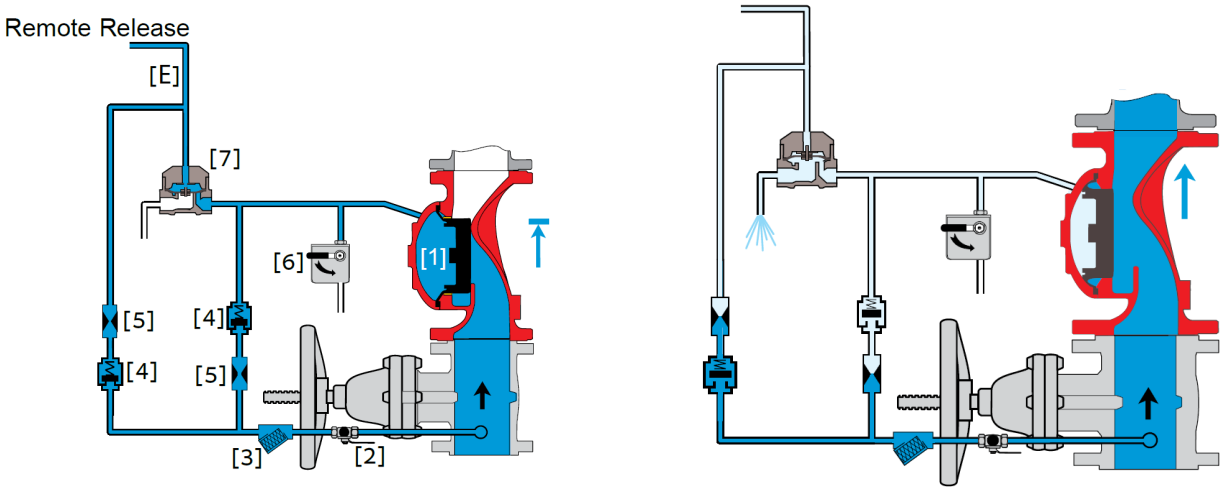

Valve Closed (normal conditions)

Valve Open (fire conditions)

The BERMAD model 400E-5D is held closed by water pressure in the control chamber [1]. Upon release of pressure from the control chamber, the valve opens.
Under NORMAL conditions, water pressure is supplied to the control chamber via the priming line [2] restriction orifice [5] and strainer [3], and is then trapped in the control chamber by a check valve [4], manual emergency release [6], and a relay valve (HRV) [7] that is held closed by hydraulic pilot line pressure [E]. The water pressure trapped in the main valve control chamber holds the diaphragm against the valve seat, sealing it drip-tight and keeping the system pipes dry.
Under FIRE conditions, water pressure is released from the control chamber, either with the manual emergency release, or by the HRV opening in response to a decrease in hydraulic line pressure [E]. This opens the 400E-5D deluge valve, allowing water to flow into the system piping.

System P&ID

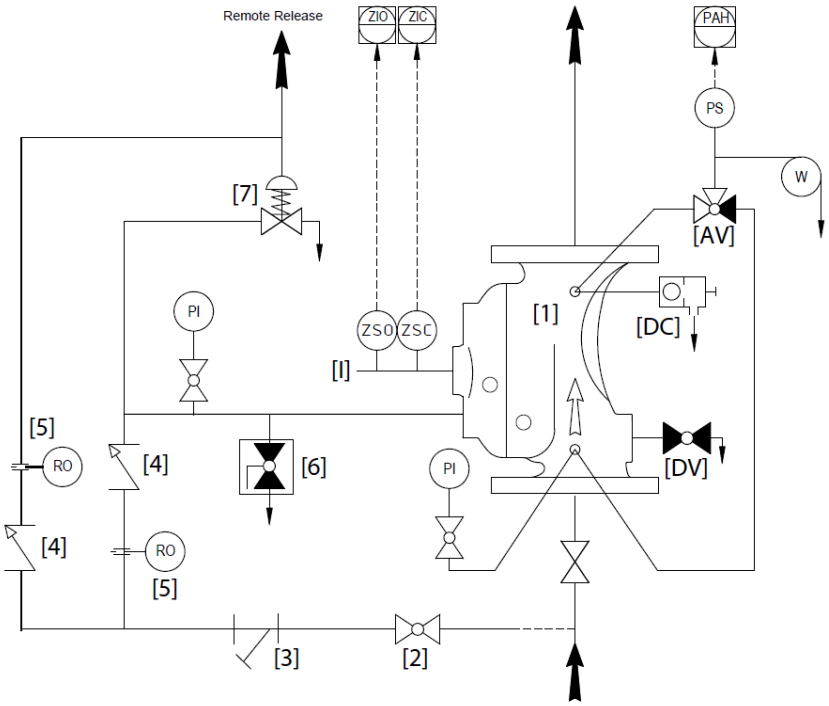

	Components
1	BERMAD 400E Deluge Valve
2	Priming Ball Valve
3	Priming Strainer
4	Check Valve
5	Restriction Orifice
6	Manual Emergency Release
7	HRV-2 Relay Valve

	Optional System Items
PS	Pressure Switch
W	Water Motor Alarm
ZS	Limit Switch Assembly
I	Visual Valve Position indicator
DV	Drain Valve*
PI	Pressure Gauge*
AV	3-way Alarm Test Valve*
DC	Automatic Drip Check Valve*

** Included with suffix A in valve code (drain and indicating components)*
See code designations and "factory supplied additional items" on page 4

System Installation

A typical installation of the BERMAD model 400E-5D features actuation via a hydraulic relay valve, held closed by hydraulic pressure applied or released remotely.
When open and fitted with a limit switch the valve can send a feedback signal to a remote valve status monitoring system.

Optional System Items

S.S. Glycerin Filled Pressure Gauge

Water Motor Alarm

S.S Pressure Switch E xd

Basket Strainer - 60F

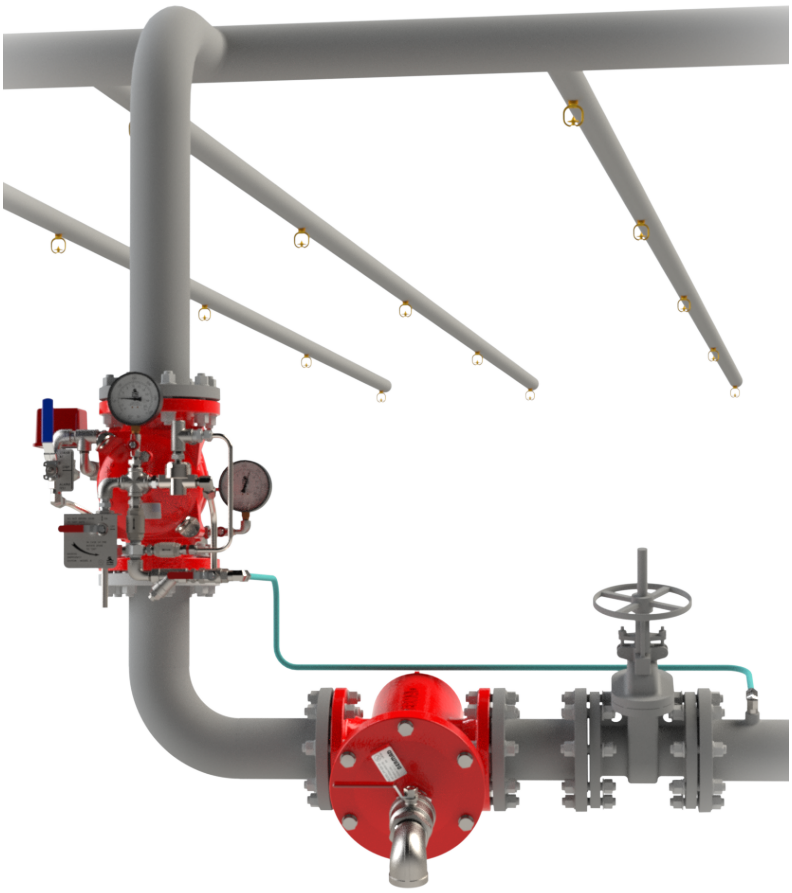

Suggested Specifications

The deluge valve shall be UL-listed, 250 psi/17.2 bar rated.
The valve shall have an unobstructed flow path, with no stem guide or supporting ribs.
The deluge valve shall have no mechanical moving parts, and the actuation shall utilize a single-piece diaphragm assembly of VRSD technology.
The valve shall be coated internally and externally with UV protection. Optional: C5-VH grade of ISO-12944 standard against corrosive conditions.
The control trim shall include an auxiliary relay valve, a manual emergency release unit, a Y-type strainer, two 4-inch pressure gauges, and an automatic drip-check with manual override.
Removing the valve cover for full inspection and maintenance shall be in-line, and not require removal of the valve from the pipeline.
The deluge valve and control trim shall be pre-assembled and hydraulically tested by a UL/FM and ISO 9000, 9001 certified factory.

All images in this catalog are for illustration only

Technical Data

Available Sizes:
Flanged- 1½, 2, 2½, 3, 4, 6, 8, 10 & 12"
Grooved- 2, 3, 4, 6, & 8"

Pressure Rating:
ANSI#150 - 17.2 bar | 250 psi
Grooved - 17.2 bar | 250 psi

Elastomer:
HTNR - Fabric Reinforced High Temperature Compound - See engineering data

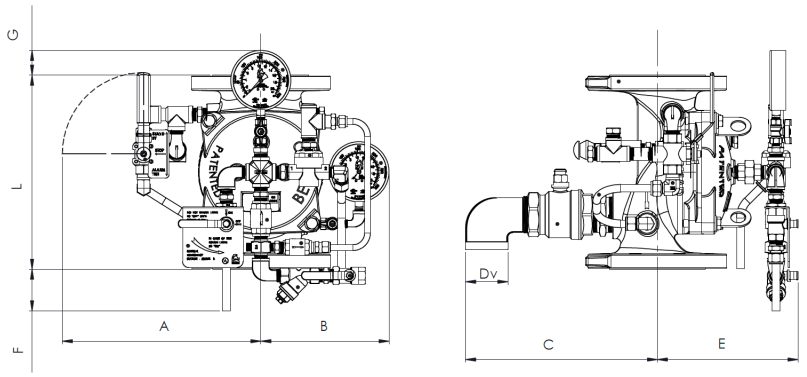

Valve Size	L #150 mm | in	L Grooved mm | in	A mm | in	B mm | in	C mm | in	øD in	E mm | in	F mm | in	G mm | in	Weight #150 kg | lb
DN40 | 1½"	205 | 8.1	-	313 | 12.3	196 | 7.7	199 | 7.8	¾"	176 | 6.9	126 | 5	100 | 3.9	16 | 35
DN50 | 2"	205 | 8.1	205 | 8.1	313 | 12.3	196 | 7.7	199 | 7.8	1½"	176 | 6.9	126 | 5	100 | 3.9	16 | 25
DN65 | 2½"	205 | 8.1	-	325 | 12.8	196 | 7.7	253 | 10	1½"	176 | 6.9	126 | 5	100 | 3.9	18 | 40
DN80 | 3"	257 | 10.1	250 | 9.8	345 | 13.6	205 | 8.1	266 | 10.5	1½"	211 | 8.3	100 | 3.9	74 | 2.9	29 | 64
DN100 | 4"	320 | 12.6	320 | 12.6	328 | 12.9	212 | 8.3	316 | 12.4	1½"	231 | 9	69 | 2.7	43 | 1.7	39 | 86
DN150 | 6"	415 | 16.3	415 | 16.3	349 | 13.7	204 | 8	347 | 13.7	2"	308 | 12.1	21 | 0.8	-	83 | 183
DN200 | 8"	500 | 19.7	-	383 | 15.1	270 | 10.6	364 | 14.3	2"	385 | 15.2	-	-	146 | 322
DN250 | 10"	605 | 23.8	-	396 | 15.6	280 | 11	384 | 15.1	2"	359 | 14.1	-	-	163 | 359
DN300 | 12"	725 | 28.5	-	438 | 17.2	333 | 13.1	422 | 16.6	2"	453 | 17.8	-	-	251 | 552

IMPORTANT: Dimensions for the trim envelope or extents refer to a vertical orientation and may vary with specific component positioning -Apart from the "L" dimension, allow a tolerance of at least ±15%

Valve Code Designations

FP	6"	400E-5D	03	V	C	A5	ER	NN	N6nW

Category	Code
Standard	FP
Seawater	FS
Foam	FC

Valve Size	
1½"	40 mm
2"	50 mm
2½"	60 mm
3"	80 mm
4"	100 mm
6"	150 mm
8"	200 mm
10"	250 mm
12"	300 mm

Notes:
(1) Other materials available see engineering data
(2) Coated internally and externally
(3) Supplied loose
(4) Consult BERMAD for availability
(5) For valves up to and including 10"

Additional Feature	Code
Closing Speed Control	01
Opening Speed	02
Opening & Closing Speed Control	03
None	-

Installation	Code
Vertical	V
Horizontal	H

Material Body & Cover (1)	Code
Ductile Iron A536 (2)	C
Steel ASTM A216 WCB (2)	S
Stainless Steel 316	N
Nickel Al Bronze C95800	U
Super Duplex Grade 5A	D

End Connections	Code
ANSI#150RF	A5
ANSI#150FF	a5
ISO PN16	16
Grooved ANSI C606	VI

Coating	Code
High Build Epoxy	ER
Zinc Based High Build Epoxy(5)	ZR
Uncoated	UC

Tubing & Fittings	Code
Stainless Steel 316	NN
Monel 400	MM
Super Duplex	DD

Factory Supplied Additional Items	Code
General Purpose NEMA-4 Pressure Switch	P
Ex Proof NEC, Div.1 Pressure Switch (3)	P7
Ex d ATEX Pressure Switch (3)	P9
Ex d Pressure Switch, SS316 Enclosure (3)	P9Jn
Ex d Pressure Switch, SS316 Enclosure, Monel Sensor (3)	P9mJn
Single Limit Switch, General Purpose	S
Single Ex d Proximity limit Switch	S9
Double Ex d Proximity Limit Switch	SS9
Double Ex d Proximity Limit Switch with SS316 Junction Box	SS9Jn
Pressure Gauge Assembly (3)	6
S.S Glycerin Pressure Gauge Assembly (3)	6n
Monel Pressure Gauge Assembly (3)	6m
Drain Valve	DV
Water Motor Alarm Assembly (3)	W
Special Elastomer (4)	E
Large Control Filter	F
Valve Position Indicator	I
S.S 316 Trim Accessories	N
S.S Solenoid Valve	K
Pressure Transmitter (3)	Q
Drain and Indicating Components	A

*More options available – consult BERMAD

The information contained herein may be changed by BERMAD without notice. BERMAD shall not be held liable for any errors.
© Copyright 2016-2026 BERMAD CS Ltd