

ELECTRICALLY CONTROLLED ON-OFF DELUGE VALVE

Model FP-400Y-2D

The BERMAD model 400Y-2D is an elastomeric, hydraulic line pressure operated deluge valve, designed specifically for advanced fire protection systems, and the latest industry standards. The 400Y-2D is activated by a 2-way solenoid valve, suitable for electric fire detection systems and is ideal for open nozzles with water or foam discharge. Available with electric components to suit any hazardous location and offered with an optional visual valve position indicator that can include a limit switch suitable for Fire & Gas monitoring systems.



Features & Benefits

- Safety and reliability
 - Time proven, simple design with a fail safe actuation
 - Single piece rugged elastomer, VRSD technology
 - Obstacle-free, uninterrupted flow path
 - No mechanical moving parts
 - Shuts off on remote command
- High performance
 - Very high flow efficiency
 - Approved for PN25 / 365 psi
 - Straight through Y type body
- Specifically-designed for fire protection
 - UL429A Listed 2-Way Solenoid Valve
 - Face-to-face length standardized to ISO 5752 EN 558-1
 - Meets the requirements of the industry standards
- Quick and easy maintenance
 - In-line serviceable
 - Fast and easy cover removal
 - Swivel mounted drain valves (for valves 3" and larger)

Typical Applications

- Electric fire detection systems with control panels
- Remote Control Water Spray Systems
- Foam applications
- Corrosive water systems

Approvals



UL-Listed
Special System Water Control
Valves, Deluge Type (VLFT)
Sizes 1½" - 16"



Det Norske Veritas
Type Approval
Sizes 1½" to 16"



ABS
American Bureau of Shipping
Type Approval
Sizes 1½" - 12"




Lloyd's Register
Type Approval
Sizes 1½" - 10"

Additional Features

- Valve position limit switches
- Local valve position indicator beacon
- Seawater compatibility
- Alarm pressure switch
- Drain valve/s inlet/outlet
- Corrosion resistant zinc based high build epoxy coating

Operation

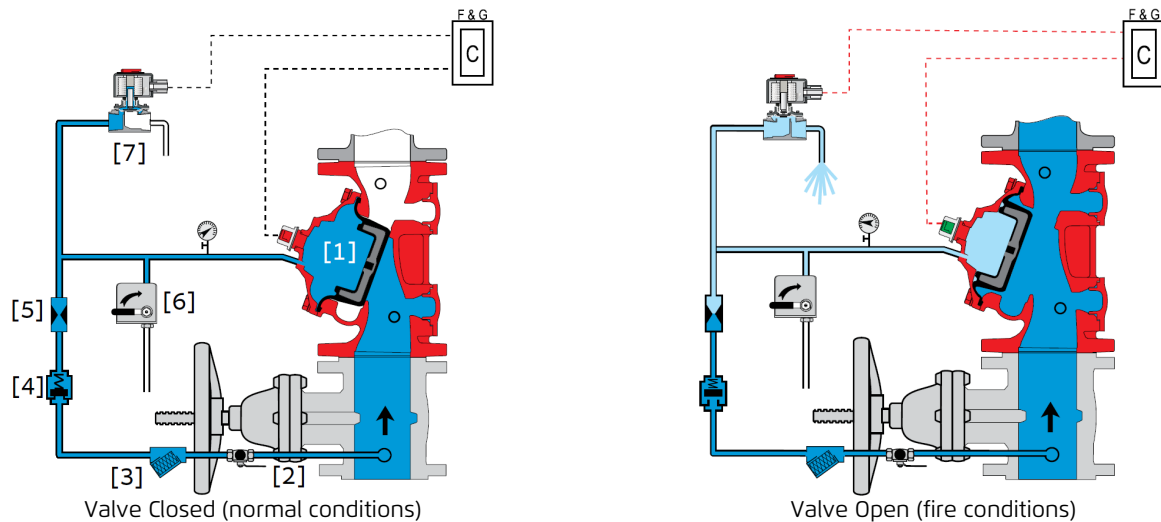

The BERMAD model 400Y-2D is held closed by water pressure in the control chamber [1].


Upon release of pressure from the control chamber, the valve opens.

Under **NORMAL conditions**, water pressure is supplied to the control chamber via the priming line [2], restriction orifice [5] and strainer [3], and is then trapped in the control chamber by a check valve [4], manual emergency release [6], and a 2-way Normally De-Energized solenoid valve [7].

The water pressure trapped in the main valve control chamber holds the diaphragm against the valve seat, sealing it drip-tight and keeping the system pipes dry.

Under **FIRE conditions**, water pressure is released from the control chamber, either with the manual emergency release, or by the solenoid valve being energized by the fire & gas control system [C]. This opens the 400Y-2D deluge valve, allowing water to flow into the system piping and alarm devices.

System P&ID

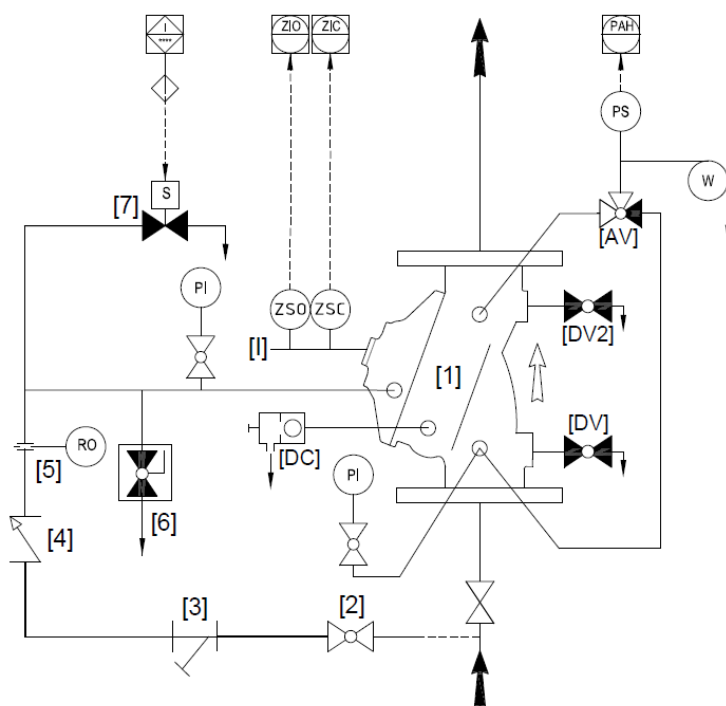

Components	
1	BERMAD 400Y Deluge Valve
2	Priming Ball Valve
3	Priming Strainer
4	Check valve
5	Restriction Orifice
6	Manual Emergency Release
7	2-Way NC Solenoid Valve

Optional System Items	
PS	Pressure Switch
W	Water Motor Alarm
ZS	Limit Switch Assembly
DV2	Downstream Drain valve
I	Visual Valve Position indicator
DV	Drain Valve*
PI	Pressure Gauge*
AV	3-way Alarm Test Valve*
DC	Automatic Drip Check Valve*

* Included with suffix A in valve code (drain and indicating components)
See code designations and "factory supplied additional items" on page 4

System Installation

A typical installation of the BERMAD model 400Y-2D features actuation via a 2-way solenoid valve, triggered by a signal from a fire & gas control system or an on-site emergency pushbutton. When open and fitted with a limit switch the valve can send a feedback signal to a remote valve status monitoring system.

Optional System Items




Pressure Gauge


Visual Position
Indicator

Rotating Limit
Switch Box

Exd Pressure
Switch - Stainless
Steel Enclosure for
Harsh

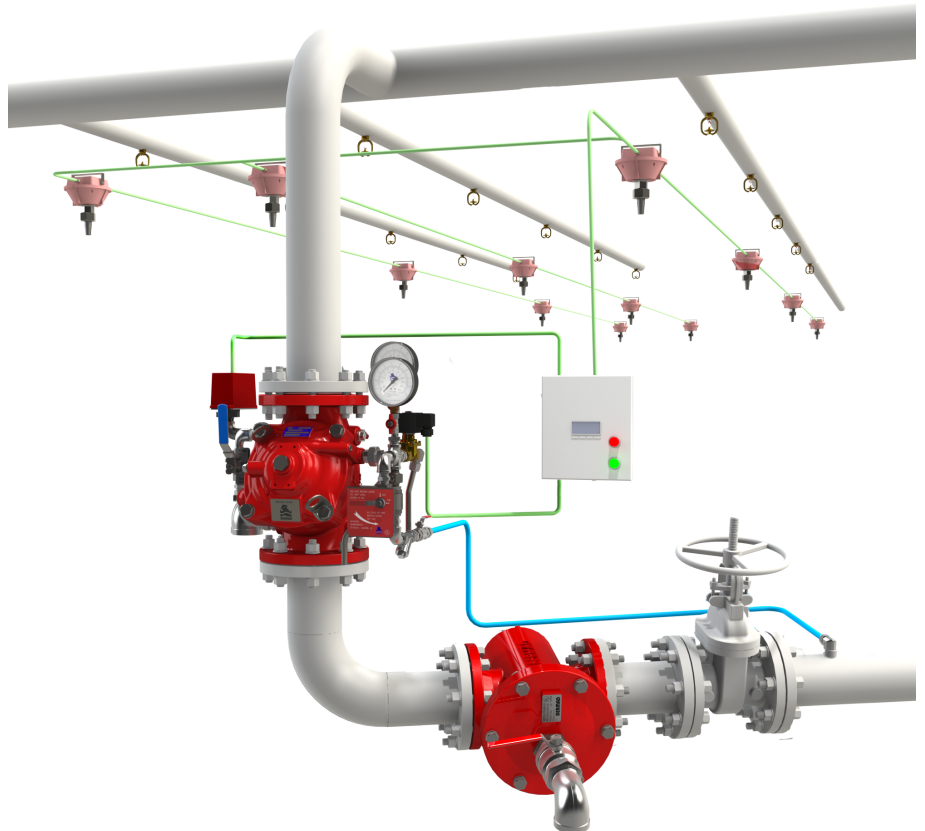Environments
Basket Strainer -
60F


Suggested Specifications

The deluge valve shall be UL-listed, 365-psi/25-bar rated, with a straight-through, Ytypebody.

The valve shall have an unobstructed flow path, with no stem guide or supporting ribs.

The deluge valve shall have no mechanical moving parts, and the actuation shall utilize a single-piece diaphragm assembly of VRSD technology.

The valve shall be coated internally and externally with UV protection. Optional: C5-VH grade of ISO-12944 standard against corrosive conditions.

The solenoid valve shall be a 2-way FM and UL429A-listed for 365 psi/25 bar with 65% of the rated voltage.

The control trim shall include a manual emergency release unit, a Y-type strainer, two 4-inch pressure gauges, an automatic drip-check with manual override, and a ball drain valve with a 360 degree swivel.

A valve position indicator shall be provided, and equipped with two proximity limit switches.

Removing the valve cover for full inspection and maintenance shall be in-line and not require removal of the control trim.

The deluge valve and control trim shall be pre-assembled and hydraulically tested by a UL/FM and ISO 9000, 9001 certified factory.

Technical Data

Available Sizes:

Flanged- 1½, 2, 2½, 3, 4, 6, 8, 10, 12, 14 & 16"

Grooved- 1½, 2, 2½, 3, 4, 6, 8 & 10"

Pressure Rating:

ANSI#150 - 17.2 bar | 250 psi

ANSI#300 - 1½" to 10" - 25 bar | 365 psi


ANSI#300 - 12" to 16" - 20 bar | 300 psi

Grooved - 17.2 / 25 bar | 250 / 365 psi

Elastomer:

HTNR - Fabric Reinforced High Temperature

Compound - See engineering data

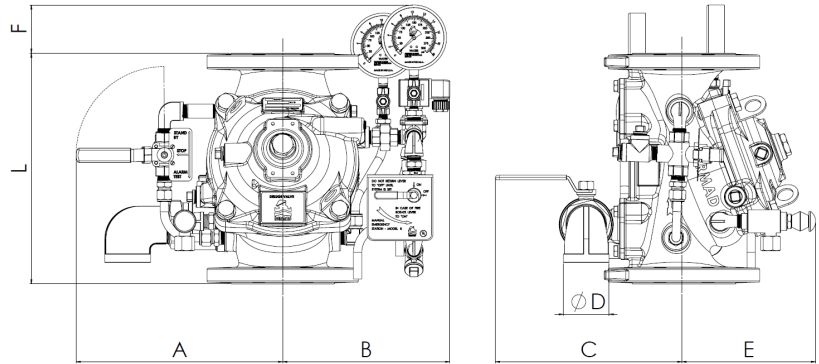

Valve Size	L #150 mm in	L Grooved mm in	L #300 mm in	A mm in	B mm in	C mm in	ØD in	E mm in	F mm in	G mm in
DN40 1½"	230 9.1	230 9.1	230 9.1	293 11.5	-	177 7	¾"	-	-	-
DN50 2"	230 9.1	230 9.1	238 9.4	293 11.5	-	177 7	¾"	-	-	-
DN65 2½"	235 9.3	235 9.3	241 9.5	293 11.6	-	177 7.2	1½"	-	-	-
DN80 3"	310 12.2	310 12.2	326 12.8	313 12.3	-	177 7	1½"	-	-	-
DN100 4"	350 13.8	350 13.8	368 14.5	343 13.5	-	287 11.3	2"	-	-	-
DN150 6"	480 18.9	480 18.9	506 19.9	358 14	-	302 11.9	2"	-	-	-
DN200 8"	600 23.6	600 23.6	626 24.7	392 15.4	-	317 12.5	2"	-	-	-
DN250 10"	730 28.7	730 28.7	730 28.7	406 16	-	317 12.5	2"	-	-	-
DN300 12"	850 33.5	-	888 35	478 18.8	-	380 15	2"	-	-	-
DN350 14"	980 38.6	-	980 38.6	478 18.8	-	379 14.9	2"	-	-	-
DN400 16"	1100 43.3	-	1100 43.3	478 18.8	-	405 16.1	2"	-	-	-

IMPORTANT: Dimensions for the trim envelope or extents refer to a vertical orientation and may vary with specific component positioning - Apart from the "L" dimension, allow a tolerance of at least ±15%

Valve Code Designations

FP

6"

Category	Code
Standard	FP
Seawater	FS
Foam	FC

Valve Size	
1½"	40 mm
2"	50 mm
2½"	60 mm ⁽⁶⁾
3"	80 mm
4"	100 mm
6"	150 mm
8"	200 mm
10"	250 mm
12"	300 mm
14"	350 mm
16"	400 mm

400Y-2D

03

V

C

A5

ER

4DC

NN

N6nW

Installation	Code
Vertical	V
Horizontal	H

Material Body & Cover ⁽¹⁾	Code
Ductile Iron A356 ⁽²⁾	C
Steel ASTM A216 WCB ⁽²⁾	S
Stainless Steel 316	N
Nickel Al Bronze C95800	U
Super Duplex Grade 5A	D

End Connections	Code
ANSI#150RF	A5
ANSI#150FF	a5
ANSI#300RF	A3
ANSI#300FF	a3
ISO PN16	16
ISO PN25	25
Grooved Class 250psi/17.2bar ⁽⁵⁾	VI
Grooved Class 365psi/25bar ⁽⁵⁾	V2

Additional Feature	Code
Closing Speed Control	01
Opening Speed Control	02
Opening & Closing Speed Control	03
None	-

Coating	Code
High Build Epoxy	ER
Zinc Based High Build Epoxy ⁽⁵⁾	ZR
Uncoated	UC

Voltage - Main Valve N.O. or N.C. *	Code
24VDC - N.C.	4DC
24VDC - N.O.	4DO
24VDC - Latch	4DS
110VDC - N.C.	5DC
110VDC - N.O.	5DO
110 - 120/AC - N.C.	5AC
110 - 120/AC - N.C.	5AO
220 - 240/AC - N.C.	2AC
221 - 240/AC - N.C.	2AO

Tubing & Fittings	Code
Stainless Steel 316	NN
Monel 400	MM
Super Duplex	DD

Factory Supplied Additional Items	Code
General Purpose NEMA-4 Pressure Switch	P
Ex Proof NEC, Div.1 Pressure Switch ⁽³⁾	P7
Ex d ATEX Pressure Switch ⁽³⁾	P9
Ex d Pressure Switch, SS316 Enclosure ⁽³⁾	P9Jn
Ex d Pressure Switch, SS316 Enclosure, Monel Sensor ⁽³⁾	P9mJn
Single Limit Switch, General Purpose	S
Single Ex d Proximity limit Switch	S9
Double Ex d Proximity Limit Switch	SS9
Double Ex d Proximity Limit Switch with SS316 Junction Box	SS9Jn
Pressure Gauge Assembly ⁽³⁾	6
S.S Glycerin Pressure Gauge Assembly ⁽³⁾	6n
Monel Pressure Gauge Assembly ⁽³⁾	6m
Ex Proof NEC Class 1 Div 1 Solenoid	7
Ex. d Atex Solenoid	9
Magna Latch – 2 wires	H2
Magna Latch – 3 wires	H3
Stainless steel 316 Solenoid Valve	K
Drain Valve	DV
Water Motor Alarm Assembly ⁽³⁾	W
Large Control Filter	F
Valve Position Indicator	I
S.S 316 Trim Accessories	N
S.S Solenoid Valve	K
Pressure Transmitter ⁽³⁾	Q
Drain and Indicating Components	A

Notes:

(1) Other materials available see engineering data

(2) Coated internally and externally

(3) Supplied loose

(4) Consult BERMAD for availability

(5) For valves up to and including 10"

(6) Available in Ductile Iron only

Notes:

- (1) Other materials available see engineering data
- (2) Coated internally and externally
- (3) Supplied loose
- (4) Consult BERMAD for availability
- (5) For valves up to and including 10"
- (6) Available in Ductile Iron only

* NO or NC refers to the main valve status when the Solenoid is de-energized

*More options available – consult BERMAD