

HYDRAULICALLY CONTROLLED ON-OFF DELUGE VALVE

Model FP-400Y-5D

The BERMAD Model 400Y-5D is an elastomeric, hydraulic line pressure operated deluge valve, designed specifically for advanced fire protection systems and the latest industry standards. The 400Y-5D is activated by a hydraulic relay valve, by which opening and closing of the valve can be controlled remotely.

The 400Y-5D is suited to systems with remote release wet pilot lines. The optional valve position indicator can include a limit switch suitable for Fire & Gas monitoring systems.



Features & Benefits

- Safety and reliability
 - Time proven, simple design with a fail safe actuation
 - Single piece rugged elastomer, VRSD technology
 - Obstacle-free, uninterrupted flow path
 - No mechanical moving parts
 - Valve position limit switches (optional)
 - Reduced valve opening time, enabling faster fire suppression
- High performance
 - Very high flow efficiency
 - Approved for PN25 / 365 psi
 - Straight through Y type body
- Specifically-designed for fire protection
 - Face-to-face length standardized to ISO 5752 EN 558-1
 - Meets the requirements of the industry standards
- Quick and easy maintenance
 - In-line serviceable
 - Fast and easy cover removal
 - Swivel mounted drain valves (for valves 3" and larger)

Typical Applications

- Remote Control Water Spray Systems
- Foam applications
- Petrochemical facilities
- Power plants and transformers
- Flammable material storage

Approvals



UL-Listed
Special System Water Control
Valves, Deluge Type (VLFT)
Sizes 1½" - 16"



Det Norske Veritas
Type Approval
Sizes 1½" to 16"



ABS
American Bureau of Shipping
Type Approval
Sizes 1½" - 12"





Lloyd's Register
Type Approval
Sizes 1½" - 10"

Additional Features

- Valve position limit switches
- Local valve position indicator beacon
- Alarm pressure switch
- Drain valve/s inlet/outlet
- For "automatic activation" select BERMAD local or remote reset model

Operation

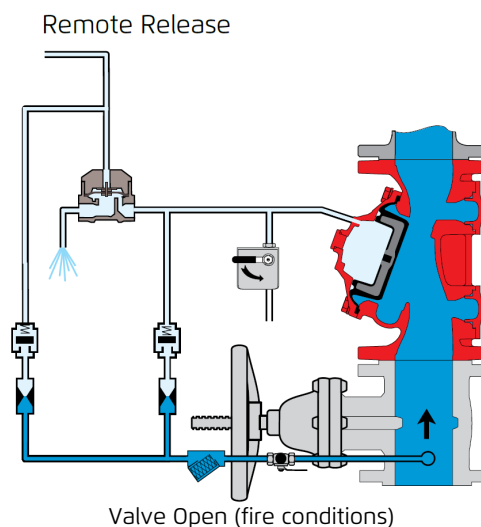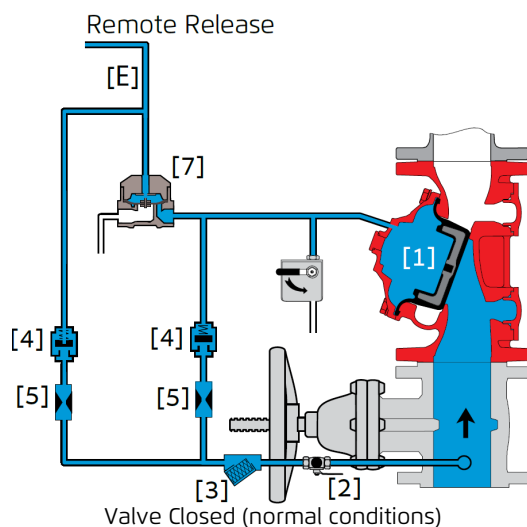


The BERMAD model 400Y-5D is held closed by water pressure in the control chamber [1]. Upon release of pressure from the control chamber, the valve opens.

Under NORMAL conditions, water pressure is supplied to the control chamber via the priming line [2] restriction orifice [5] and strainer [3], and is then trapped in the control chamber by a check valve [4], manual emergency release [6], and a relay valve (HRV) [7] that is held closed by hydraulic pilot line pressure [E]. The water pressure trapped in the main valve control chamber holds the diaphragm against the valve seat, sealing it drip-tight and keeping the system pipes dry.

Under FIRE conditions, water pressure is released from the control chamber, either with the manual emergency release, or by the HRV opening in response to a decrease in hydraulic line pressure [E]. This opens the 400Y-5D deluge valve, allowing water to flow into the system piping.

System P&ID

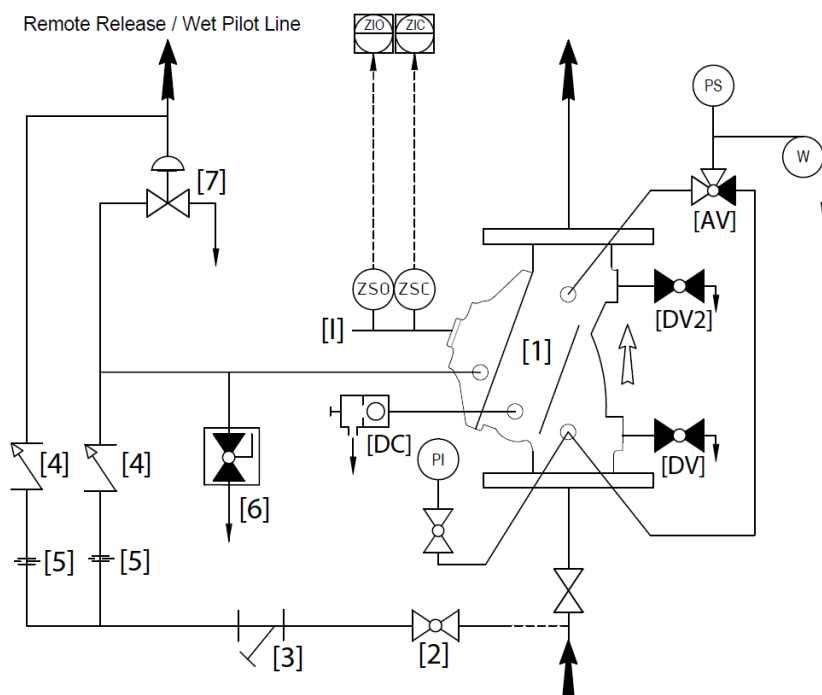

Components	
1	BERMAD 400Y Deluge Valve
2	Priming Ball Valve
3	Priming Strainer
4	Check Valve
5	Restriction Orifice
6	Manual Emergency Release
7	HRV-Hydraulic Relay Valve

* Included with suffix A in valve code (drain and indicating components)
See code designations and "factory supplied additional items" on page 4

System Installation

A typical installation of the BERMAD model 400Y-5D features actuation via a hydraulic relay valve. When open and fitted with a limit switch the valve can send a feedback signal to a remote valve status monitoring system.

Optional System Items



Pressure Gauge




Visual Position Indicator



Rotating Limit Switch Box



Exd Pressure Switch - Stainless Steel Enclosure for Harsh Environments
Basket Strainer - 60F

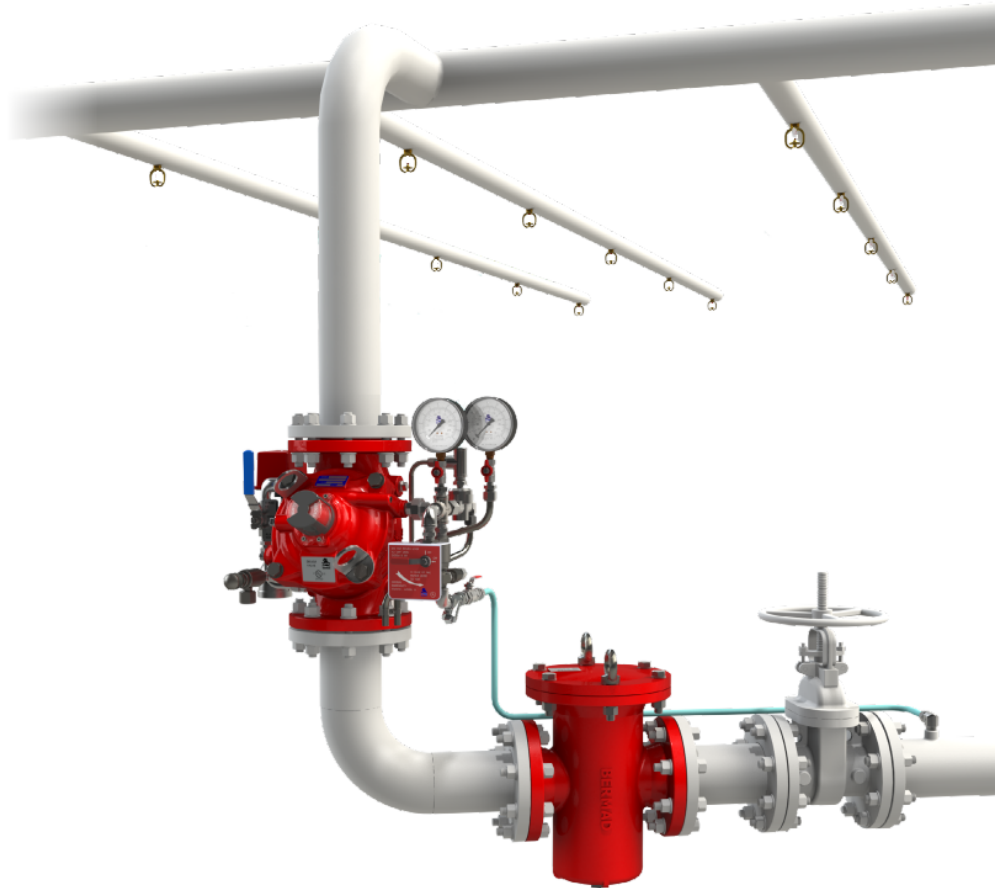

Suggested Specifications

The deluge valve shall be UL-listed, 365-psi/25-bar rated, with a straight-through, Ytypebody.

The valve shall have an unobstructed flow path, with no stem guide or supporting ribs.

The deluge valve shall have no mechanical moving parts, and the actuation shall utilize a single-piece diaphragm assembly of VRSD technology.

The valve shall be coated internally and externally with UV protection. Optional: C5-VH grade of ISO-12944 standard against corrosive conditions.

The control trim shall include an auxiliary relay valve, a manual emergency release unit, a Y-type strainer, two 4-inch pressure gauges, an automatic drip-check with manual override, and a ball drain valve with a 360 degree swivel.

A valve position indicator shall be provided, and equipped with two proximity limit switches.

Removing the valve cover for full inspection and maintenance shall be in-line and not require removal of the control trim.

The deluge valve and control trim shall be pre-assembled and hydraulically tested by a UL/FM and ISO 9000, 9001 certified factory.

Technical Data

Available Sizes:

Flanged- 1½, 2, 2½, 3, 4, 6, 8, 10, 12, 14 & 16"

Grooved- 1½, 2, 2½, 3, 4, 6, 8 & 10"

Pressure Rating:

ANSI#150 - 17.2 bar | 250 psi


ANSI#300 - 1½" to 10" - 25 bar | 365 psi

ANSI#300 - 12" to 16" - 20 bar | 300 psi

Grooved - 17.2 / 25 bar | 250 / 365 psi

Elastomer:

HTNR - Fabric Reinforced High Temperature Compound - See engineering data

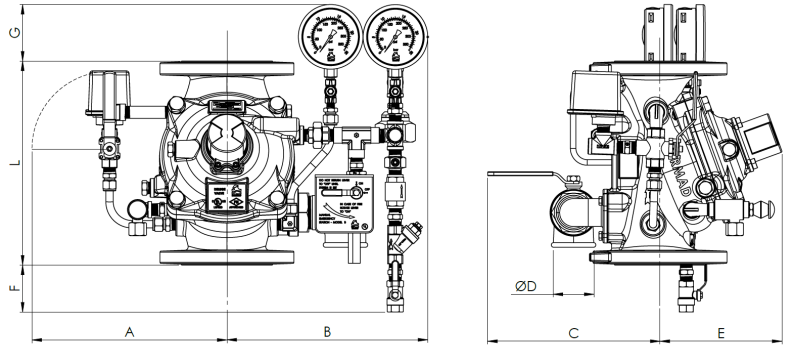

Valve Size	L #150 mm in	L Grooved mm in	L #300 mm in	A mm in	B mm in	C mm in	ØD in	E mm in	F mm in	G mm in
DN40 1½"	230 9.1	230 9.1	230 9.1	293 11.5	-	177 7	¾"	-	-	-
DN50 2"	230 9.1	230 9.1	238 9.4	293 11.5	-	177 7	¾"	-	-	-
DN65 2½"	235 9.3	235 9.3	241 9.5	293 11.6	-	177 7.2	1½"	-	-	-
DN80 3"	310 12.2	310 12.2	326 12.8	313 12.3	-	177 7	1½"	-	-	-
DN100 4"	350 13.8	350 13.8	368 14.5	343 13.5	-	287 11.3	2"	-	-	-
DN150 6"	480 18.9	480 18.9	506 19.9	358 14	-	302 11.9	2"	-	-	-
DN200 8"	600 23.6	600 23.6	626 24.7	392 15.4	-	317 12.5	2"	-	-	-
DN250 10"	730 28.7	730 28.7	730 28.7	406 16	-	317 12.5	2"	-	-	-
DN300 12"	850 33.5	-	888 35	478 18.8	-	380 15	2"	-	-	-
DN350 14"	980 38.6	-	980 38.6	478 18.8	-	379 14.9	2"	-	-	-
DN400 16"	1100 43.3	-	1100 43.3	478 18.8	-	405 16.1	2"	-	-	-

IMPORTANT: Dimensions for the trim envelope or extents refer to a vertical orientation and may vary with specific component positioning - Apart from the "L" dimension, allow a tolerance of at least ±15%

Valve Code Designations

FP	6"	400Y-5D	03	V	C	A5	ER	NN	N6nW																																																																																				
<table><tr><th>Category</th><th>Code</th></tr><tr><td>Standard</td><td>FP</td></tr><tr><td>Seawater</td><td>FS</td></tr><tr><td>Foam</td><td>FC</td></tr></table>		Category	Code	Standard	FP	Seawater	FS	Foam	FC	<table><tr><th>Installation</th><th>Code</th></tr><tr><td>Vertical</td><td>V</td></tr><tr><td>Horizontal</td><td>H</td></tr></table>		Installation	Code	Vertical	V	Horizontal	H	<table><tr><th>End Connection</th><th>Code</th></tr><tr><td>ANSI#150RF</td><td>A5</td></tr><tr><td>ANSI#150FF</td><td>a5</td></tr><tr><td>ANSI#300RF</td><td>A3</td></tr><tr><td>ANSI#300FF</td><td>a3</td></tr><tr><td>ISO PN16</td><td>16</td></tr><tr><td>ISO PN25</td><td>25</td></tr><tr><td>Grooved 17.2bar/250psi⁽⁵⁾</td><td>VI</td></tr><tr><td>Grooved 25bar/365psi⁽⁵⁾</td><td>V2</td></tr></table>		End Connection	Code	ANSI#150RF	A5	ANSI#150FF	a5	ANSI#300RF	A3	ANSI#300FF	a3	ISO PN16	16	ISO PN25	25	Grooved 17.2bar/250psi ⁽⁵⁾	VI	Grooved 25bar/365psi ⁽⁵⁾	V2	<table><tr><th>Coating</th><th>Code</th></tr><tr><td>High Build Epoxy</td><td>ER</td></tr><tr><td>Zinc Based High Build Epoxy⁽⁵⁾</td><td>ZR</td></tr><tr><td>Uncoated</td><td>UC</td></tr></table>		Coating	Code	High Build Epoxy	ER	Zinc Based High Build Epoxy ⁽⁵⁾	ZR	Uncoated	UC	<table><tr><th>Factory Supplied Additional Items*</th><th>Code</th></tr><tr><td>General Purpose NEMA-4 Pressure Switch</td><td>P</td></tr><tr><td>Ex Proof NEC, Div.1 Pressure Switch⁽³⁾</td><td>P7</td></tr><tr><td>Ex d ATEX Pressure Switch⁽³⁾</td><td>P9</td></tr><tr><td>Ex d Pressure Switch, SS316 Enclosure⁽³⁾</td><td>P9Jn</td></tr><tr><td>Ex d Pressure Switch, SS316 Enclosure, Monel Sensor⁽³⁾</td><td>P9mJn</td></tr><tr><td>Single Limit Switch, General Purpose</td><td>S</td></tr><tr><td>Single Ex d Proximity limit Switch</td><td>S9</td></tr><tr><td>Double Ex d Proximity Limit Switch</td><td>SS9</td></tr><tr><td>Double Ex d Proximity Limit Switch with SS316 Junction Box</td><td>SS9Jn</td></tr><tr><td>Pressure Gauge Assembly⁽³⁾</td><td>6</td></tr><tr><td>S.S Glycerin Pressure Gauge Assembly⁽³⁾</td><td>6n</td></tr><tr><td>Monel Pressure Gauge Assembly⁽³⁾</td><td>6m</td></tr><tr><td>Drain Valve</td><td>DV</td></tr><tr><td>Water Motor Alarm Assembly⁽³⁾</td><td>W</td></tr><tr><td>Special Elastomer⁽⁴⁾</td><td>E</td></tr><tr><td>Large Control Filter</td><td>F</td></tr><tr><td>Valve Position Indicator</td><td>I</td></tr><tr><td>S.S 316 Trim Accessories</td><td>N</td></tr><tr><td>Pressure Transmitter⁽³⁾</td><td>Q</td></tr><tr><td>Drain and Indicating Components</td><td>A</td></tr><tr><td>Mechanical latch – Manual Reset</td><td>H</td></tr></table>		Factory Supplied Additional Items*	Code	General Purpose NEMA-4 Pressure Switch	P	Ex Proof NEC, Div.1 Pressure Switch ⁽³⁾	P7	Ex d ATEX Pressure Switch ⁽³⁾	P9	Ex d Pressure Switch, SS316 Enclosure ⁽³⁾	P9Jn	Ex d Pressure Switch, SS316 Enclosure, Monel Sensor ⁽³⁾	P9mJn	Single Limit Switch, General Purpose	S	Single Ex d Proximity limit Switch	S9	Double Ex d Proximity Limit Switch	SS9	Double Ex d Proximity Limit Switch with SS316 Junction Box	SS9Jn	Pressure Gauge Assembly ⁽³⁾	6	S.S Glycerin Pressure Gauge Assembly ⁽³⁾	6n	Monel Pressure Gauge Assembly ⁽³⁾	6m	Drain Valve	DV	Water Motor Alarm Assembly ⁽³⁾	W	Special Elastomer ⁽⁴⁾	E	Large Control Filter	F	Valve Position Indicator	I	S.S 316 Trim Accessories	N	Pressure Transmitter ⁽³⁾	Q	Drain and Indicating Components	A	Mechanical latch – Manual Reset	H
Category	Code																																																																																												
Standard	FP																																																																																												
Seawater	FS																																																																																												
Foam	FC																																																																																												
Installation	Code																																																																																												
Vertical	V																																																																																												
Horizontal	H																																																																																												
End Connection	Code																																																																																												
ANSI#150RF	A5																																																																																												
ANSI#150FF	a5																																																																																												
ANSI#300RF	A3																																																																																												
ANSI#300FF	a3																																																																																												
ISO PN16	16																																																																																												
ISO PN25	25																																																																																												
Grooved 17.2bar/250psi ⁽⁵⁾	VI																																																																																												
Grooved 25bar/365psi ⁽⁵⁾	V2																																																																																												
Coating	Code																																																																																												
High Build Epoxy	ER																																																																																												
Zinc Based High Build Epoxy ⁽⁵⁾	ZR																																																																																												
Uncoated	UC																																																																																												
Factory Supplied Additional Items*	Code																																																																																												
General Purpose NEMA-4 Pressure Switch	P																																																																																												
Ex Proof NEC, Div.1 Pressure Switch ⁽³⁾	P7																																																																																												
Ex d ATEX Pressure Switch ⁽³⁾	P9																																																																																												
Ex d Pressure Switch, SS316 Enclosure ⁽³⁾	P9Jn																																																																																												
Ex d Pressure Switch, SS316 Enclosure, Monel Sensor ⁽³⁾	P9mJn																																																																																												
Single Limit Switch, General Purpose	S																																																																																												
Single Ex d Proximity limit Switch	S9																																																																																												
Double Ex d Proximity Limit Switch	SS9																																																																																												
Double Ex d Proximity Limit Switch with SS316 Junction Box	SS9Jn																																																																																												
Pressure Gauge Assembly ⁽³⁾	6																																																																																												
S.S Glycerin Pressure Gauge Assembly ⁽³⁾	6n																																																																																												
Monel Pressure Gauge Assembly ⁽³⁾	6m																																																																																												
Drain Valve	DV																																																																																												
Water Motor Alarm Assembly ⁽³⁾	W																																																																																												
Special Elastomer ⁽⁴⁾	E																																																																																												
Large Control Filter	F																																																																																												
Valve Position Indicator	I																																																																																												
S.S 316 Trim Accessories	N																																																																																												
Pressure Transmitter ⁽³⁾	Q																																																																																												
Drain and Indicating Components	A																																																																																												
Mechanical latch – Manual Reset	H																																																																																												
<table><tr><th>Valve Size</th><th></th></tr><tr><td>1½"</td><td>40 mm</td></tr><tr><td>2"</td><td>50 mm</td></tr><tr><td>2½"</td><td>65 mm⁽⁶⁾</td></tr><tr><td>3"</td><td>80 mm</td></tr><tr><td>4"</td><td>100 mm</td></tr><tr><td>6"</td><td>150 mm</td></tr><tr><td>8"</td><td>200 mm</td></tr><tr><td>10"</td><td>250 mm</td></tr><tr><td>12"</td><td>300 mm</td></tr><tr><td>14"</td><td>350 mm</td></tr><tr><td>16"</td><td>400 mm</td></tr></table>		Valve Size		1½"	40 mm	2"	50 mm	2½"	65 mm ⁽⁶⁾	3"	80 mm	4"	100 mm	6"	150 mm	8"	200 mm	10"	250 mm	12"	300 mm	14"	350 mm	16"	400 mm	<table><tr><th>Material Body & Cover⁽¹⁾</th><th>Code</th></tr><tr><td>Ductile Iron A356⁽²⁾</td><td>C</td></tr><tr><td>Steel ASTM A216 WCB⁽²⁾</td><td>S</td></tr><tr><td>Stainless Steel 316</td><td>N</td></tr><tr><td>Nickel Al Bronze C95800</td><td>U</td></tr><tr><td>Super Duplex Grade 5A</td><td>D</td></tr></table>		Material Body & Cover ⁽¹⁾	Code	Ductile Iron A356 ⁽²⁾	C	Steel ASTM A216 WCB ⁽²⁾	S	Stainless Steel 316	N	Nickel Al Bronze C95800	U	Super Duplex Grade 5A	D	<table><tr><th>Additional Feature</th><th>Code</th></tr><tr><td>Closing Speed Control</td><td>01</td></tr><tr><td>Opening Speed Control</td><td>02</td></tr><tr><td>Opening & Closing Speed Control</td><td>03</td></tr><tr><td>None</td><td>-</td></tr></table>		Additional Feature	Code	Closing Speed Control	01	Opening Speed Control	02	Opening & Closing Speed Control	03	None	-	<table><tr><th>Tubing & Fittings</th><th>Code</th></tr><tr><td>Stainless Steel 316</td><td>NN</td></tr><tr><td>Monel 400</td><td>MM</td></tr><tr><td>Super Duplex</td><td>DD</td></tr></table>		Tubing & Fittings	Code	Stainless Steel 316	NN	Monel 400	MM	Super Duplex	DD																																
Valve Size																																																																																													
1½"	40 mm																																																																																												
2"	50 mm																																																																																												
2½"	65 mm ⁽⁶⁾																																																																																												
3"	80 mm																																																																																												
4"	100 mm																																																																																												
6"	150 mm																																																																																												
8"	200 mm																																																																																												
10"	250 mm																																																																																												
12"	300 mm																																																																																												
14"	350 mm																																																																																												
16"	400 mm																																																																																												
Material Body & Cover ⁽¹⁾	Code																																																																																												
Ductile Iron A356 ⁽²⁾	C																																																																																												
Steel ASTM A216 WCB ⁽²⁾	S																																																																																												
Stainless Steel 316	N																																																																																												
Nickel Al Bronze C95800	U																																																																																												
Super Duplex Grade 5A	D																																																																																												
Additional Feature	Code																																																																																												
Closing Speed Control	01																																																																																												
Opening Speed Control	02																																																																																												
Opening & Closing Speed Control	03																																																																																												
None	-																																																																																												
Tubing & Fittings	Code																																																																																												
Stainless Steel 316	NN																																																																																												
Monel 400	MM																																																																																												
Super Duplex	DD																																																																																												

Notes:

(1) Other materials available see engineering data

(2) Coated internally and externally

(3) Supplied loose

*More options available, consult OEM/MAF

Notes:

(1) Other materials available see engineering data

(2) Coated internally and externally

(3) Supplied loose

(4) Consult BERMAD for availability

(5) For valves up to and including 10"

*More options available – consult BERMAD