

ELECTRO-PNEUMATICALLY CONTROLLED DELUGE VALVE WITH REMOTE RESET

Model FP-400Y-6U

The BERMAD model 400Y-6U is an elastomeric, hydraulic, line pressure operated deluge valve, designed specifically for advanced fire protection systems and the latest industry standards. The 400Y-6U is activated by a 3-way solenoid valve which in turn activates a 3 way pneumatic relay valve to open the deluge valve. It is available with a latching option that maintains the deluge valve open until de-latched remotely. The 400Y-6U is ideal for systems with open nozzles for water or foam discharge and is offered with electric components to suit any hazardous location. The optional valve position indicator can include a limit switch suitable for Fire & Gas monitoring systems.



Features & Benefits

- Safety and reliability
 - Time proven, simple design with a fail safe actuation
 - Single piece rugged elastomer, VRSD technology
 - Obstacle-free, uninterrupted flow path
 - No mechanical moving parts
 - Valve position limit switches (optional)
 - Local valve position indicator beacon (optional)
- High performance
 - Very high flow efficiency
 - Straight through Y type body
 - Approved for PN25 / 365 psi
- Specifically-designed for fire protection
 - Face-to-face length standardized to ISO 5752 EN 558-1
 - Latching Option
 - Meets the requirements of the industry standards
- Quick and easy maintenance
 - In-line serviceable
 - Fast and easy cover removal
 - Swivel mounted drain valves (for valves 3" and larger)

Approvals



UL-Listed
Special System Water Control
Valves, Deluge Type (VLFT)
Sizes 1½" - 16"



FM Approved
for Deluge Sprinkler Systems
Sizes 1½" - 8"



ABS
American Bureau of Shipping
Type Approval
Sizes 1½" - 12"



Det Norske Veritas
Type Approval
Sizes 1½" to 16"



Lloyd's Register
Type Approval
Sizes 1½" - 10"



Typical Applications

- Electric fire detection systems with control panels
- Automatic water spray systems
- Foam applications
- Corrosive water systems

Additional Features

- Valve position limit switches
- Local valve position indicator beacon
- Magna-Latch Solenoid option
- Seawater compatibility
- Remote Reset (remote de-latch)
- Drain valve/s inlet/outlet
- Air Maintenance Device
- Corrosion resistant zinc based high build epoxy coating

Operation

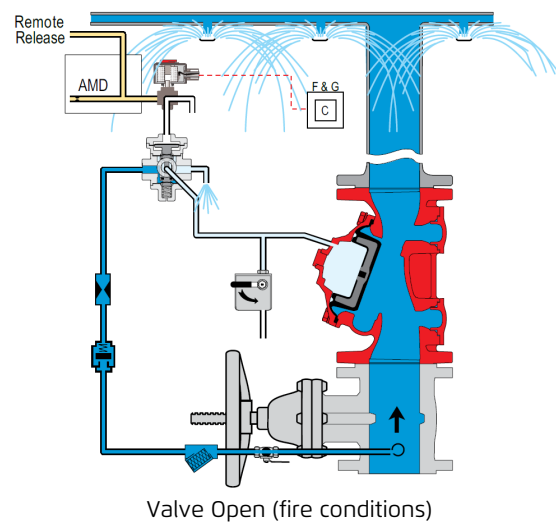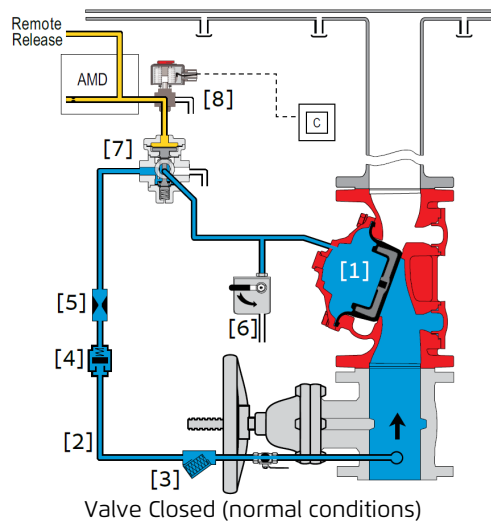


The BERMAD model 400Y-6U is held closed by water pressure in the control chamber [1]. Upon release of pressure from the control chamber, the deluge valve opens.

Under NORMAL conditions, water pressure is supplied to the control chamber via the priming line [2] and strainer [3], and is then trapped in the control chamber by a check valve [4], restriction orifice [5], manual emergency release [6], and a relay valve (URV) [7] that is held in the supply position by pneumatic pressure supplied through a three-way solenoid valve [8]. The water pressure trapped in the control chamber of the deluge valve holds the diaphragm against the valve seat, sealing it drip-tight and keeping the system pipes dry.

Under FIRE conditions, water pressure is released from the control chamber, either with the manual emergency release, or by the URV switching to the release position. The URV switches position in response either to a decrease in pneumatic line pressure [E] or to the solenoid valve being activated by the fire & gas control system [C]. This opens the deluge valve. When the Magna latch solenoid is specified for FM approval: model 400Y- 6U with H2 suffix (see code designation on page 4), the deluge valve will latch open until reset remotely.

System P&ID

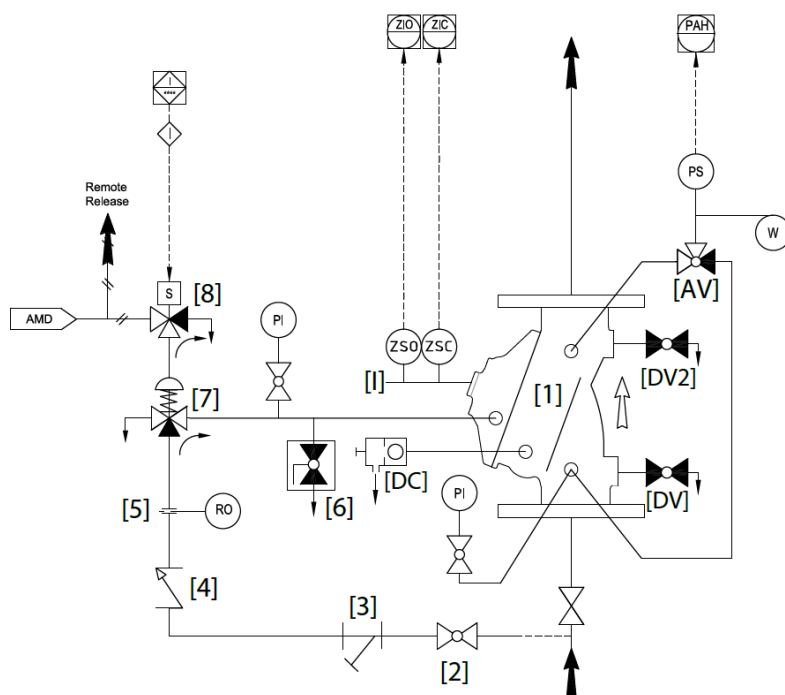

Components	
1	BERMAD 400Y Deluge Valve
2	Priming Ball Valve
3	Priming Strainer
4	Check Valve
5	Restriction Orifice
6	Manual Emergency Release
7	URV-3 Relay Valve
8	3-Way Solenoid Valve

Optional System Items	
PS	Pressure Switch
W	Water Motor Alarm
ZS	Limit Switch Assembly
AMD	Air Maintenance Device
I	Visual Valve Position indicator
DV2	Downstream Drain valve
DV	Drain Valve*
PI	Pressure Gauge*
AV	3-way Alarm Test Valve*
DC	Automatic Drip Check Valve*

* Included with suffix A in valve code and mandatory for FM approval (drain and indicating components) See code designations on page 4 "Factory Supplied Additional Items"

System Installation

A typical installation of the BERMAD model 400Y-6U features automatic actuation via a universal relay valve, triggered by a pneumatic fusible plug loop. It can also be triggered electrically by a signal from a fire & gas control system or an on-site emergency pushbutton.

When open and fitted with a limit switch the valve can send a feedback signal to a remote valve position monitoring system.

Optional System Items



Rotating Limit
Switch Box




Visual Position
Indicator



Pressure Gauge



Basket Strainer -
60F

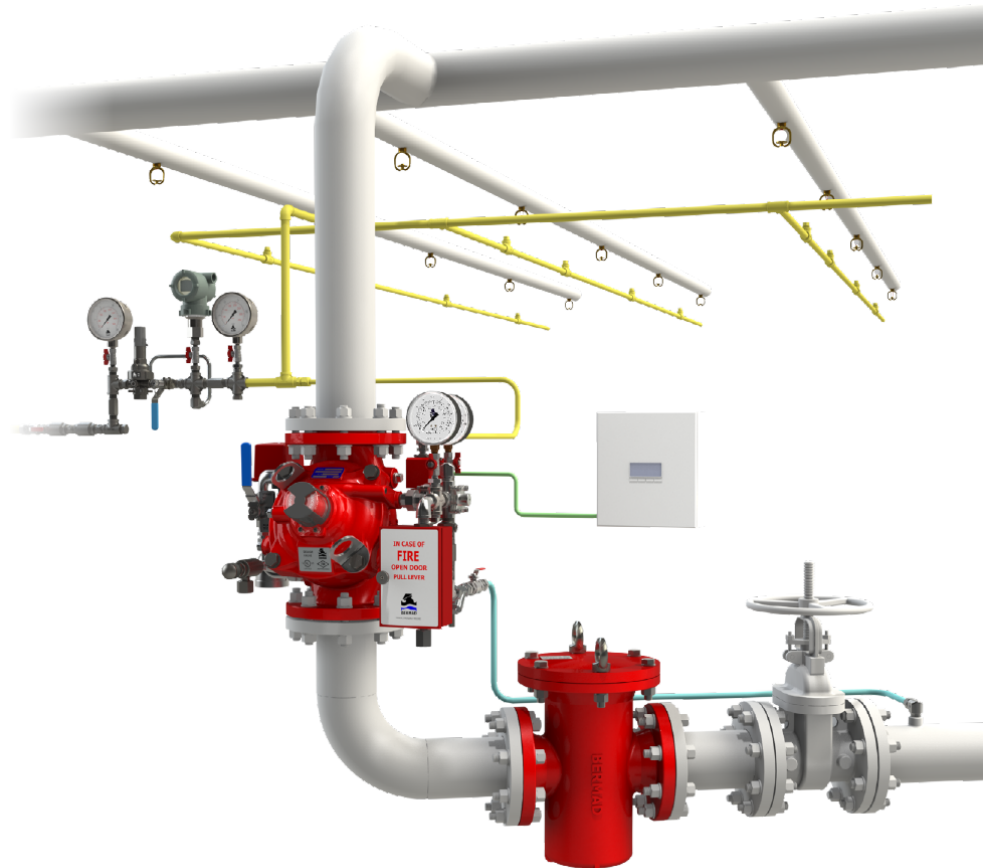

Suggested Specifications

The deluge valve shall be UL-listed and FM-approved, 365-psi/25-bar rated, with a straight-through Ytypebody.

The valve shall have an unobstructed flow path, with no stem guide or supporting ribs.

The deluge valve shall have no mechanical moving parts, and the actuation shall utilize a single-piece diaphragm assembly of VRSD technology.

The valve shall be coated internally and externally with UV protection. Optional: C5-VH grade of ISO-12944 standard against corrosive conditions.

The solenoid valve shall be a 3-way FM and UL429A-listed for 365 psi/25 bar with 65% of the rated voltage.

The control trim shall include an auxiliary relay valve, a manual emergency release unit, a Y-type strainer, two 4-inch pressure gauges, an automatic drip-check with manual override, and a ball drain valve with a 360 degree swivel.

A valve position indicator shall be provided, and equipped with two proximity limit switches.

Removing the valve cover for full inspection and maintenance shall be in-line and not require removal of the control trim.

The deluge valve and control trim shall be pre-assembled and hydraulically tested by a UL/FM and ISO 9000, 9001 certified factory.

Technical Data

Available Sizes:

Flanged- 1½, 2, 2½, 3, 4, 6, 8, 10, 12, 14 & 16"

Grooved- 1½, 2, 2½, 3, 4, 6, 8 & 10"

Pressure Rating:

ANSI#150 - 17.2 bar | 250 psi

ANSI#300 - 1½" to 10" - 25 bar | 365 psi



ANSI#300 - 12" to 16" - 20 bar | 300 psi

Grooved - 17.2 / 25 bar | 250 / 365 psi

Elastomer:

HTNR - Fabric Reinforced High Temperature

Compound - See engineering data

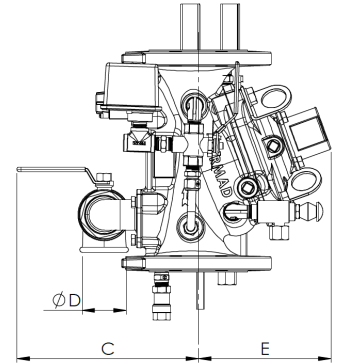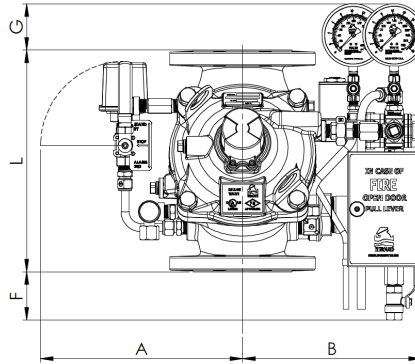

Valve Size	L #150 mm in	L Grooved mm in	L #300 mm in	A mm in	B mm in	C mm in	øD in	E mm in	F mm in	G mm in	Weight #150 kg lb	Weight #300 kg lb
DN40 1½"	230 9.1	230 9.1	230 9.1	279 11	221 8.7	241 9.5	¾"	120 4.7	119 4.6	98 3.9	22 49	25 55
DN50 2"	230 9.1	230 9.1	238 9.4	279 11	221 8.7	241 9.5	¾"	120 4.7	119 4.6	98 3.9	24 53	28 62
DN65 2½"	235 9.3	235 9.3	241 9.5	279 11	221 8.7	241 9.5	1½"	120 4.7	119 4.6	98 3.9	25 55	29 64
DN80 3"	310 12.2	310 12.2	326 12.8	339 13.4	279 11	274 10.8	1½"	146 5.7	49 1.9	88 3.5	38 84	43 95
DN100 4"	350 13.8	350 13.8	368 14.5	347 13.7	316 12.4	290 11.4	2"	158 6.2	22 0.9	75 3	48 106	55 121
DN150 6"	480 18.9	480 18.9	506 19.9	400 15.7	344 13.5	305 12	2"	228 25.4	-	27 1	92 202	112 246
DN200 8"	600 23.6	600 23.6	626 24.7	430 15.4	372 14.6	320 12.5	2"	-	-	-	155 340	175 385
DN250 10"	730 28.7	730 28.7	730 28.7	430 16.9	372 14.6	320 12.6	2"	295 11.6	-	-	185 407	221 486
DN300 12"	850 33.5	-	888 35	543 21.4	485 19	383 15	2"	441 17.4	-	-	328 721	368 810
DN350 14"	980 38.6	-	980 38.6	543 21.4	485 19.1	383 15.1	2"	441 17.4	-	-	361 794	433 953
DN400 16"	1100 43.3	-	1100 43.3	543 21.4	485 19	408 16	2"	415 16.3	-	-	407 895	527 1160

IMPORTANT: Dimensions for the trim envelope or extents refer to a vertical orientation and may vary with specific component positioning - Apart from the "L" dimension, allow a tolerance of at least ±15%

Valve Code Designations

FP	6"	400Y-6U	03	V	C	A5	ER	4DC	NN	N6nW																																																																																																																																			
<table><tr><th>Category</th><th>Code</th></tr><tr><td>Standard</td><td>FP</td></tr><tr><td>Seawater</td><td>FS</td></tr><tr><td>Foam</td><td>FC</td></tr></table>	Category	Code	Standard	FP	Seawater	FS	Foam	FC	<table><tr><th>Valve Size</th><th></th></tr><tr><td>1½"</td><td>40 mm</td></tr><tr><td>2"</td><td>50 mm</td></tr><tr><td>2½" ⁽⁶⁾</td><td>60 mm</td></tr><tr><td>3"</td><td>80 mm</td></tr><tr><td>4"</td><td>100 mm</td></tr><tr><td>6"</td><td>150 mm</td></tr><tr><td>8"</td><td>200 mm</td></tr><tr><td>10"</td><td>250 mm</td></tr><tr><td>12"</td><td>300 mm</td></tr><tr><td>14"</td><td>350 mm</td></tr><tr><td>16"</td><td>400 mm</td></tr></table>	Valve Size		1½"	40 mm	2"	50 mm	2½" ⁽⁶⁾	60 mm	3"	80 mm	4"	100 mm	6"	150 mm	8"	200 mm	10"	250 mm	12"	300 mm	14"	350 mm	16"	400 mm	<table><tr><th>Installation</th><th>Code</th></tr><tr><td>Vertical</td><td>V</td></tr><tr><td>Horizontal</td><td>H</td></tr></table>	Installation	Code	Vertical	V	Horizontal	H	<table><tr><th>Material Body & Cover ⁽¹⁾</th><th>Code</th></tr><tr><td>Ductile Iron A356 ⁽²⁾</td><td>C</td></tr><tr><td>Steel ASTM A216 WCB ⁽²⁾</td><td>S</td></tr><tr><td>Stainless Steel 316</td><td>N</td></tr><tr><td>Nickel Al Bronze C95800</td><td>U</td></tr><tr><td>Super Duplex Grade 5A</td><td>D</td></tr></table>	Material Body & Cover ⁽¹⁾	Code	Ductile Iron A356 ⁽²⁾	C	Steel ASTM A216 WCB ⁽²⁾	S	Stainless Steel 316	N	Nickel Al Bronze C95800	U	Super Duplex Grade 5A	D	<table><tr><th>Coating</th><th>Code</th></tr><tr><td>High Build Epoxy</td><td>ER</td></tr><tr><td>Zinc Based High Build Epoxy ⁽⁵⁾</td><td>ZR</td></tr><tr><td>Uncoated</td><td>UC</td></tr></table>	Coating	Code	High Build Epoxy	ER	Zinc Based High Build Epoxy ⁽⁵⁾	ZR	Uncoated	UC	<table><tr><th>Voltage - Main Valve N.O or N.C *</th><th>Code</th></tr><tr><td>24VDC - N.C.</td><td>4DC</td></tr><tr><td>24VDC - N.O.</td><td>4DO</td></tr><tr><td>24VDC - Magna Latch</td><td>4DS</td></tr><tr><td>110VDC - N.C.</td><td>5DC</td></tr><tr><td>110VDC - N.O.</td><td>5DO</td></tr><tr><td>110 - 120/AC - N.C.</td><td>5AC</td></tr><tr><td>110 - 120/AC - N.C.</td><td>5AO</td></tr><tr><td>220 - 240/AC - N.C.</td><td>2AC</td></tr><tr><td>221 - 240/AC - N.C.</td><td>2AO</td></tr></table>	Voltage - Main Valve N.O or N.C *	Code	24VDC - N.C.	4DC	24VDC - N.O.	4DO	24VDC - Magna Latch	4DS	110VDC - N.C.	5DC	110VDC - N.O.	5DO	110 - 120/AC - N.C.	5AC	110 - 120/AC - N.C.	5AO	220 - 240/AC - N.C.	2AC	221 - 240/AC - N.C.	2AO	<table><tr><th>Factory Supplied Additional Items</th><th>Code</th></tr><tr><td>General Purpose NEMA-4 Pressure Switch</td><td>P</td></tr><tr><td>Ex Proof NEC, Div.1 Pressure Switch ⁽³⁾</td><td>P7</td></tr><tr><td>Ex d ATEX Pressure Switch ⁽³⁾</td><td>P9</td></tr><tr><td>Ex d Pressure Switch, SS316 Enclosure ⁽³⁾</td><td>P9Jn</td></tr><tr><td>Ex d Pressure Switch, SS316 Enclosure, Monel Sensor ⁽³⁾</td><td>P9mJn</td></tr><tr><td>Single Limit Switch, General Purpose</td><td>S</td></tr><tr><td>Single Ex d Proximity limit Switch</td><td>S9</td></tr><tr><td>Double Ex d Proximity Limit Switch</td><td>SS9</td></tr><tr><td>Double Ex d Proximity Limit Switch with SS316 Junction Box</td><td>SS9Jn</td></tr><tr><td>Pressure Gauge Assembly ⁽³⁾</td><td>6</td></tr><tr><td>S.S Glycerin Pressure Gauge Assembly ⁽³⁾</td><td>6n</td></tr><tr><td>Monel Pressure Gauge Assembly ⁽³⁾</td><td>6m</td></tr><tr><td>Ex Proof NEC Class 1 Div 1 Solenoid</td><td>7</td></tr><tr><td>Ex. d Atex Solenoid</td><td>9</td></tr><tr><td>Magna Latch Solenoid</td><td>H2</td></tr><tr><td>Drain Valve</td><td>DV</td></tr><tr><td>Water Motor Alarm Assembly ⁽³⁾</td><td>W</td></tr><tr><td>Large Control Filter</td><td>F</td></tr><tr><td>Valve Position Indicator</td><td>I</td></tr><tr><td>S.S 316 Trim Accessories</td><td>N</td></tr><tr><td>S.S Solenoid Valve</td><td>K</td></tr><tr><td>Pressure Transmitter ⁽³⁾</td><td>Q</td></tr><tr><td>Drain and Indicating Components</td><td>A</td></tr></table>	Factory Supplied Additional Items	Code	General Purpose NEMA-4 Pressure Switch	P	Ex Proof NEC, Div.1 Pressure Switch ⁽³⁾	P7	Ex d ATEX Pressure Switch ⁽³⁾	P9	Ex d Pressure Switch, SS316 Enclosure ⁽³⁾	P9Jn	Ex d Pressure Switch, SS316 Enclosure, Monel Sensor ⁽³⁾	P9mJn	Single Limit Switch, General Purpose	S	Single Ex d Proximity limit Switch	S9	Double Ex d Proximity Limit Switch	SS9	Double Ex d Proximity Limit Switch with SS316 Junction Box	SS9Jn	Pressure Gauge Assembly ⁽³⁾	6	S.S Glycerin Pressure Gauge Assembly ⁽³⁾	6n	Monel Pressure Gauge Assembly ⁽³⁾	6m	Ex Proof NEC Class 1 Div 1 Solenoid	7	Ex. d Atex Solenoid	9	Magna Latch Solenoid	H2	Drain Valve	DV	Water Motor Alarm Assembly ⁽³⁾	W	Large Control Filter	F	Valve Position Indicator	I	S.S 316 Trim Accessories	N	S.S Solenoid Valve	K	Pressure Transmitter ⁽³⁾	Q	Drain and Indicating Components	A	<table><tr><th>Tubing & Fittings</th><th>Code</th></tr><tr><td>Stainless Steel 316</td><td>NN</td></tr><tr><td>Monel 400</td><td>MM</td></tr><tr><td>Super Duplex</td><td>DD</td></tr></table>	Tubing & Fittings	Code	Stainless Steel 316	NN	Monel 400	MM	Super Duplex	DD
Category	Code																																																																																																																																												
Standard	FP																																																																																																																																												
Seawater	FS																																																																																																																																												
Foam	FC																																																																																																																																												
Valve Size																																																																																																																																													
1½"	40 mm																																																																																																																																												
2"	50 mm																																																																																																																																												
2½" ⁽⁶⁾	60 mm																																																																																																																																												
3"	80 mm																																																																																																																																												
4"	100 mm																																																																																																																																												
6"	150 mm																																																																																																																																												
8"	200 mm																																																																																																																																												
10"	250 mm																																																																																																																																												
12"	300 mm																																																																																																																																												
14"	350 mm																																																																																																																																												
16"	400 mm																																																																																																																																												
Installation	Code																																																																																																																																												
Vertical	V																																																																																																																																												
Horizontal	H																																																																																																																																												
Material Body & Cover ⁽¹⁾	Code																																																																																																																																												
Ductile Iron A356 ⁽²⁾	C																																																																																																																																												
Steel ASTM A216 WCB ⁽²⁾	S																																																																																																																																												
Stainless Steel 316	N																																																																																																																																												
Nickel Al Bronze C95800	U																																																																																																																																												
Super Duplex Grade 5A	D																																																																																																																																												
Coating	Code																																																																																																																																												
High Build Epoxy	ER																																																																																																																																												
Zinc Based High Build Epoxy ⁽⁵⁾	ZR																																																																																																																																												
Uncoated	UC																																																																																																																																												
Voltage - Main Valve N.O or N.C *	Code																																																																																																																																												
24VDC - N.C.	4DC																																																																																																																																												
24VDC - N.O.	4DO																																																																																																																																												
24VDC - Magna Latch	4DS																																																																																																																																												
110VDC - N.C.	5DC																																																																																																																																												
110VDC - N.O.	5DO																																																																																																																																												
110 - 120/AC - N.C.	5AC																																																																																																																																												
110 - 120/AC - N.C.	5AO																																																																																																																																												
220 - 240/AC - N.C.	2AC																																																																																																																																												
221 - 240/AC - N.C.	2AO																																																																																																																																												
Factory Supplied Additional Items	Code																																																																																																																																												
General Purpose NEMA-4 Pressure Switch	P																																																																																																																																												
Ex Proof NEC, Div.1 Pressure Switch ⁽³⁾	P7																																																																																																																																												
Ex d ATEX Pressure Switch ⁽³⁾	P9																																																																																																																																												
Ex d Pressure Switch, SS316 Enclosure ⁽³⁾	P9Jn																																																																																																																																												
Ex d Pressure Switch, SS316 Enclosure, Monel Sensor ⁽³⁾	P9mJn																																																																																																																																												
Single Limit Switch, General Purpose	S																																																																																																																																												
Single Ex d Proximity limit Switch	S9																																																																																																																																												
Double Ex d Proximity Limit Switch	SS9																																																																																																																																												
Double Ex d Proximity Limit Switch with SS316 Junction Box	SS9Jn																																																																																																																																												
Pressure Gauge Assembly ⁽³⁾	6																																																																																																																																												
S.S Glycerin Pressure Gauge Assembly ⁽³⁾	6n																																																																																																																																												
Monel Pressure Gauge Assembly ⁽³⁾	6m																																																																																																																																												
Ex Proof NEC Class 1 Div 1 Solenoid	7																																																																																																																																												
Ex. d Atex Solenoid	9																																																																																																																																												
Magna Latch Solenoid	H2																																																																																																																																												
Drain Valve	DV																																																																																																																																												
Water Motor Alarm Assembly ⁽³⁾	W																																																																																																																																												
Large Control Filter	F																																																																																																																																												
Valve Position Indicator	I																																																																																																																																												
S.S 316 Trim Accessories	N																																																																																																																																												
S.S Solenoid Valve	K																																																																																																																																												
Pressure Transmitter ⁽³⁾	Q																																																																																																																																												
Drain and Indicating Components	A																																																																																																																																												
Tubing & Fittings	Code																																																																																																																																												
Stainless Steel 316	NN																																																																																																																																												
Monel 400	MM																																																																																																																																												
Super Duplex	DD																																																																																																																																												
		<table><tr><th>End Connections</th><th>Code</th></tr><tr><td>ANSI#150RF</td><td>A5</td></tr><tr><td>ANSI#150FF</td><td>a5</td></tr><tr><td>ANSI#300RF</td><td>A3</td></tr><tr><td>ANSI#300FF</td><td>a3</td></tr><tr><td>ISO PN16</td><td>16</td></tr><tr><td>ISO PN25</td><td>25</td></tr><tr><td>Grooved Class 250psi / 17.2bar</td><td>V1</td></tr><tr><td>Grooved Class 365psi / 25bar</td><td>V2</td></tr></table>	End Connections	Code	ANSI#150RF	A5	ANSI#150FF	a5	ANSI#300RF	A3	ANSI#300FF	a3	ISO PN16	16	ISO PN25	25	Grooved Class 250psi / 17.2bar	V1	Grooved Class 365psi / 25bar	V2																																																																																																																									
End Connections	Code																																																																																																																																												
ANSI#150RF	A5																																																																																																																																												
ANSI#150FF	a5																																																																																																																																												
ANSI#300RF	A3																																																																																																																																												
ANSI#300FF	a3																																																																																																																																												
ISO PN16	16																																																																																																																																												
ISO PN25	25																																																																																																																																												
Grooved Class 250psi / 17.2bar	V1																																																																																																																																												
Grooved Class 365psi / 25bar	V2																																																																																																																																												
		<table><tr><th>Additional Feature</th><th>Code</th></tr><tr><td>Closing Speed Control</td><td>01</td></tr><tr><td>Opening Speed Control</td><td>02</td></tr><tr><td>Opening & Closing Speed Control</td><td>03</td></tr><tr><td>None</td><td>-</td></tr></table>	Additional Feature	Code	Closing Speed Control	01	Opening Speed Control	02	Opening & Closing Speed Control	03	None	-																																																																																																																																	
Additional Feature	Code																																																																																																																																												
Closing Speed Control	01																																																																																																																																												
Opening Speed Control	02																																																																																																																																												
Opening & Closing Speed Control	03																																																																																																																																												
None	-																																																																																																																																												

Notes:

(1) Other materials available see engineering data

(2) Coated internally and externally

(3) Supplied loose

(4) Consult BERMAD for availability

(5) For valves up to and including 10"

(6) Available in Ductile Iron Only

* NO or NC refers to the main valve status when the Solenoid is de-energized

*More options available – consult BERMAD

Notes:

- (1) Other materials available see engineering data
- (2) Coated internally and externally
- (3) Supplied loose
- (4) Consult BERMAD for availability
- (5) For valves up to and including 10"
- (6) Available in Ductile Iron Only

*More options available – consult BERMAD