

PRESSURE SUSTAINING VALVE - DOUBLE CHAMBER

Model IR-130-DC-3W-XZ

The BERMAD Model IR-130-DC-3W-XZ Pressure Sustaining Valve is a double chambered, hydraulically operated, diaphragm actuated control valve that sustains minimum preset upstream (back) pressure and opens fully when line pressure is in excess of setting. The Double Chamber Valve is a high performance valve, specially designed for quick response and challenging regulation requirements.



[1] BERMAD Model IR-130-DC-3W-XZ sustains supply system pressure to prioritize uphill plots and prevent system emptying.

[2] Solenoid Control Valves Model IR-21T

[3] Combination Air Valve Model IR-C10

[4] Kinetic Air Valve Model IR-K10

[5] RTU-Remote Terminal Unit

Features & Benefits


- Line Pressure Driven, Hydraulically Controlled
 - Prioritizes pressure zones
 - Controls system fill-up
 - Opens fully upon line pressure rise
- Double Chamber Design
 - Full powered opening and closing
 - Decreased pressure loss
 - Low throttling noise
 - Non-slam closing characteristic
 - Protected diaphragm
- Engineered Composite Valve with Industrial Grade Design
- hYflow 'Y' Valve Body with "Look Through" Design
 - Ultra-high flow capacity at low pressure loss
- User-Friendly Design
 - Simple in-line inspection and service


Typical Applications

- Line Fill-Up Control Solutions
- Line Emptying Prevention
- Systems Subject to Varying Supply Pressure
- Infield Filters Backwash Pressure Sustaining
- Energy Saving Irrigation Systems

Operation:

The Pressure Sustaining Pilot **[1]** commands the main valve to throttle closed should Upstream Pressure **[P1]** drop below setting, and to open fully when **[P1]** rises above setting. The Manual Selector **[2]** enables local manual closing.





Technical Data

Pressure Rating:

10 bar

Operating Pressure Range:

0.5-10 bar

Materials

Body & Cover:

Polyamide 6 & 30% GF

Diaphragm:

NR, Nylon fabric reinforced

Spring:

Stainless Steel

Control Loop Accessories

PS Pilot: PC-SHARP-X-P

Pilot Spring Range:

Spring	Spring Color	Setting range
J	Green	0.2-1.7 bar
K	Gray	0.5-3.0 bar
N	Natural	0.8-6.5 bar
V	Blue & White	1.0-10.0 bar

Standard spring - marked in bold


Tubing and Fittings:

Polyethylene and Polypropylene

*For other pilots please consult [BERMAD](http://www.bermad.com)

Technical Specifications

For other patterns and end connection types, Please refer to [BERMAD](http://www.bermad.com) full engineering page.

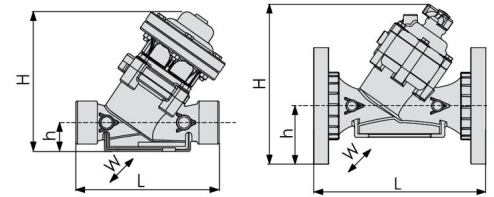


Size	Pattern	End Connection	Weight (Kg)	L (mm)	H (mm)	h (mm)	W	CCDV (Lit)	KV
1½" ; DN40	"Y" (globe)	Threaded	1.7	200	194	40	126	0.13	50
2" ; DN50	"Y" (globe)	Threaded	1.7	230	196	40	126	0.13	50
2"L ; DN50L	"Y" (globe)	Threaded	2.2	230	220	43	135	0.17	100
2½" ; DN50L	"Y" (globe)	Threaded	2.2	230	220	43	135	0.17	100
3" ; DN80	"Y" (globe)	Threaded	2.3	298	232	55	135	0.17	100
3" ; DN80	"Y" (globe)	Plastic Flanges	3.2	308	277	100	200	0.17	100
3" ; DN80	"Y" (globe)	Metal Flanges	5.1	308	277	100	200	0.17	100
3"L ; DN80L	"Y" (globe)	Threaded	6	338	356	60	210	0.55	200
3"L ; DN80L	"Y" (globe)	Plastic Flanges	6.5	343	395	100	210	0.55	200
3"L ; DN80L	"Y" (globe)	Metal Flanges	7.4	343	395	100	210	0.55	200
4" ; DN100	"Y" (globe)	Plastic Flanges	7.6	364	407	112	224	0.55	200
4" ; DN100	"Y" (globe)	Metal Flanges	9.5	364	407	112	224	0.55	200

CCDV = Control Chamber Displacement Volume • **Threaded** = BSP & NPT are available. External thread is available for 2" and 2½" only. • Other End Connections are available on request. For dimensions and weights of adapters or valves with adapters please consult with customer service.

Additional Features

Code	Description	Size Range
K/L	Auxiliary Closing / Lifting Spring (for 100-DC models only)	1½"-4" / DN40-100
5	Plastic Test Point	1½"-4" / DN40-100

Flow Chart

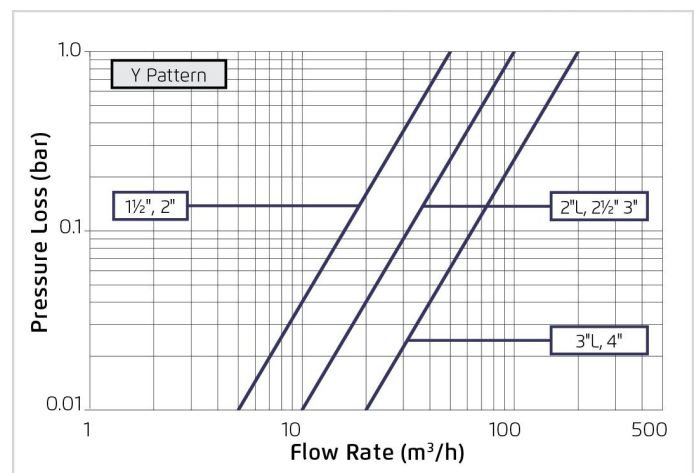

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{K_v} \right)^2$$

Kv = m³/h @ ΔP of 1 bar

Q = m³/h

ΔP = bar