


# QUICK PRESSURE RELIEF VALVE - DOUBLE CHAMBER

## Model IR-130Q-DC-2W

The BERMAD Model IR-130Q-DC-2W is a double chambered, hydraulically operated, diaphragm actuated control valve designed to relieve excessive line pressure when it rises above the preset maximum. It responds to rises in system pressure immediately, accurately and with high repeatability, by opening fully. The BERMAD Model IR-130Q-DC provides smooth drip tight closing. The Double Chamber Valve is a high performance valve, specially designed for quick response and challenging regulation requirements.

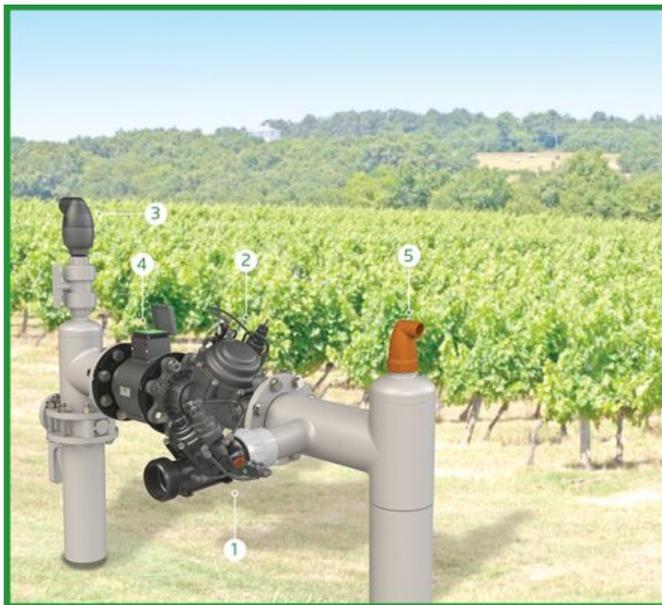

- [1] BERMAD Model IR-130Q-DC-2W protects system from pressure spikes.
- [2] Pressure Reducing Valve Model IR-120-55-X
- [3] Combination Air Valve Model IR-C10
- [4] Electromagnetic Flow Meter
- [5] Kinetic Air Valve Model IR-K10

### Features & Benefits


- Hydraulic Control Valve
  - Line pressure driven
  - Short response time
  - Long term drip tight sealing
- Engineered Composite Valve with Industrial Grade Design
  - Adaptable on-site to a wide range of end connection
  - Highly durable, chemical and cavitation resistant
- hYflow 'Y' Valve Body with "Look Through" Design
  - Ultra-high flow capacity at low pressure loss
- Double Chamber Design
  - Full powered opening and closing
  - Decreased pressure loss
  - Low throttling noise
  - Non-slam closing characteristic
  - Protected diaphragm
- User-Friendly Design
  - Simple in-line inspection and service


### Typical Applications

- System Burst Protection
- Momentary Pressure Peak Elimination
- System Failure Visual Indication
- Filter Burst Protection

### Operation:

The Pressure Relief Pilot [1] commands the valve to open immediately should the upstream pressure [P1] abruptly rise above pilot setting, and to close smoothly when it falls below pilot setting, sealing drip tight. The Cock Valve [2] enables manual operating test.

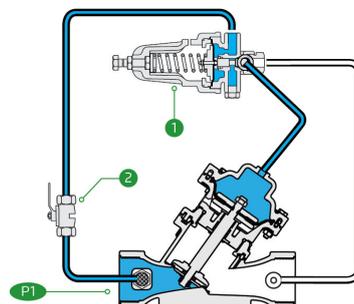



Technical Data

**Pressure Rating:**  
10 bar

**Operating Pressure Range:**  
0.5-10 bar

**Materials**

**Body & Cover:**  
Polyamide 6 & 30% GF

**Diaphragm:**  
NR, Nylon fabric reinforced

**Spring:**  
Stainless Steel

**Control Loop Accessories**

**PS Pilot:** PC-3Q-A-P

**Pilot Spring Range:**


| Spring | Spring Color | Setting range |
|--------|--------------|---------------|
| V      | Blue & White | 1.0-10.0 bar  |

**Tubing and Fittings:**

Polyethylene and Polypropylene

Technical Specifications


For other patterns and end connection types, Please refer to [BERMAD](#) full engineering page.

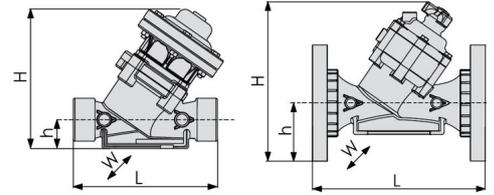

| Size        | Pattern     | End Connection  | Weight (Kg) | L (mm) | H (mm) | h (mm) | w   | CCDV (Lit) | KV  |
|-------------|-------------|-----------------|-------------|--------|--------|--------|-----|------------|-----|
| 1½" ; DN40  | "Y" (globe) | Threaded        | 1.7         | 200    | 194    | 40     | 126 | 0.13       | 50  |
| 2" ; DN50   | "Y" (globe) | Threaded        | 1.7         | 230    | 196    | 40     | 126 | 0.13       | 50  |
| 2"L ; DN50L | "Y" (globe) | Threaded        | 2.2         | 230    | 220    | 43     | 135 | 0.17       | 100 |
| 2½" ; DN50L | "Y" (globe) | Threaded        | 2.2         | 230    | 220    | 43     | 135 | 0.17       | 100 |
| 3" ; DN80   | "Y" (globe) | Threaded        | 2.3         | 298    | 232    | 55     | 135 | 0.17       | 100 |
| 3" ; DN80   | "Y" (globe) | Plastic Flanges | 3.2         | 308    | 277    | 100    | 200 | 0.17       | 100 |
| 3" ; DN80   | "Y" (globe) | Metal Flanges   | 5.1         | 308    | 277    | 100    | 200 | 0.17       | 100 |
| 3"L ; DN80L | "Y" (globe) | Threaded        | 6           | 338    | 356    | 60     | 210 | 0.55       | 200 |
| 3"L ; DN80L | "Y" (globe) | Plastic Flanges | 6.5         | 343    | 395    | 100    | 210 | 0.55       | 200 |
| 3"L ; DN80L | "Y" (globe) | Metal Flanges   | 7.4         | 343    | 395    | 100    | 210 | 0.55       | 200 |
| 4" ; DN100  | "Y" (globe) | Plastic Flanges | 7.6         | 364    | 407    | 112    | 224 | 0.55       | 200 |
| 4" ; DN100  | "Y" (globe) | Metal Flanges   | 9.5         | 364    | 407    | 112    | 224 | 0.55       | 200 |

CCDV = Control Chamber Displacement Volume • **Threaded** = BSP & NPT are available. External thread is available for 2" and 2½" only. • Other End Connections are available on request. For dimensions and weights of adapters or valves with adapters please consult with customer service.

Flow Chart

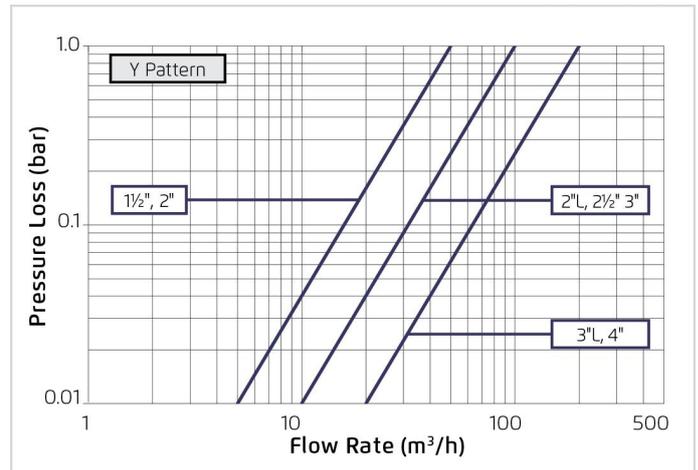

2-Way circuit "Added Head Loss" (for "V" below 2 m/s): 0.3 bar

Differential Pressure & Flow Calculation

$$\Delta P = \left( \frac{Q}{Kv} \right)^2$$

$Kv = m^3/h @ \Delta P \text{ of } 1 \text{ bar}$   
 $Q = m^3/h$   
 $\Delta P = \text{bar}$