



PRESSURE REDUCING & SUSTAINING VALVE

Model IR-123-55-3W-X

The BERMAD Model IR-123-55-3W-X is a hydraulically operated, diaphragm actuated control valve that sustains minimum preset upstream (back) pressure and reduces downstream pressure to a constant preset maximum. It either opens or shuts in response to an electric signal.



- [1] BERMAD Model IR-123-55-3W-X opens in response to electric signal, sustains supply pressure, controls laterals and distribution line fill-up, and reduces their operating pressure.
- [2] Electromagnetic Flow Meter
- [3] Combination Air Valve Model IR-C10
- [4] Smart Irrigation Controller-OMEGA
- [5] Hydraulic Control Valve Model IR-105-Z
- [6] Kinetic Air Valve Model IR-K10

Features & Benefits


- Line Pressure Driven, Electrically Controlled On/Off
 - Protects downstream systems
 - Prioritizes pressure zones
 - Controls system fill-up
 - Sustains upstream line pressure
- Engineered Composite Valve with Industrial Grade Design
 - Highly durable, chemical and cavitation resistant
 - No internal bolts and nuts
- hYflow 'Y' Valve Body with "Look Through" Design
 - Ultra-high flow capacity at low pressure loss
- Unitized "Flexible Super Travel" (FST) Diaphragm and Guided Plug
 - Accurate and stable regulation with smooth closing
 - Requires low opening and actuation pressure
 - Prevents diaphragm erosion and distortion
- User-Friendly Design
 - Easy pressure setting
 - Simple in-line inspection and service

Typical Applications

- Automated Irrigation Systems
- Line Fill-Up Control Solutions
- Pressure Reducing Systems
- Remote and/or Elevated Plots
- Infield Filters Backwash Pressure Sustaining
- Energy Saving Irrigation Systems

Operation:

The Pressure Reducing Pilot (PRP) [1] is hydraulically connected to the Valve Control Chamber [2] through the Pressure Sustaining Pilot (PSP) [3] and the Shuttle Valve [4]. The PSP commands the valve to throttle closed should Upstream Pressure [P1] drop below setting. When [P1] rises above setting, the PSP switches and allows the PRP to control the valve, commanding it to reduce Downstream Pressure [P2]. In response to an electric signal, the Solenoid [5] switches and pressurizes the shuttle valve, which then blocks the pilots and transmits the line pressure into the control chamber, shutting the valve.

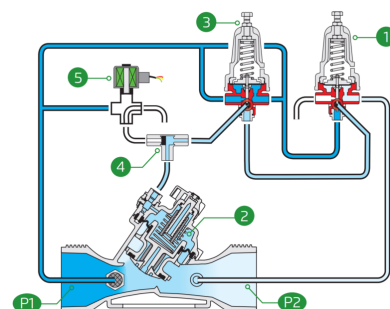



Technical Data

Pressure Rating:

10 bar

Operating Pressure Range:

0.5-10 bar

Materials

Body & Cover:

Polyamide 6 & 30% GF

Diaphragm:

NR, Nylon fabric reinforced

Spring:

Stainless Steel

Control Loop Accessories

PR Pilot: PC-SHARP-X-P

PS Pilot: PC-SHARP-X-P

Pilot Spring Range:

Spring	Spring Color	Setting range
J	Green	0.2-1.7 bar
K	Gray	0.5-3.0 bar
N	Natural	0.8-6.5 bar
V	Blue & White	1.0-10.0 bar

Standard spring - marked in bold

Tubing and Fittings:

Polyethylene and Polypropylene


DC latch solenoid:

S-982-3W P.B.

*For other solenoids please consult [BERMAD](#)

Technical Specifications

For other patterns and end connection types, Please refer to [BERMAD](#) full engineering page.

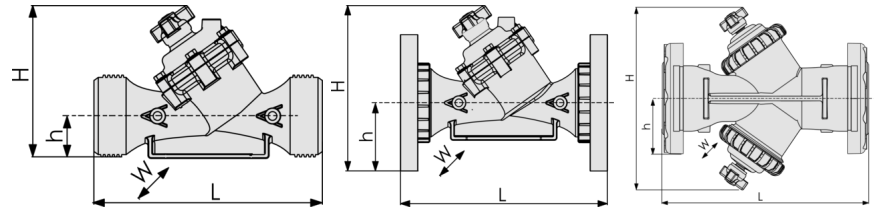


Size	Pattern	End Connection	Weight (Kg)	L (mm)	H (mm)	h (mm)	W	CCDV (Lit)	KV
1½" ; DN40	Oblique	Threaded	1.1	200	173	40	97	0.12	50
2" ; DN50	Oblique	Threaded	1.2	230	173	40	97	0.12	50
2"L ; DN50L	Oblique	Threaded	1.5	230	187	43	135	0.15	100
2½" ; DN65	Oblique	Threaded	1.5	230	187	43	135	0.15	100
3" ; DN80	Oblique	Threaded	1.6	298	199	55	135	0.15	100
3" ; DN80	Oblique	Plastic Flanges	2.5	308	244	100	200	0.15	100
3" ; DN80	Oblique	Metal Flanges	4.4	308	244	100	200	0.15	100
3"L ; DN80L	Oblique	Threaded	3	298	278	60	168	0.62	200
3"L ; DN80L	Oblique	Plastic Flanges	3.7	308	317	100	200	0.62	200
3"L ; DN80L	Oblique	Metal Flanges	4.6	308	317	100	200	0.62	200
4" ; DN100	Oblique	Plastic Flanges	4.6	350	329	112	224	0.62	200
4" ; DN100	Oblique	Metal Flanges	7.4	350	329	112	224	0.62	200
4"L ; DN100L	Oblique	Plastic Flanges	9.2	442	340	112	226	1.15	340
4"L ; DN100L	Oblique	Metal Flanges	11.2	442	340	112	226	1.15	340
6"R ; DN150R	Oblique	Metal Flanges	16.5	470	377	149	287	1.15	340
6" ; DN150	Boxer	Grooved	11	480	387	100	475	2x0.62	400
6" ; DN150	Boxer	Plastic Flanges	12.5	504	387	143	475	2x0.62	400

CCDV = Control Chamber Displacement Volume • **Threaded** = BSP & NPT are available. External thread is available for 2" and 2½" only. • Other End Connections are available on request. For dimensions and weights of adapters or valves with adapters please consult with customer service.

Additional Features

Code	Description	Size Range
M	Flow Stem (*Exclude sizes 4"L, 6"R)	1½"-6" / DN40-150
S	Plastic Test Point	1½"-4" / DN40-100
Z	Manual Selector	1½"-4"L / DN40-100L
V3	Victaulic PVC Adaptors 3"	3" / DN80
V4	Victaulic PVC Adaptors 4"	4" / DN100

Flow Chart

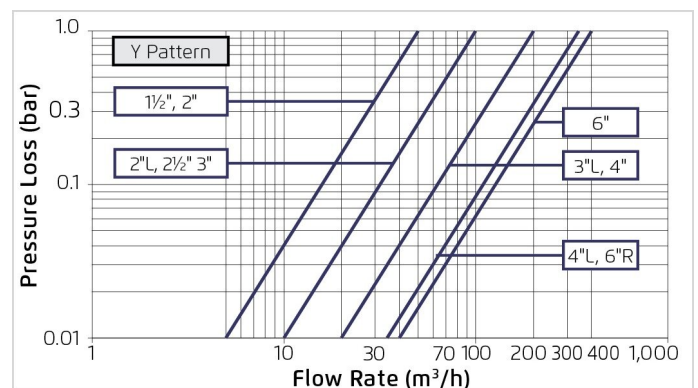

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{K_v} \right)^2$$

$K_v = m^3/h$ @ ΔP of 1 bar

$Q = m^3/h$

$\Delta P = \text{bar}$