



PRESSURE REDUCING & SUSTAINING VALVE

Model IR-123-3W-XZ

The BERMAD Model IR-123-3W-XZ is a hydraulically operated, diaphragm actuated control valve that sustains minimum preset upstream (back) pressure and reduces downstream pressure to a constant preset maximum.



- [1] BERMAD Model IR-123-3W-XZ sustains supply system pressure, and establishes reduced higher pressure zone.
- [2] Electromagnetic Flow Meter
- [3] Combination Air Valve Model IR-C10
- [4] Filter Backwash Hydraulic Valve Model IR-350
- [5] Hydraulic Control Valve Model IR-105-Z
- [6] Kinetic Air Valve Model IR-K10

Features & Benefits


- Line Pressure Drive, Hydraulically Controlled
 - Protects downstream systems
 - Prioritizes pressure zones
 - Controls system fill-up
- Engineered Composite Valve with Industrial Grade Design
 - Highly durable, chemical and cavitation resistant
 - No internal bolts and nuts
- hYflow 'Y' Valve Body with "Look Through" Design
 - Ultra-high flow capacity at low pressure loss
- Unitized "Flexible Super Travel" (FST) Diaphragm and Guided Plug
 - Accurate and stable regulation with smooth closing
 - Requires low opening and actuation pressure
 - Prevents diaphragm erosion and distortion
- User-Friendly Design
 - Easy pressure setting
 - Simple in-line inspection and service

Typical Applications

- Line Fill-Up Control Solutions
- Line Emptying Prevention
- Pressure Reducing Systems
- Infield Filters Backwash Pressure Sustaining
- Energy Saving Irrigation Systems

Operation:

The Pressure Reducing Pilot (PRP) [1] is hydraulically connected to the Valve Control Chamber [2] through the Pressure Sustaining Pilot (PSP) [3]. The PSP commands the Valve to throttle closed should Upstream Pressure [P1] drop below setting. When [P1] rises above setting, the PSP switches and allows the PRP to control the Valve, commanding it to reduce Downstream Pressure [P2]. The Manual Selector [4] enables local manual closing.

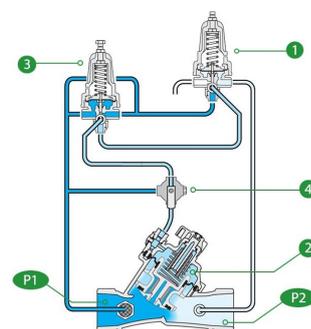



Technical Data

Pressure Rating:
150 psi

Operating Pressure Range:
7-150 psi

Materials

Body & Cover:
Polyamide 6 & 30% GF

Diaphragm:
NR, Nylon fabric reinforced

Spring:
Stainless Steel

Control Loop Accessories

PR Pilot: PC-SHARP-X-P

PS Pilot: PC-SHARP-X-P

Pilot Spring Range:

Spring	Spring Color	Setting range
J	Green	3-25 psi
K	Gray	7-43 psi
N	Natural	12-95 psi
V	Blue & White	15-150 psi


Standard spring - marked in bold

Tubing and Fittings:

Polyethylene and Polypropylene

Technical Specifications

For other patterns and end connection types, Please refer to [BERMAD](#) full engineering page.

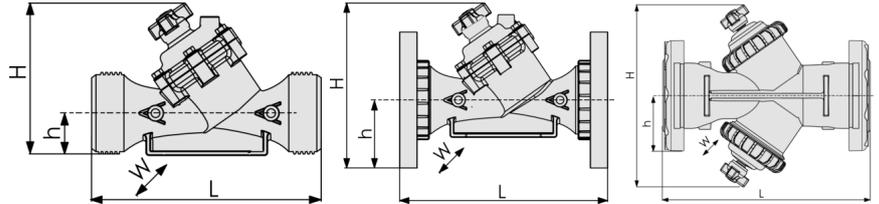


Size	Pattern	End Connection	Weight (Lb)	L (In)	H (In)	h (In)	w	CCDV (Gal)	CV
1½" ; DN40	Oblique	Threaded	2.4	7¾	6¾	1¾	3¾	0.026	58
2" ; DN50	Oblique	Threaded	2.7	9¾	6¾	1¾	3¾	0.026	58
2"L ; DN50L	Oblique	Threaded	3	9¾	7¾	1¾	5¾	0.033	116
2½" ; DN65	Oblique	Threaded	3	9¾	7¾	1¾	5¾	0.033	116
3" ; DN80	Oblique	Threaded	4	11¾	7¾	2¼	5¾	0.033	116
3" ; DN80	Oblique	Plastic Flanges	6	12¾	9¾	4	7¾	0.033	116
3" ; DN80	Oblique	Metal Flanges	10	12¾	9¾	4	7¾	0.033	116
3"L ; DN80L	Oblique	Threaded	7	11¾	9¾	2¾	6¾	0.136	231
3"L ; DN80L	Oblique	Plastic Flanges	8.2	12¾	12½	4	7¾	0.136	231
3"L ; DN80L	Oblique	Metal Flanges	10.1	12¾	12½	4	7¾	0.136	231
4" ; DN100	Oblique	Plastic Flanges	10	13¾	13	4½	8¾	0.136	231
4" ; DN100	Oblique	Metal Flanges	16.3	13¾	13	4½	8¾	0.136	231
4"L ; DN100L	Oblique	Plastic Flanges	20.2	17½	13¾	4½	9	0.253	393
4"L ; DN100L	Oblique	Metal Flanges	24.7	17½	13¾	4½	9	0.253	393
6"R ; DN150R	Oblique	Metal Flanges	36	18½	14¾	5¾	11¾	0.253	393
6" ; DN150	Boxer	Grooved	26	19	15¾	4	18¾	2x0.136	462
6" ; DN150	Boxer	Plastic Flanges	27.6	19¾	15¾	5¾	18¾	2x0.136	462

CCDV = Control Chamber Displacement Volume • **Threaded** = BSP & NPT are available. External thread is available for 2" and 2½" only. • Other End Connections are available on request. For dimensions and weights of adapters or valves with adapters please consult with customer service.

Additional Features

Code	Description	Size Range
M	Flow Stem (*Exclude sizes 4"L, 6"R)	1½"-6"
Z	Manual Selector	1½"-4"L
V3	Victaulic PVC Adaptors 3"	3"
V4	Victaulic PVC Adaptors 4"	4"

Flow Chart

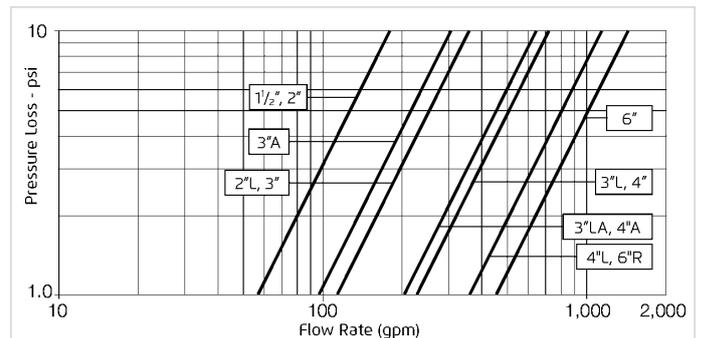

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{CV} \right)^2$$

$CV = \text{gpm @ } \Delta P \text{ of 1 psi}$
 $Q = \text{gpm}$
 $\Delta P = \text{psi}$