




PRESSURE SUSTAINING VALVE

With 3-Way Solenoid Control & Flow Stem

Model IR-130-55-3W-XM

The BERMAD Model IR-130-55-3W-X is a hydraulically operated, diaphragm actuated control valve that sustains minimum preset upstream (back) pressure and opens fully when line pressure is in excess of setting. It either opens or shuts in response to an electric signal.

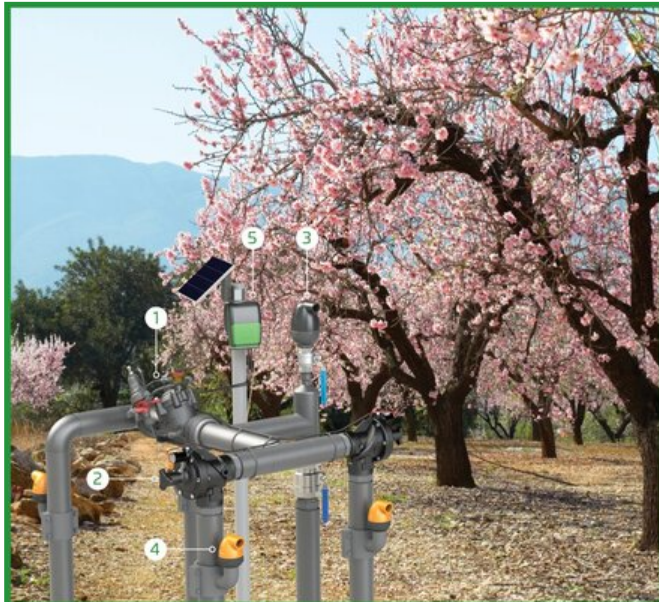

- [1] BERMAD Model IR-130-55-X opens in response to electric signal, sustains supply system pressure preventing emptying, and controls laterals and distribution lines fill-up.
- [2] Solenoid Control Valve Model IR-21T
- [3] Combination Air Valve Model IR-C10
- [4] Kinetic Air Valve Model IR-K10
- [5] Smart Irrigation Controller-OMEGA

Features & Benefits

- Line Pressure Driven, Electrically Controlled On/Off
 - Prioritizes pressure zones & controls system fill-up
 - Sustains upstream line pressure
 - Opens fully upon line pressure rise
- Engineered Composite Valve with Industrial Grade Design
 - Highly durable, chemical and cavitation resistant
 - No internal bolts and nuts
- hYflow 'Y' Valve Body with "Look Through" Design
 - Ultra-high flow capacity at low pressure loss
- Unitized "Flexible Super Travel" (FST) Diaphragm and Guided Plug
 - Accurate and stable regulation with smooth closing
 - Requires low actuation pressure
 - Prevents diaphragm erosion and distortion
- Simple In-Line Inspection and Service


Typical Applications

- Automated Irrigation Systems
- Line Fill-Up Control Solutions
- Line Emptying Prevention
- Remote and/or Elevated Plots
- Infield Filters Backwash Pressure Sustaining
- Energy Saving Irrigation Systems

Operation:

The Shuttle Valve [1] hydraulically connects the Solenoid [2] or the Pressure Sustaining Pilot (PSP) [3] to the Valve Control Chamber [4]. When the solenoid is closed, the PSP commands the valve to throttle closed should Upstream Pressure [P1] drop below setting and to open fully when [P1] rises above setting. In response to an electric signal, the solenoid switches, directing line pressure through the shuttle valve into the control chamber, and thereby causing the main valve to shut. The solenoid also features local manual closing.

All images in this catalog are for illustration only





Technical Data

Pressure Rating:

150 psi

Operating Pressure Range:

7-150 psi

Materials

Body & Cover:

Polyamide 6 & 30% GF

Diaphragm:

NR, Nylon fabric reinforced

Spring:

Stainless Steel

Control Loop Accessories

PS Pilot: PC-SHARP-X-P

Pilot Spring Range:

Spring	Spring Color	Setting range
J	Green	3-25 psi
K	Gray	7-43 psi
N	Natural	12-95 psi
V	Blue & White	15-150 psi

Standard spring - marked in bold

Tubing and Fittings:


Polyethylene and Polypropylene

DC latch solenoid:

S-982-3W P.B.

Technical Specifications

For other patterns and end connection types, Please refer to [BERMAD](#) full engineering page.

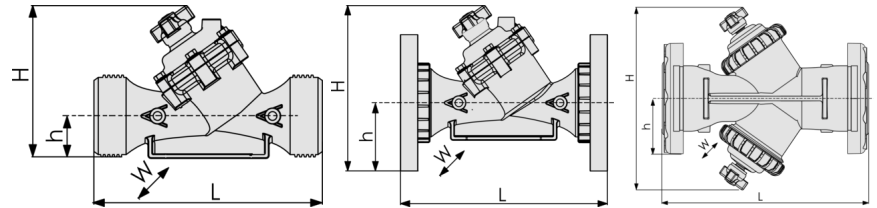


Size	Pattern	End Connection	Weight (Lb)	L (In)	H (In)	h (In)	W	CCDV (Gal)	CV
1½" ; DN40	Oblique	Threaded	2.4	7⅞	6⅞	1⅞	3⅞	0.026	58
2" ; DN50	Oblique	Threaded	2.7	9⅞	6⅞	1⅞	3⅞	0.026	58
2"L ; DN50L	Oblique	Threaded	3	9⅞	7⅞	1⅞	5⅞	0.033	116
2½" ; DN65	Oblique	Threaded	3	9⅞	7⅞	1⅞	5⅞	0.033	116
3" ; DN80	Oblique	Threaded	4	11⅞	7⅞	2⅞	5⅞	0.033	116
3" ; DN80	Oblique	Plastic Flanges	6	12⅞	9⅞	4	7⅞	0.033	116
3" ; DN80	Oblique	Metal Flanges	10	12⅞	9⅞	4	7⅞	0.033	116
3"L ; DN80L	Oblique	Threaded	7	11⅞	9⅞	2⅞	6⅞	0.136	231
3"L ; DN80L	Oblique	Plastic Flanges	8.2	12⅞	12½	4	7⅞	0.136	231
3"L ; DN80L	Oblique	Metal Flanges	10.1	12⅞	12½	4	7⅞	0.136	231
4" ; DN100	Oblique	Plastic Flanges	10	13⅞	13	4½	8⅞	0.136	231
4" ; DN100	Oblique	Metal Flanges	16.3	13⅞	13	4½	8⅞	0.136	231
4"L ; DN100L	Oblique	Plastic Flanges	20.2	17½	13⅞	4½	9	0.253	393
4"L ; DN100L	Oblique	Metal Flanges	24.7	17½	13⅞	4½	9	0.253	393
6"R ; DN150R	Oblique	Metal Flanges	36	18½	14⅞	5⅞	11⅞	0.253	393
6" ; DN150	Boxer	Grooved	26	19	15⅞	4	18⅞	2x0.136	462
6" ; DN150	Boxer	Plastic Flanges	27.6	19⅞	15⅞	5⅞	18⅞	2x0.136	462

Additional Features

Code	Description	Size Range
M	Flow Stem (*Exclude sizes 4"L, 6"R)	1½"-6"
S	Plastic Test Point	1½"-4"
Z	Manual Selector	1½"-4"
V3	Victaulic PVC Adaptors 3"	3"
V4	Victaulic PVC Adaptors 4"	4"

Flow Chart

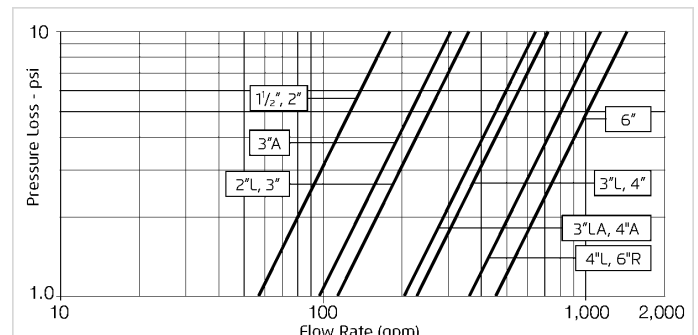

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{Cv} \right)^2$$

Cv = gpm @ ΔP of 1 psi

Q = gpm

ΔP = psi