




PRESSURE SUSTAINING VALVE

Model IR-130-59-3W-X

The BERMAD Model IR-130-59-3W-X is a hydraulically operated, diaphragm actuated control valve designed to maintain proper backwash pressure in filtration systems. During normal irrigation the valve is wide open creating minimal pressure head loss and conserving pumping energy. In response to an electric signal, supplied simultaneously to system flushing command, the IR-130-59-3W-X modulates closed, sustaining minimum preset upstream (back) pressure to filters manufacturer recommendations.

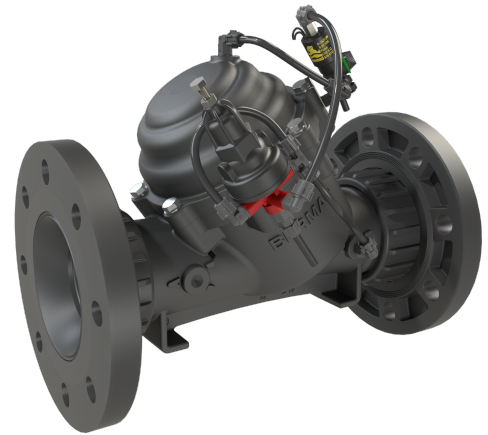

- [1] BERMAD wide open Model IR-130-59-3W-X minimizes pressure loss during irrigation and, in response to an electric signal, sustains filters backwash pressure.
- [2] Kinetic Air Valve Model IR-K10
- [3] Combination Air Valve Model IR-C10
- [4] Electromagnetic Flow Meter
- [5] Pressure Reducing Valve Model IR-120-55-3W-XZ

Features & Benefits


- Hydraulic Valve with Solenoid Control
 - Short response time
 - Maintains low energy system during irrigation
 - Sustains filter station proper backwash pressure
 - Sustains upstream line pressure, controlling system fill up
- Engineered Composite Valve with Industrial Grade Design
 - Adaptable on-site to a wide range of end connection
 - Highly durable, chemical and cavitation resistant
- hYflow 'Y' Valve Body with "Look Through" Design
 - Ultra-high flow capacity at low pressure loss
- Unitized "Flexible Super Travel" (FST) Diaphragm and Guided Plug
 - Accurate and stable regulation with smooth closing
 - Requires low actuation pressure
 - Prevents diaphragm erosion and distortion
 - Simple in-line inspection and service

Typical Applications

- Disc or Media Filter Station Flush Assist
- Remote and/or Elevated Plots
- Pressure Zone Prioritizing
- Line Fill-Up Control
- Line Emptying Prevention
- Low Supplied Pressure Irrigation Systems
- Large Surface Area Reservoirs
- Low Volume Reservoirs

Operation:

The De-Energized Solenoid [1] drains the main valve control chamber, causing the main valve to open wide, energizing the solenoid activates the Pressure Sustaining Pilot [2], which commands the valve to throttle should Upstream Pressure [P1] drop below pilot setting, and to modulate open when [P1] rises above it.

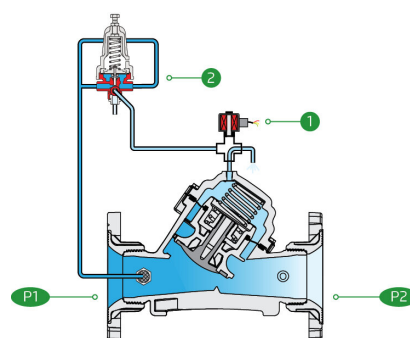



Technical Data

Pressure Rating:

150 psi

Operating Pressure Range:

7-150 psi

Materials

Body & Cover:

Polyamide 6 & 30% GF

Diaphragm:

NR, Nylon fabric reinforced

Spring:

Stainless Steel

Control Loop Accessories

PS Pilot: PC-SHARP-X-P

Pilot Spring Range:

Spring	Spring Color	Setting range
J	Green	3-25 psi
K	Gray	7-43 psi
N	Natural	12-95 psi
V	Blue & White	15-150 psi

Standard spring - marked in bold


Tubing and Fittings:

Polyethylene and Polypropylene

*For other solenoids please consult [BERMAD](http://BERMAD.com)

Technical Specifications

For other patterns and end connection types, Please refer to [BERMAD](http://BERMAD.com) full engineering page.

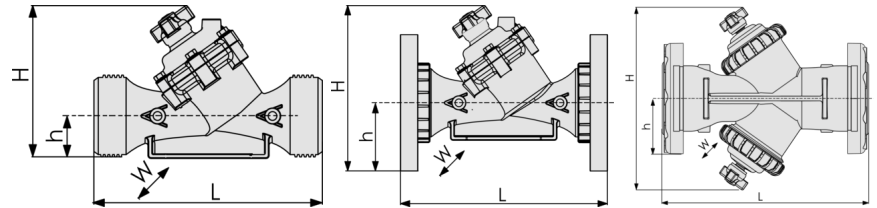


Size	Pattern	End Connection	Weight (Lb)	L (In)	H (In)	h (In)	W	CCDV (Gal)	CV
1½" ; DN40	Oblique	Threaded	2.4	7⅞	6⅞	1⅞	3⅞	0.026	58
2" ; DN50	Oblique	Threaded	2.7	9⅞	6⅞	1⅞	3⅞	0.026	58
2"L ; DN50L	Oblique	Threaded	3	9⅞	7⅞	1⅞	5⅞	0.033	116
2½" ; DN65	Oblique	Threaded	3	9⅞	7⅞	1⅞	5⅞	0.033	116
3" ; DN80	Oblique	Threaded	4	11⅞	7⅞	2⅞	5⅞	0.033	116
3" ; DN80	Oblique	Plastic Flanges	6	12⅞	9⅞	4	7⅞	0.033	116
3" ; DN80	Oblique	Metal Flanges	10	12⅞	9⅞	4	7⅞	0.033	116
3"L ; DN80L	Oblique	Threaded	7	11⅞	9⅞	2⅞	6⅞	0.136	231
3"L ; DN80L	Oblique	Plastic Flanges	8.2	12⅞	12½	4	7⅞	0.136	231
3"L ; DN80L	Oblique	Metal Flanges	10.1	12⅞	12½	4	7⅞	0.136	231
4" ; DN100	Oblique	Plastic Flanges	10	13⅞	13	4½	8⅞	0.136	231
4" ; DN100	Oblique	Metal Flanges	16.3	13⅞	13	4½	8⅞	0.136	231
4"L ; DN100L	Oblique	Plastic Flanges	20.2	17½	13⅞	4½	9	0.253	393
4"L ; DN100L	Oblique	Metal Flanges	24.7	17½	13⅞	4½	9	0.253	393
6"R ; DN150R	Oblique	Metal Flanges	36	18½	14⅞	5⅞	11⅞	0.253	393
6" ; DN150	Boxer	Grooved	26	19	15⅞	4	18⅞	2x0.136	462
6" ; DN150	Boxer	Plastic Flanges	27.6	19⅞	15⅞	5⅞	18⅞	2x0.136	462

CCDV = Control Chamber Displacement Volume • **Threaded** = BSP & NPT are available. External thread is available for 2" and 2½" only. • Other End Connections are available on request. For dimensions and weights of adapters or valves with adapters please consult with customer service.

Additional Features

Code	Description	Size Range
M	Flow Stem (*Exclude sizes 4"L, 6"R)	1½"-6"
S	Plastic Test Point	1½"-4"
Z	Manual Selector	1½"-4"L
V3	Victaulic PVC Adaptors 3"	3"
V4	Victaulic PVC Adaptors 4"	4"

Flow Chart

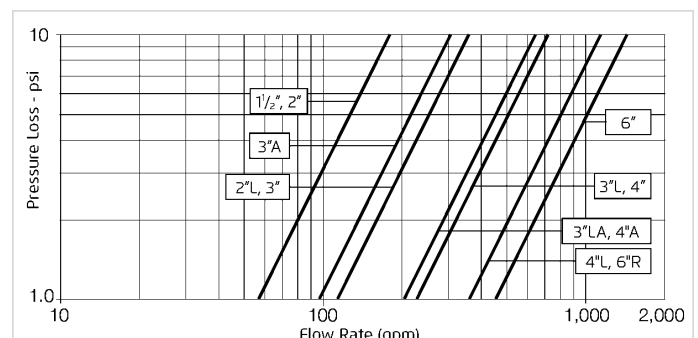

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{Cv} \right)^2$$

$Cv = \text{gpm @ } \Delta P \text{ of 1 psi}$
 $Q = \text{gpm}$
 $\Delta P = \text{psi}$