



PRESSURE SUSTAINING VALVE

With 3-Way Control & Manual Selector & Flow Stem

Model IR-130-3W-XZM

The BERMAD Pressure Sustaining Valve is a hydraulically operated, diaphragm actuated control valve that sustains minimum preset upstream (back) pressure and opens fully when line pressure is in excess of setting.



- [1] BERMAD Model IR-130-3W-XZ sustains supply system pressure and prevents system emptying.
- [2] Solenoid Control Valve Model IR-21T
- [3] Combination Air Valve Model IR-C10
- [4] Kinetic Air Valve Model IR-K10
- [5] Smart Irrigation Controller-OMEGA

Features & Benefits


- Line Pressure Drive, Hydraulically Controlled
 - Prioritizes pressure zones
 - Controls system fill-up
 - Opens fully upon line pressure rise
- Engineered Composite Valve with Industrial Grade Design
 - Highly durable, chemical and cavitation resistant
 - No internal bolts and nuts
- hYflow 'Y' Valve Body with "Look Through" Design
 - Ultra-high flow capacity at low pressure loss
- Unitized "Flexible Super Travel" (FST) Diaphragm and Guided Plug
 - Accurate and stable regulation with smooth closing
 - Requires low opening and actuation pressure
 - Prevents diaphragm erosion and distortion
- Simple In-Line Inspection and Service

Typical Applications

- Line Fill-Up Control Solutions
- Line Emptying Prevention
- Systems Subject to Varying Supply Pressure
- Infield Filters Backwash Pressure Sustaining
- Energy Saving Irrigation Systems

Operation:

The Pressure Sustaining Pilot [1] commands the main valve to throttle closed should Upstream Pressure [P1] drop below setting, and to open fully when [P1] rises above setting. The Manual Selector [2] enables local manual closing.

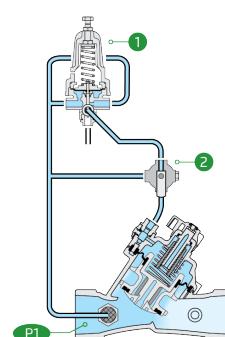



Technical Data

Pressure Rating:

10 bar

Operating Pressure Range:

0.5-10 bar

Materials

Body & Cover:
Polyamide 6 & 30% GF**Diaphragm:**
NR, Nylon fabric reinforced**Spring:**
Stainless Steel

Control Loop Accessories

PS Pilot: PC-SHARP-X-P


Pilot Spring Range:

Spring	Spring Color	Setting range
J	Green	0.2-1.7 bar
K	Gray	0.5-3.0 bar
N	Natural	0.8-6.5 bar
V	Blue & White	1.0-10.0 bar

Standard spring - marked in bold

Tubing and Fittings:
Polyethylene and
Polypropylene

Technical Specifications

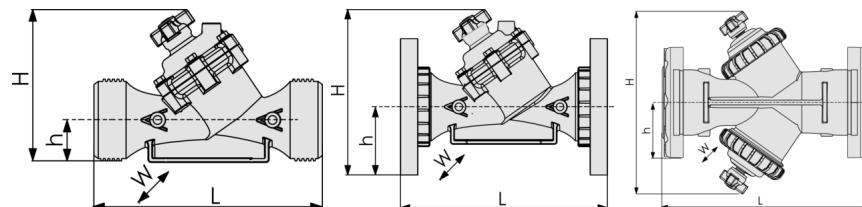For other patterns and end connection types,
Please refer to [BERMAD](#) full engineering page.


Size	Pattern	End Connection	Weight (Kg)	L (mm)	H (mm)	h (mm)	W	CCDV (Lit)	KV
1½" ; DN40	Oblique	Threaded	1.1	200	173	40	97	0.12	50
2" ; DN50	Oblique	Threaded	1.2	230	173	40	97	0.12	50
2½" ; DN50L	Oblique	Threaded	1.5	230	187	43	135	0.15	100
2½" ; DN65	Oblique	Threaded	1.5	230	187	43	135	0.15	100
3" ; DN80	Oblique	Threaded	1.6	298	199	55	135	0.15	100
3" ; DN80	Oblique	Plastic Flanges	2.5	308	244	100	200	0.15	100
3" ; DN80	Oblique	Metal Flanges	4.4	308	244	100	200	0.15	100
3½" ; DN80L	Oblique	Threaded	3	298	278	60	168	0.62	200
3½" ; DN80L	Oblique	Plastic Flanges	3.7	308	317	100	200	0.62	200
3½" ; DN80L	Oblique	Metal Flanges	4.6	308	317	100	200	0.62	200
4" ; DN100	Oblique	Plastic Flanges	4.6	350	329	112	224	0.62	200
4" ; DN100	Oblique	Metal Flanges	7.4	350	329	112	224	0.62	200
4" ; DN100L	Oblique	Plastic Flanges	9.2	442	340	112	226	1.15	340
4" ; DN100L	Oblique	Metal Flanges	11.2	442	340	112	226	1.15	340
6"R ; DN150R	Oblique	Metal Flanges	16.5	470	377	149	287	1.15	340
6" ; DN150	Boxer	Grooved	11	480	387	100	475	2x0.62	400
6" ; DN150	Boxer	Plastic Flanges	12.5	504	387	143	475	2x0.62	400

CCDV = Control Chamber Displacement Volume • Threaded = BSP & NPT are available. External thread is available for 2" and 2½" only. • Other End Connections are available on request. For dimensions and weights of adapters or valves with adapters please consult with customer service.

Additional Features

Code	Description	Size Range
M	Flow Stem (*Exclude sizes 4"R, 6"R)	1½"-6" / DN40-150
5	Plastic Test Point	1½"-4" / DN40-100
V3	Victaulic PVC Adaptors 3"	3" / DN80
V4	Victaulic PVC Adaptors 4"	4" / DN100

Flow Chart

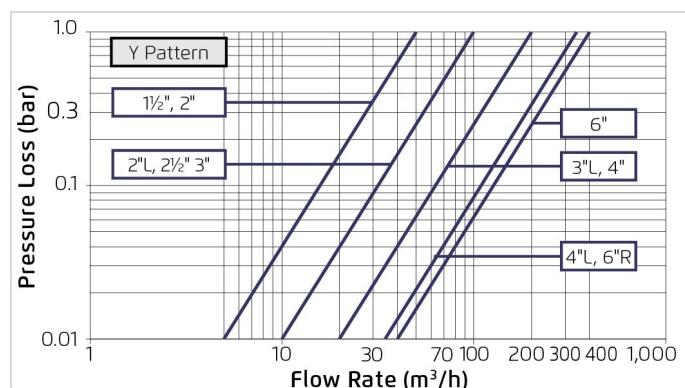

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{Kv} \right)^2$$

$Kv = m^3/h @ \Delta P \text{ of 1 bar}$
 $Q = m^3/h$
 $\Delta P = \text{bar}$