



PRESSURE SUSTAINING VALVE

With 3-Way Control & Manual Selector & Flow Stem

Model IR-130-3W-XZM

The BERMAD Pressure Sustaining Valve is a hydraulically operated, diaphragm actuated control valve that sustains minimum preset upstream (back) pressure and opens fully when line pressure is in excess of setting.



- [1] BERMAD Model IR-130-3W-XZ sustains supply system pressure and prevents system emptying.
- [2] Solenoid Control Valve Model IR-21T
- [3] Combination Air Valve Model IR-C10
- [4] Kinetic Air Valve Model IR-K10
- [5] Smart Irrigation Controller-OMEGA

Features & Benefits


- Line Pressure Drive, Hydraulically Controlled
 - Prioritizes pressure zones
 - Controls system fill-up
 - Opens fully upon line pressure rise
- Engineered Composite Valve with Industrial Grade Design
 - Highly durable, chemical and cavitation resistant
 - No internal bolts and nuts
- hYflow 'Y' Valve Body with "Look Through" Design
 - Ultra-high flow capacity at low pressure loss
- Unitized "Flexible Super Travel" (FST) Diaphragm and Guided Plug
 - Accurate and stable regulation with smooth closing
 - Requires low opening and actuation pressure
 - Prevents diaphragm erosion and distortion
- Simple In-Line Inspection and Service

Typical Applications

- Line Fill-Up Control Solutions
- Line Emptying Prevention
- Systems Subject to Varying Supply Pressure
- Infield Filters Backwash Pressure Sustaining
- Energy Saving Irrigation Systems

Operation:

The Pressure Sustaining Pilot [1] commands the main valve to throttle closed should Upstream Pressure [P1] drop below setting, and to open fully when [P1] rises above setting. The Manual Selector [2] enables local manual closing.





Technical Data

Pressure Rating:

150 psi

Operating Pressure Range:

7-150 psi

Materials

Body & Cover:

Polyamide 6 & 30% GF

Diaphragm:

NR, Nylon fabric reinforced

Spring:

Stainless Steel

Control Loop Accessories

PS Pilot: PC-SHARP-X-P

Pilot Spring Range:

Spring	Spring Color	Setting range
J	Green	3-25 psi
K	Gray	7-43 psi
N	Natural	12-95 psi
V	Blue & White	15-150 psi


Standard spring - marked in bold

Tubing and Fittings:

Polyethylene and Polypropylene

Technical Specifications

For other patterns and end connection types, Please refer to [BERMAD](#) full engineering page.

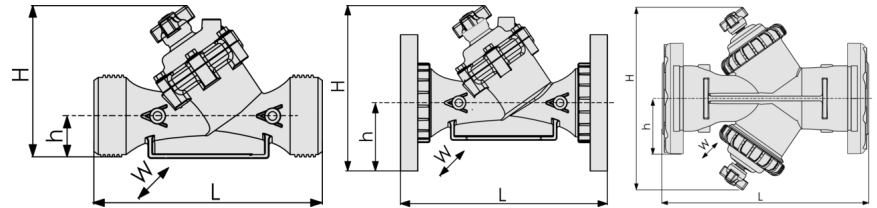


Size	Pattern	End Connection	Weight (Lb)	L (In)	H (In)	h (In)	W	CCDV (Gal)	CV
1½" ; DN40	Oblique	Threaded	2.4	7⅞	6⅞	1⅞	3⅞	0.026	58
2" ; DN50	Oblique	Threaded	2.7	9⅞	6⅞	1⅞	3⅞	0.026	58
2"L ; DN50L	Oblique	Threaded	3	9⅞	7⅞	1⅞	5⅞	0.033	116
2½" ; DN65	Oblique	Threaded	3	9⅞	7⅞	1⅞	5⅞	0.033	116
3" ; DN80	Oblique	Threaded	4	11⅞	7⅞	2⅞	5⅞	0.033	116
3" ; DN80	Oblique	Plastic Flanges	6	12⅞	9⅞	4	7⅞	0.033	116
3" ; DN80	Oblique	Metal Flanges	10	12⅞	9⅞	4	7⅞	0.033	116
3"L ; DN80L	Oblique	Threaded	7	11⅞	9⅞	2⅞	6⅞	0.136	231
3"L ; DN80L	Oblique	Plastic Flanges	8.2	12⅞	12½	4	7⅞	0.136	231
3"L ; DN80L	Oblique	Metal Flanges	10.1	12⅞	12½	4	7⅞	0.136	231
4" ; DN100	Oblique	Plastic Flanges	10	13⅞	13	4½	8⅞	0.136	231
4" ; DN100	Oblique	Metal Flanges	16.3	13⅞	13	4½	8⅞	0.136	231
4"L ; DN100L	Oblique	Plastic Flanges	20.2	17½	13⅞	4½	9	0.253	393
4"L ; DN100L	Oblique	Metal Flanges	24.7	17½	13⅞	4½	9	0.253	393
6"R ; DN150R	Oblique	Metal Flanges	36	18½	14⅞	5⅞	11⅞	0.253	393
6" ; DN150	Boxer	Grooved	26	19	15⅞	4	18⅞	2x0.136	462
6" ; DN150	Boxer	Plastic Flanges	27.6	19⅞	15⅞	5⅞	18⅞	2x0.136	462

CCDV = Control Chamber Displacement Volume • **Threaded** = BSP & NPT are available. External thread is available for 2" and 2½" only. • Other End Connections are available on request. For dimensions and weights of adapters or valves with adapters please consult with customer service.

Additional Features

Code	Description	Size Range
M	Flow Stem (*Exclude sizes 4"L, 6"R)	1½"-6"
5	Plastic Test Point	1½"-4"
V3	Victaulic PVC Adaptors 3"	3"
V4	Victaulic PVC Adaptors 4"	4"

Flow Chart

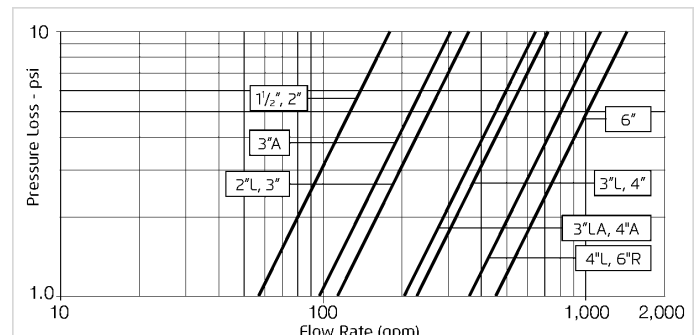

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{Cv} \right)^2$$

$Cv = \text{gpm @ } \Delta P \text{ of 1 psi}$
 $Q = \text{gpm}$
 $\Delta P = \text{psi}$