




# QUICK PRESSURE RELIEF VALVE

## Model IR-13Q-2W

The BERMAD Model IR-13Q-2W is a hydraulically operated, diaphragm actuated control valve designed to relieve excessive line pressure when it rises above the preset maximum. It responds to rises in system pressure immediately, accurately and with high repeatability, by opening fully. The BERMAD Model IR-13Q-2W provides smooth drip tight closing.

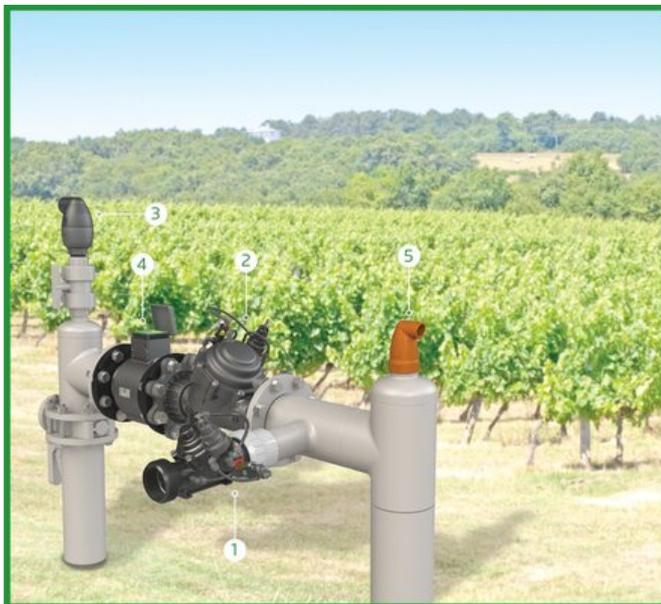

- [1]** BERMAD Model IR-13Q-2W protects system from pressure spikes.
- [2]** Pressure Reducing Valve Model IR-120-55-X
- [3]** Combination Air Valve Model IR-C10
- [4]** Electromagnetic Water Meter Model M10
- [5]** Kinetic Air Valve Model IR-K10

### Features & Benefits


- Hydraulic Control Valve
  - Line pressure driven
  - Short response time
  - Long term drip tight sealing
- Engineered Composite Valve with Industrial Grade Design
  - Adaptable on-site to a wide range of end connection
  - Highly durable, chemical and cavitation resistant
- hYflow 'Y' Valve Body with "Look Through" Design
  - Ultra-high flow capacity at low pressure loss
- Unitized "Flexible Super Travel" (FST) Diaphragm and Guided Plug
  - Accurate and stable regulation with smooth closing
  - Requires low actuation pressure
  - Prevents diaphragm erosion and distortion
  - Simple in-line inspection and service

### Typical Applications

- System Burst Protection
- Momentary Pressure Peak Elimination
- System Failure Visual Indication
- Filter Burst Protection

### Operation:

The Pressure Relief Pilot **[1]** commands the valve to open immediately should the upstream pressure **[P1]** abruptly rise above pilot setting, and to close smoothly when it falls below pilot setting, sealing drip tight. The Cock Valve **[2]** enables manual operating test.





Technical Data

**Pressure Rating:**  
150 psi

**Operating Pressure Range:**  
7-150 psi

**Materials**

**Body & Cover:**  
Polyamide 6 & 30% GF

**Diaphragm:**  
NR, Nylon fabric reinforced

**Spring:**  
Stainless Steel

**Control Loop Accessories**

**PS Pilot:** PC-3Q-A-P

**Pilot Spring Range:**


Spring	Spring Color	Setting range
V	Blue & White	15-150 psi

**Tubing and Fittings:**

Polyethylene and Polypropylene

Technical Specifications

For other patterns and end connection types, Please refer to [BERMAD](#) full engineering page.

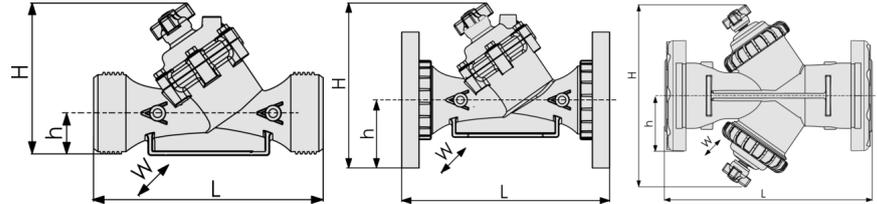


Size	Pattern	End Connection	Weight (Lb)	L (In)	H (In)	h (In)	w	CCDV (Gal)	CV
1½" ; DN40	Oblique	Threaded	2.4	7¾	6¾	1½	3¾	0.026	58
2" ; DN50	Oblique	Threaded	2.7	9¾	6¾	1½	3¾	0.026	58
2"L ; DN50L	Oblique	Threaded	3	9¾	7¾	1¾	5¾	0.033	116
2½" ; DN65	Oblique	Threaded	3	9¾	7¾	1¾	5¾	0.033	116
3" ; DN80	Oblique	Threaded	4	11¾	7¾	2¼	5¾	0.033	116
3" ; DN80	Oblique	Plastic Flanges	6	12¾	9¾	4	7¾	0.033	116
3" ; DN80	Oblique	Metal Flanges	10	12¾	9¾	4	7¾	0.033	116
3"L ; DN80L	Oblique	Threaded	7	11¾	9¾	2¾	6¾	0.136	231
3"L ; DN80L	Oblique	Plastic Flanges	8.2	12¾	12½	4	7¾	0.136	231
3"L ; DN80L	Oblique	Metal Flanges	10.1	12¾	12½	4	7¾	0.136	231
4" ; DN100	Oblique	Plastic Flanges	10	13¾	13	4½	8¾	0.136	231
4" ; DN100	Oblique	Metal Flanges	16.3	13¾	13	4½	8¾	0.136	231
4"L ; DN100L	Oblique	Plastic Flanges	20.2	17¾	13¾	4½	9	0.253	393
4"L ; DN100L	Oblique	Metal Flanges	24.7	17¾	13¾	4½	9	0.253	393
6"R ; DN150R	Oblique	Metal Flanges	36	18½	14¾	5¾	11¾	0.253	393
6" ; DN150	Boxer	Grooved	26	19	15¾	4	18¾	2x0.136	462
6" ; DN150	Boxer	Plastic Flanges	27.6	19¾	15¾	5¾	18¾	2x0.136	462

CCDV = Control Chamber Displacement Volume • **Threaded** = BSP & NPT are available. External thread is available for 2" and 2½" only. • Other End Connections are available on request. For dimensions and weights of adapters or valves with adapters please consult with customer service.

Additional Features

Code	Description	Size Range
5	Plastic Test Point	1½"-4"
V3	Victaulic PVC Adaptors 3"	3"
V4	Victaulic PVC Adaptors 4"	4"

Flow Chart

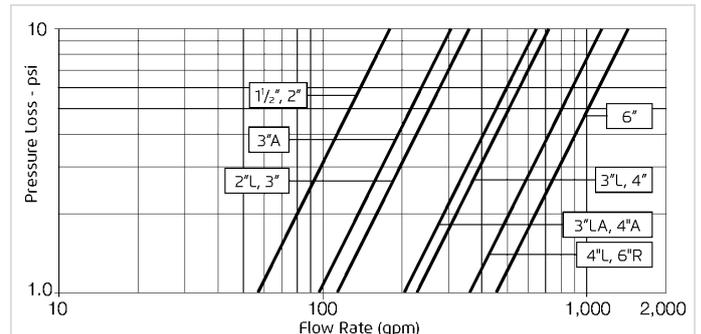

2-Way circuit "Added Head Loss" (for "V" below 6.5 f/s): 4.5 psi

Differential Pressure & Flow Calculation

$$\Delta P = \left( \frac{Q}{CV} \right)^2$$

Cv = gpm @ ΔP of 1 psi  
 Q = gpm  
 ΔP = psi