


LEVEL CONTROL VALVE

With Modulating Horizontal Float

Model IR-150-N3-60-2W

Hydraulically operated control valve that controls reservoir filling and reservoir level. Reservoir filling is accomplished in response to a hydraulically modulating horizontal float that maintains a constant water level, regardless of fluctuating demand.

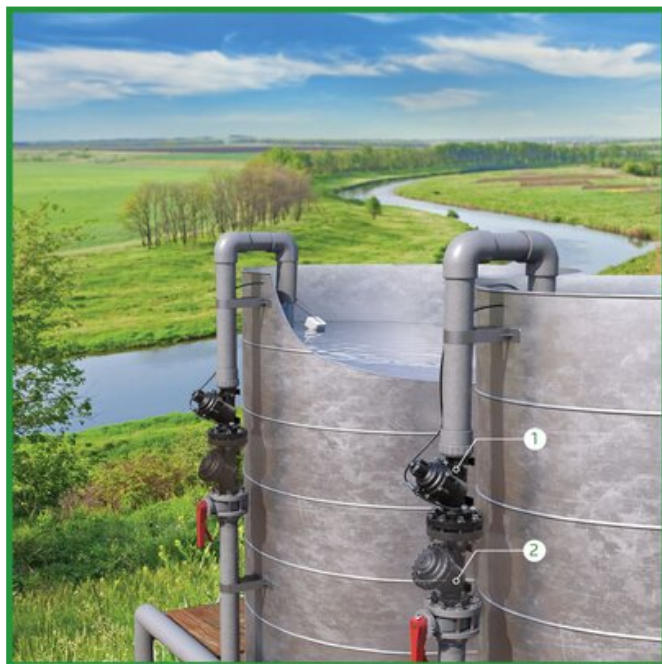

[1] BERMAD Model IR-150-N3-60-2W opens upon drop in reservoir level maintaining "Always Full" reservoir, and shuts on rise in reservoir level to preset high.

[2] Strainer

Features & Benefits


- Line Pressure Driven Hydraulic Level Control
 - "Always Full" reservoir
 - Prevents reservoir overflow
- Engineered Composite Valve with Industrial Grade Design
 - Adaptable on-site to a wide range of end connection
 - Articulated flange connections that eliminate line bending and hydraulic stresses
 - Highly durable, chemical and cavitation resistant
- hYflow 'Y' Valve Body with "Look Through" Design
 - Ultra-high flow capacity at low pressure loss
- Unitized "Flexible Super Travel" (FST) Diaphragm and Guided Plug
 - Accurate and stable regulation with smooth closing
 - Requires low actuation pressure
 - Prevents diaphragm erosion and distortion
 - Simple in-line inspection and service

Typical Applications

- Plastic Irrigation Systems
- Large Surface Area Reservoirs
- Low Volume Reservoirs
- Fertilizer Mixing Tanks
- Installation sites with no available power supply
- Constant level control systems where maintaining full tank level is required

Operation:

The Internal Restriction & Filter [1] allows continuous flow from valve inlet into the Control Chamber [2]. When water level rises, it pushes the Float [3] up throttling the Float Pilot [4]. Pressure in the control chamber accumulates, causing the valve to throttle closed, reducing filling rate, and eventually closing drip tight.

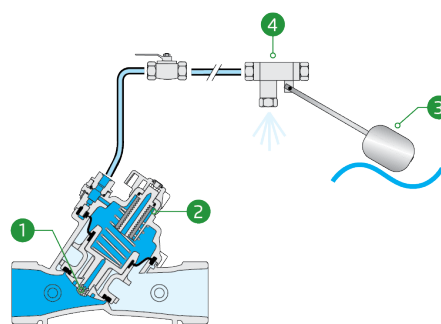



Technical Data

Pressure Rating:

150 psi

Operating Pressure Range:

7-150 psi

Materials

Body & Cover:

Polyamide 6 & 30% GF

Diaphragm:

NR, Nylon fabric reinforced

Spring:

Stainless Steel

Control Loop Accessories


Tubing and Fittings:

Polyethylene and

Polypropylene

Technical Specifications

For other patterns and end connection types,
Please refer to [BERMAD](#) full engineering page.

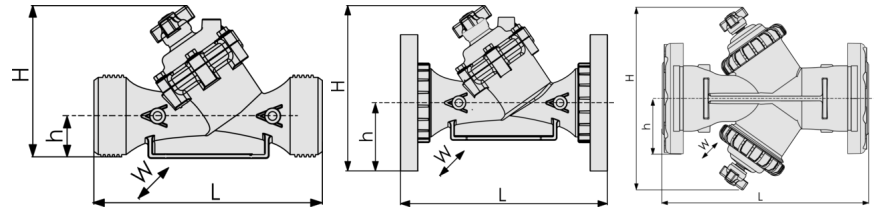


Size	Pattern	End Connection	Weight (Lb)	L (In)	H (In)	h (In)	W	CCDV (Gal)	CV
1½" ; DN40	Oblique	Threaded	2.4	7⅞	6⅞	1⅞	3⅞	0.026	58
2" ; DN50	Oblique	Threaded	2.7	9⅞	6⅞	1⅞	3⅞	0.026	58
2"L ; DN50L	Oblique	Threaded	3	9⅞	7⅞	1⅞	5⅞	0.033	116
2½" ; DN65	Oblique	Threaded	3	9⅞	7⅞	1⅞	5⅞	0.033	116
3" ; DN80	Oblique	Threaded	4	11⅞	7⅞	2⅞	5⅞	0.033	116
3" ; DN80	Oblique	Plastic Flanges	6	12⅞	9⅞	4	7⅞	0.033	116
3" ; DN80	Oblique	Metal Flanges	10	12⅞	9⅞	4	7⅞	0.033	116
3"L ; DN80L	Oblique	Threaded	7	11⅞	9⅞	2⅞	6⅞	0.136	231
3"L ; DN80L	Oblique	Plastic Flanges	8.2	12⅞	12½	4	7⅞	0.136	231
3"L ; DN80L	Oblique	Metal Flanges	10.1	12⅞	12½	4	7⅞	0.136	231
4" ; DN100	Oblique	Plastic Flanges	10	13⅞	13	4½	8⅞	0.136	231
4" ; DN100	Oblique	Metal Flanges	16.3	13⅞	13	4½	8⅞	0.136	231
4"L ; DN100L	Oblique	Plastic Flanges	20.2	17½	13⅞	4½	9	0.253	393
4"L ; DN100L	Oblique	Metal Flanges	24.7	17½	13⅞	4½	9	0.253	393
6"R ; DN150R	Oblique	Metal Flanges	36	18½	14⅞	5⅞	11⅞	0.253	393
6" ; DN150	Boxer	Grooved	26	19	15⅞	4	18⅞	2x0.136	462
6" ; DN150	Boxer	Plastic Flanges	27.6	19⅞	15⅞	5⅞	18⅞	2x0.136	462

CCDV = Control Chamber Displacement Volume • **Threaded** = BSP & NPT are available. External thread is available for 2" and 2½" only. • Other End Connections are available on request. For dimensions and weights of adapters or valves with adapters please consult with customer service.

Additional Features

Code	Description	Size Range
M	Flow Stem (*Exclude sizes 4"L, 6"R)	1½"-6"
S	Plastic Test Point	1½"-4"
Z	Manual Selector	1½"-4"L
V3	Victaulic PVC Adaptors 3"	3"
V4	Victaulic PVC Adaptors 4"	4"

Flow Chart

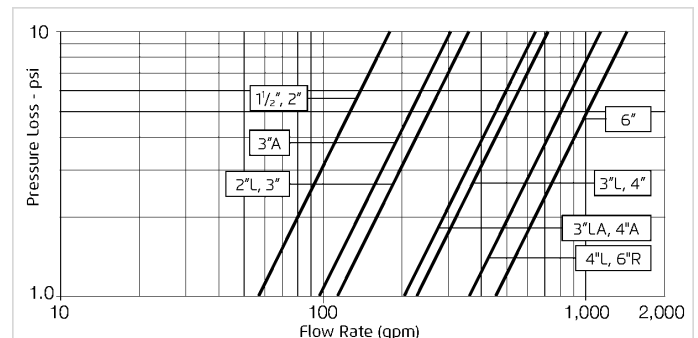

2-Way circuit "Added Head Loss" (for "V" below 6.5 f/s): 4.5 psi

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{CV} \right)^2$$

Cv = gpm @ ΔP of 1 psi

Q = gpm

ΔP = psi