

FLOW CONTROL VALVE

With Hydraulic Remote Control

Model IR-170-50-DZb

The BERMAD Flow Control Valve with Hydraulic Remote Control is a hydraulically operated, diaphragm actuated control valve that limits system demand to a preset maximum flow rate. It either opens or shuts in response to a remote pressure command.



- [1] BERMAD Model IR-170-50-bDZ opens upon pressure drop command, limits fill-up rate and consumer over-demand and maintains filter backwash pressure.
- [2] Kinetic Air Valve Model IR-K10
- [3] Combination Air Valve Model IR-C10
- [4] RTU-Remote Terminal Unit
- [5] Pressure Sustaining Valve Model IR-130-59-3W-X

Features & Benefits


- Line Pressure Driven, Hydraulically Controlled On/Off
 - Limits fill-up rate and consumer excessive demand
- Adjustable Servo Flow Pilot Controlled
 - Dynamic integrated needle valve
- Engineered Composite Valve with Industrial Grade Design
 - Adaptable on-site to a wide range of end connection
 - Articulated flange connections that eliminate line bending and hydraulic stresses
 - Highly durable, chemical and cavitation resistant
- hYflow 'Y' Valve Body with "Look Through" Design
 - Ultra-high flow capacity at low pressure loss
- Unitized "Flexible Super Travel" (FST) Diaphragm and Guided Plug
 - Accurate and stable regulation with smooth closing
 - Requires low actuation pressure
 - Prevents diaphragm erosion and distortion
- Internal "Differential Pressure Duct" Flow Sensor
 - No moving parts
 - Saves space and simplifies installation

Typical Applications

- Automated Irrigation Systems
- Line Fill-Up Control
- Multiple Independent Consumer Systems
- Distribution Centers
- Filter Stations

Operation:

Pressure Differential (ΔP) across the Differential Pressure Duct [1] is in direct proportion to demand. The Flow Pilot [2] continuously senses ΔP and commands the Valve to throttle closed should demand rise above pilot setting. The Shuttle Valve [3] directs the pilot command into the main Valve Control Chamber [4]. Upon pressure rise command, the shuttle valve automatically switches, allowing pressurization of the control chamber, shutting the main Valve. The Manual Selector [5] enables local manual closing.





Technical Data

Pressure Rating:
10 bar

Operating Pressure Range:
0.5-10 bar

Materials

Body & Cover:
Polyamide 6 & 30% GF

Diaphragm:
NR, Nylon fabric reinforced

Spring:
Stainless Steel

Control Loop Accessories

FC Pilot: PC-SD-A-P


Pilot Spring Range:

Spring	Spring Color	Setting range
J	Green	0.2-1.7 bar

Tubing and Fittings:
Polyethylene and
Polypropylene

Technical Specifications

For other patterns and end connection types,
Please refer to [BERMAD](#) full engineering page.

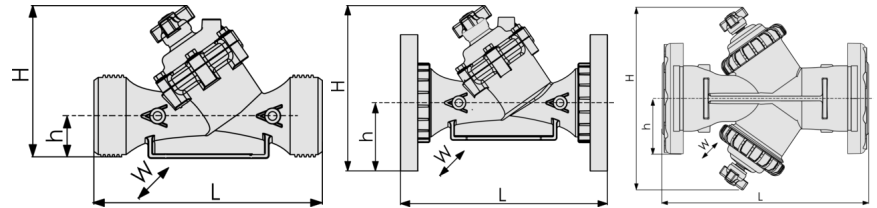

Size	Pattern	End Connection	Weight (Kg)	L (mm)	H (mm)	h (mm)	W	CCDV (Lit)	KV
1½" ; DN40	Oblique	Threaded	1.1	200	173	40	97	0.12	50
2" ; DN50	Oblique	Threaded	1.2	230	173	40	97	0.12	50
2"L ; DN50L	Oblique	Threaded	1.5	230	187	43	135	0.15	100
2½" ; DN65	Oblique	Threaded	1.5	230	187	43	135	0.15	100
3" ; DN80	Oblique	Threaded	1.6	298	199	55	135	0.15	100
3" ; DN80	Oblique	Plastic Flanges	2.5	308	244	100	200	0.15	100
3" ; DN80	Oblique	Metal Flanges	4.4	308	244	100	200	0.15	100
3"L ; DN80L	Oblique	Threaded	3	298	278	60	168	0.62	200
3"L ; DN80L	Oblique	Plastic Flanges	3.7	308	317	100	200	0.62	200
3"L ; DN80L	Oblique	Metal Flanges	4.6	308	317	100	200	0.62	200
4" ; DN100	Oblique	Plastic Flanges	4.6	350	329	112	224	0.62	200
4" ; DN100	Oblique	Metal Flanges	7.4	350	329	112	224	0.62	200
4"L ; DN100L	Oblique	Plastic Flanges	9.2	442	340	112	226	1.15	340
4"L ; DN100L	Oblique	Metal Flanges	11.2	442	340	112	226	1.15	340
6"R ; DN150R	Oblique	Metal Flanges	16.5	470	377	149	287	1.15	340
6" ; DN150	Boxer	Grooved	11	480	387	100	475	2x0.62	400
6" ; DN150	Boxer	Plastic Flanges	12.5	504	387	143	475	2x0.62	400


CCDV = Control Chamber Displacement Volume • **Threaded** = BSP & NPT are available. External thread is available for 2" and 2½" only. • Other End Connections are available on request. For dimensions and weights of adapters or valves with adapters please consult with customer service.

*For flow limit in sizes 4"L-6" required velocity above 2 m/sec.

Additional Features

Code	Description	Size Range
M	Flow Stem (*Exclude sizes 4"L, 6"R)	1½"-6" / DN40-150
S	Plastic Test Point	1½"-4" / DN40-100
Z	Manual Selector	1½"-4"L / DN40-100L
V3	Victaulic PVC Adaptors 3"	3" / DN80
V4	Victaulic PVC Adaptors 4"	4" / DN100

Flow Chart

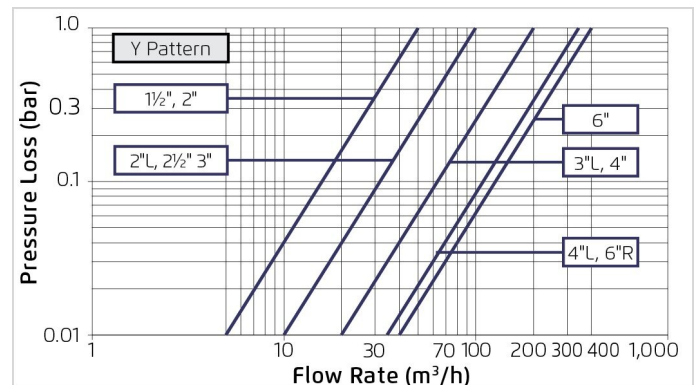

2-Way circuit "Added Head Loss" (for "V" below 2 m/s): 0.3 bar

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{K_v} \right)^2$$

$K_v = m^3/h$ @ ΔP of 1 bar

$Q = m^3/h$

$\Delta P = \text{bar}$