



PRESSURE SUSTAINING VALVE

Model IR-230-2W-M

The BERMAD Pressure Sustaining Valve is a hydraulically operated, diaphragm actuated control valve that sustains minimum preset upstream (back) pressure. It either opens or shuts in response to a remote pressure command. When installed offline, the BERMAD Model IR-230-2W-M relieves line pressure in excess of preset pressure.

*This valve is designated for irrigation use only and not for other uses! Manufacturer warranty is limited to the permitted use only.



- [1] BERMAD Model IR-230-2W-M protects pump from overload and cavitation, prevents main line emptying, and controls system fill-up.
- [2] Filter Backwash Hydraulic Valve Model IR-350
- [3] Combination Air Valve Model C10
- [4] Vacuum Breaker

Features & Benefits


- Line Pressure Drive, Hydraulically Controlled
 - Sustains upstream line pressure, controlling system fill up
 - Relieves excessive pressure protecting pump and system
- Composite Hydro-Efficient Globe Valve
 - Unobstructed flow path
 - Single moving part
 - High flow capacity
 - Highly durable, chemical and cavitation resistant
- Unitized Flexible Diaphragm and Guided Plug
 - Excellent low flow regulation performances
 - Prevents diaphragm erosion and distortion
- Fully Supported & Balanced Diaphragm
 - Requires low actuation pressure
- User-Friendly Design
 - Simple in-line inspection and service

Typical Applications

- Automated Irrigation Systems
- Pressure Zone Prioritizing
- Greenhouses Irrigation
- Filter Stations
- Control of Fertilization Systems

Operation:

The Pressure Sustaining Pilot [1] commands the Valve to throttle closed should Upstream Pressure [P1] drop below pilot setting, and to modulate open when it rises above pilot setting.

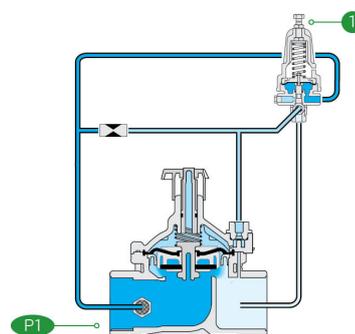



Technical Data

Pressure Rating:
150 psi

Operating Pressure Range:
10-150 psi

Materials

Body & Cover:
Polyamide 6 & 30% GF

Diaphragm:
NBR

Spring:
Stainless Steel

Control Loop Accessories

PS Pilot: PC-30-A-P

Pilot Spring Range:

Spring	Spring Color	Setting range
N	Natural	12-95 psi
V	Blue & White	15-150 psi


Standard spring - marked in bold

Tubing and Fittings:

Polyethylene and Polypropylene

Technical Specifications

For other end connection types, Please refer to [BERMAD](#) full engineering page.

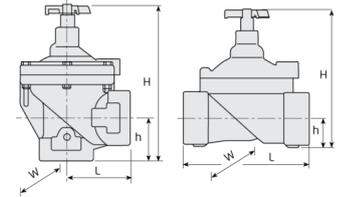


Size	Pattern	End Connection	Weight (Lb)	L (In)	H (In)	h (In)	W	CCDV (Gal)	CV
1½" ; DN40	Globe	Threaded	2.2	6¾	7½	1¾	5	0.016	43
1½" ; DN40	Angle	Threaded	2.1	3¾	7½	1¾	5	0.016	47
2" ; DN50	Globe	Threaded	2.4	6¾	12¾	1½	5	0.016	54
2" ; DN50	Angle	Threaded	2	3¾	8¾	2¾	5	0.016	60

CCDV = Control Chamber Displacement Volume

Additional Features

Code	Description	Size Range
M	Flow Stem	1½"-2"
5	Plastic Test Point	1½"-2"

Flow Chart

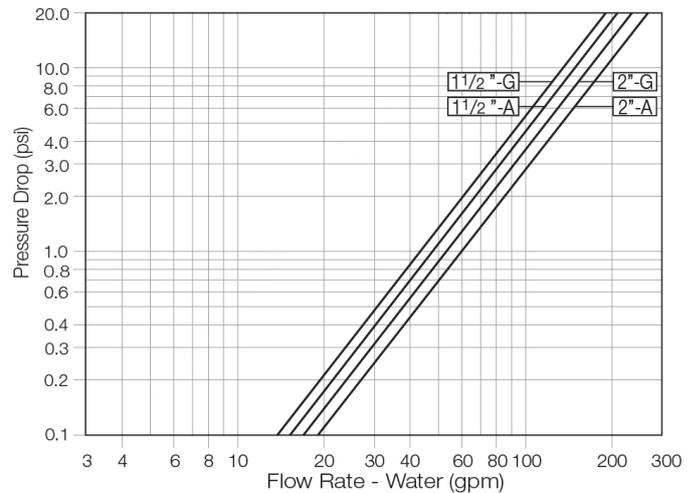

2-Way circuit "Added Head Loss" (for "V" below 6.5 f/s): 4.5 psi

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{Cv} \right)^2$$

$Cv = \text{gpm @ } \Delta P \text{ of 1 psi}$
 $Q = \text{gpm}$
 $\Delta P = \text{psi}$