

PRESSURE REDUCING VALVE

With 3-Way Control, Hyd Remote Control,
Manual Selector, Check Point & Plastic
Control Accessories

Model IR-420-50-3W-KXZ5

The BERMAD Pressure Reducing Valve with hydraulic remote control is hydraulically operated, diaphragm actuated control valve that reduces higher upstream pressure to lower constant downstream pressure regardless of fluctuating demand, and opens fully upon line pressure drop. It either opens or shuts in response to a remote pressure command.



- [1] BERMAD Model IR-420-50-3W-KXZ opens upon pressure drop command, and establishes pressure zone protecting laterals and distribution line.
- [2] Hydrometer Model IR-900-M0-Magnetic Drive
- [3] Combination Air Valve Model IR-C10
- [4] Combination Air Valve Model IR-C30
- [5] Smart Irrigation Controller-OMEGA

Features & Benefits


- Hydraulic Pressure Control
 - Line pressure driven
 - Protects downstream systems
 - Opens fully upon line pressure drop
 - Hydraulically controlled On/Off
- Advanced Hydro-Efficient Globe Design
 - Unobstructed flow path
 - Single moving part
 - High flow capacity
- Fully Supported & Balanced Diaphragm
 - Requires low actuation pressure
 - Excellent low flow regulation performances
 - Progressively restrains valve closing
 - Prevents diaphragm distortion
- User-Friendly Design
 - Easy pressure setting
 - Simple in-line inspection and service


Typical Applications

- Automated Irrigation Systems
- Pressure Reducing Systems
- Systems Subject to Varying Supply Pressure
- Distribution Centers

Operation:

The Shuttle Valve [1] hydraulically connects the Pressure Reducing Pilot (PRP) [2] to the Valve Control Chamber [3]. The PRP commands the valve to throttle closed should Downstream Pressure [P2] rise above pilot setting and to open fully when it drops below pilot setting. Upon command pressure rise, the shuttle valve automatically switches, allowing pressurization of the control chamber, which causes the main valve to shut. The Manual Selector [4] enables local manual closing.





Technical Data

Pressure Rating:

150 psi

Operating Pressure Range:

7-150 psi

Materials
Body & Cover:

Cast Iron

Diaphragm:

NR, Nylon fabric reinforced

Spring:

Stainless Steel

**Other materials are available on request*
Control Loop Accessories
PR Pilot: PC-SHARP-X-P

Pilot Spring Range:

Spring	Spring Color	Setting range
J	Green	3-25 psi
K	Gray	7-43 psi
N	Natural	12-95 psi
V	Blue & White	15-150 psi

Standard spring - marked in bold
Tubing and Fittings:




Polyethylene and

Polypropylene

**For other pilots please consult
BERMAD*

Technical Specifications

For other end connection types,

 Please refer to [BERMAD](#) full engineering page.


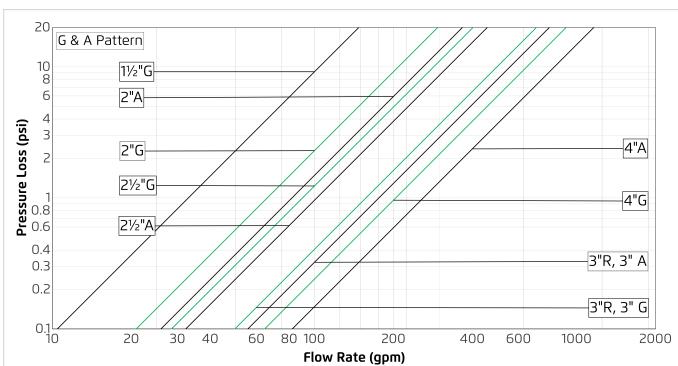
Size	Pattern	End Connection	Weight (Lb)	L (In)	H (In)	h (In)	W	CCDV (Gal)	CV
1" ; DN25	Globe	Threaded	2.4	4%	2 1/4	1%	2 1/8	0.005	15
1 1/2" ; DN40	Globe	Threaded	4.4	6 1/8	3 5/8	1 1/4	3 1/8	0.016	33
2" ; DN50	Globe	Threaded	8.8	7 1/8	4 1/2	1 1/2	4 1/4	0.03	66
2" ; DN50	Globe	Flanged	19.8	8 1/8	6 1/8	3 1/8	6 1/8	0.03	66
2" ; DN50	Globe	Grooved	11	8 1/8	4 1/4	1 1/4	4 1/4	0.03	66
2" ; DN50	Angle	Threaded	9.7	3 1/2	5 3/8	2 1/2	4 1/4	0.03	82
2" ; DN50	Angle	Flanged	19.8	4 1/4	7 1/8	3 3/8	6 1/8	0.03	82
2 1/2" ; DN65	Globe	Threaded	12.6	8 1/8	5 1/4	1 1/8	5 1/8	0.05	90
2 1/2" ; DN65	Globe	Flanged	23.1	8 1/8	7	3 1/2	7	0.05	90
2 1/2" ; DN65	Angle	Threaded	12.8	4%	7 1/8	3 3/4	5 1/4	0.05	102
3R" ; DN80R	Globe	Threaded	12.9	8 1/8	5 1/2	2 1/8	5 1/8	0.08	157
3R" ; DN80R	Globe	Flanged	28	8 1/8	7 1/8	4	7 1/8	0.08	157
3R" ; DN80R	Angle	Threaded	15.4	4%	7	3 3/8	5 1/4	0.08	176
3" ; DN80	Globe	Threaded	28.7	10 1/8	6 1/2	2 1/4	6 1/4	0.08	157
3" ; DN80	Globe	Flanged	41.9	9 1/8	8 1/4	4	7 1/8	0.08	157
3" ; DN80	Globe	Grooved	23.4	9 1/8	6 1/8	1 1/8	6 1/8	0.08	157
3" ; DN80	Angle	Threaded	24.3	4%	7 1/8	3 1/4	6 1/4	0.08	176
3" ; DN80	Angle	Flanged	37.5	6 1/8	8 1/8	4	7 1/8	0.08	176
3" ; DN80	Angle	Grooved	22.1	4 1/4	11	3 3/8	6 1/4	0.08	176
4" ; DN100	Globe	Flanged	61.7	12%	9 5/8	4 1/2	8 1/8	0.18	236
4" ; DN100	Globe	Grooved	35.7	12%	7 1/8	2 1/2	8	0.18	236
4" ; DN100	Angle	Flanged	57.3	6%	8 3/8	4 1/2	8 7/8	0.18	260
4" ; DN100	Angle	Grooved	35.3	6%	8 3/8	4 1/2	8 7/8	0.18	260

CCDV = Control Chamber Displacement Volume • Threaded = BSP & NPT are available.

Additional Features

Code	Description	Size Range
I	Position Indicator Assembly	1 1/2" - 4"
M	Flow Stem	1 1/2" - 4"
5	Plastic Test Point	1 1/2" - 4"

Flow Chart



Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{Cv} \right)^2 \quad Cv = \text{gpm} @ \Delta P \text{ of 1 psi}$$

$$Q = \text{gpm}$$

$$\Delta P = \text{psi}$$


www.bermad.com

 The information contained herein may be changed by BERMAD without notice. BERMAD shall not be held liable for any errors.
 © Copyright 2015-2025 BERMAD CS Ltd

January 2026