


# PRESSURE REDUCING VALVE

## Model IR-420-55-3W-RX

The BERMAD Pressure Reducing Valve with solenoid control is a hydraulically operated, diaphragm actuated control valve that reduces higher upstream pressure to lower constant downstream pressure regardless of fluctuating demand, and opens fully upon line pressure drop. It either opens or shuts in response to an electric signal.

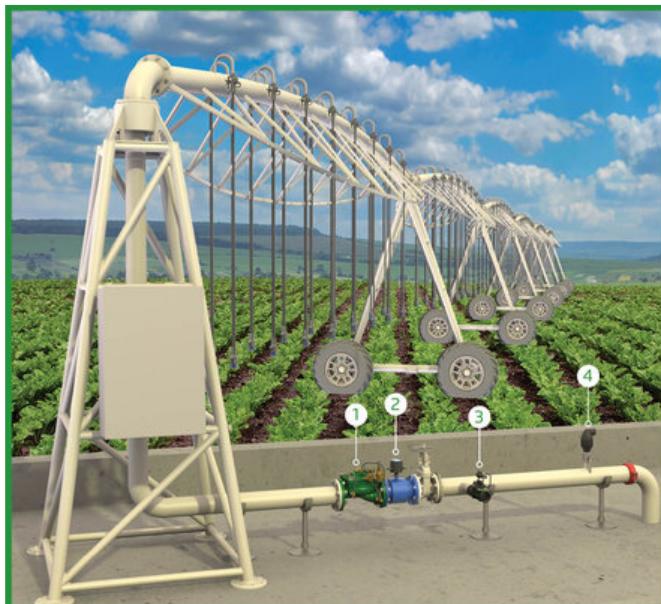

- [1] BERMAD Model IR-420-55-3W-RX opens in response to electric signal, and establishes reduced pressure zone protecting laterals and distribution line.
- [2] Water Meter Model MUT2300
- [3] Pressure Relief Valve Model IR-13Q-HP
- [4] Combination Air Valve Model C30

### Features & Benefits


- 3-Way Hydraulically Actuated PRV with electric On/Off control
  - Protects downstream systems
  - Opens fully upon line pressure drop
  - Wide range of pressure settings
  - Wide range of Solenoid operation Voltages
  - Normally Open, Normally Closed or Last Position
- Advanced Hydro-Efficient Globe Design
  - Unobstructed flow path
  - Single moving part
  - High flow capacity
- Fully Supported & Balanced Diaphragm
  - Requires low opening and actuation pressure
  - Excellent low flow regulation performances
  - Progressively restrains valve closing
  - Prevents diaphragm distortion
- User-Friendly Design
  - Easy pressure setting
  - Simple in-line inspection and service


### Typical Applications

- Pressure Reducing Systems
- Pressure Zone Isolation
- Flow and Leakage Reduction
- Systems Subject to Varying Supply Pressure
- Energy Saving Irrigation Systems
- Source and "On Duty" Valves Management
- Downhill Supply Lines

### Operation:

The Shuttle Valve [1] hydraulically connects the Solenoid [2] or the Pressure Reducing Pilot (PRP) [3] to the Valve Control Chamber [4]. When solenoid is energized, PRP commands the valve to throttle closed should Downstream Pressure [P2] rise above setting, and to open when [P2] falls below setting. Should line pressure remain below setting - the valve opens fully. In response to an electric signal, the solenoid switches, directing line pressure through the shuttle valve into the control chamber. This causes the valve to shut.





## Technical Data

**Pressure Rating:**

250 psi

**Operating Pressure Range:**

7-250 psi

**Materials**
**Body & Cover:**

Cast iron (up to 8") Ductile iron (10" &amp; 12")

**Diaphragm:**

NR, Nylon fabric reinforced

**Spring:**

Stainless Steel

\*Other materials are available on request

**Control Loop Accessories**
**PR Pilot:** PC-SHARP-X-MP

**Pilot Spring Range:**

Spring	Spring Color	Setting range
K	Gray	7-43 psi
<b>N</b>	<b>Natural</b>	<b>12-95 psi</b>
V	Blue & White	15-150 psi
P	White	15-230 psi

Standard spring - marked in bold

**Tubing and Fittings:**

Reinforced Nylon and Brass

**AC solenoid:**

S-400-3W-PB




**DC latch solenoid:**

S-982-3W M.B.

\*For other solenoids and pilots please consult [BERMAD](#)

## Technical Specifications

For other end connection types,

 Please refer to [BERMAD](#) full engineering page.


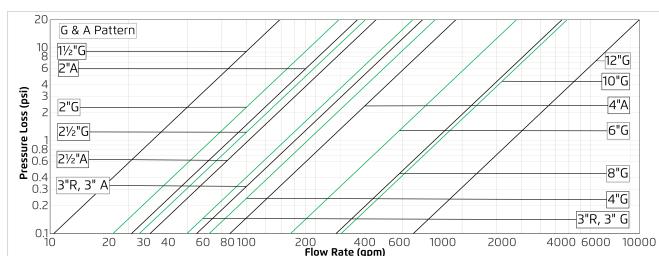
Size	Pattern	End Connection	Weight (Lb)	L (In)	H (In)	h (In)	W	CCDV (Gal)	CV
1" ; DN25	Globe	Threaded	2.4	4%	2 1/4	1%	2 1/2	0.005	15
1 1/2" ; DN40	Globe	Threaded	4.4	6 1/2	3 1/8	1 1/4	3 1/2	0.016	33
2" ; DN50	Globe	Threaded	8.8	7 1/8	4 1/2	1 1/2	4 1/4	0.03	66
2" ; DN50	Globe	Flanged	19.8	8 1/8	6 1/8	3 1/4	6 1/8	0.03	66
2" ; DN50	Globe	Grooved	11	8 1/8	4 1/4	1 1/4	4 1/4	0.03	66
2" ; DN50	Angle	Threaded	9.7	3 1/2	5 3/8	2 1/2	4 1/4	0.03	82
2" ; DN50	Angle	Flanged	19.8	4 1/4	7 1/8	3 3/8	6 1/8	0.03	82
2 1/2" ; DN65	Globe	Threaded	12.6	8 1/8	5 1/4	1 1/8	5 1/8	0.05	90
2 1/2" ; DN65	Globe	Flanged	23.1	8 1/8	7	3 1/2	7	0.05	90
2 1/2" ; DN65	Angle	Threaded	12.8	4 1/8	7 1/8	3 3/4	5 1/4	0.05	102
3R" ; DN80R	Globe	Threaded	12.9	8 1/8	5 1/2	2 1/8	5 1/8	0.08	157
3R" ; DN80R	Globe	Flanged	28	8 1/8	7 1/8	4	7 1/8	0.08	157
3R" ; DN80R	Angle	Threaded	15.4	4 1/8	7	3 3/8	5 1/4	0.08	176
3" ; DN80	Globe	Threaded	28.7	10 1/8	6 1/2	2 1/4	6 1/4	0.08	157
3" ; DN80	Globe	Flanged	41.9	9 1/8	8 1/4	4	7 1/8	0.08	157
3" ; DN80	Globe	Grooved	23.4	9 1/8	6 1/8	1 1/8	6 1/8	0.08	157
3" ; DN80	Angle	Threaded	24.3	4 1/8	7 1/8	3 1/4	6 1/4	0.08	176
3" ; DN80	Angle	Flanged	37.5	6 1/8	8 1/8	4	7 1/8	0.08	176
3" ; DN80	Angle	Grooved	22.1	4 1/8	11	3 3/8	6 1/4	0.08	176
4" ; DN100	Globe	Flanged	61.7	12 1/8	9 5/8	4 1/2	8 1/8	0.18	236
4" ; DN100	Globe	Grooved	35.7	12 1/8	7 1/8	2 1/2	8	0.18	236
4" ; DN100	Angle	Flanged	57.3	6 1/8	8 3/8	4 1/2	8 1/8	0.18	260
4" ; DN100	Angle	Grooved	35.3	6 1/8	8 3/8	4 1/2	8 1/8	0.18	260
6" ; DN150	Globe	Flanged	149.9	16 1/8	13 1/8	5 1/2	12 1/8	0.52	529
6" ; DN150	Globe	Grooved	108	16 1/8	11 1/8	3 3/8	12 1/8	0.52	529
8" ; DN200	Globe	Flanged	275.6	19 1/8	17	6 1/4	14 1/8	1.02	902
10" ; DN250	Globe	Flanged	308.6	23 1/8	18 1/8	8	16	1.02	957
12" ; DN300	Globe	Flanged	639.3	28 1/8	25	9 1/8	22 1/8	3.63	2231

CCDV = Control Chamber Displacement Volume • Threaded = BSP &amp; NPT are available.

## Additional Features

Code	Description	Size Range
F	Large Control Filter	1 1/2" - 12"
I	Position Indicator Assembly	1 1/2" - 12"
M	Flow Stem	1 1/2" - 12"

## Flow Chart



## Differential Pressure & Flow Calculation

$$\Delta P = \left( \frac{Q}{Cv} \right)^2 \quad Cv = \text{gpm} @ \Delta P \text{ of 1 psi}$$

$$Q = \text{gpm}$$

$$\Delta P = \text{psi}$$