




PRESSURE REDUCING & SUSTAINING VALVE

Model IR-423-50-2W-R

The BERMAD Pressure Reducing and Sustaining Valve with Remote Hydraulic Control is a hydraulically operated, diaphragm actuated control valve with three independent functions. It sustains minimum preset upstream pressure, prevents downstream pressure from rising above maximum preset and it either opens or shuts in response to a remote pressure command.

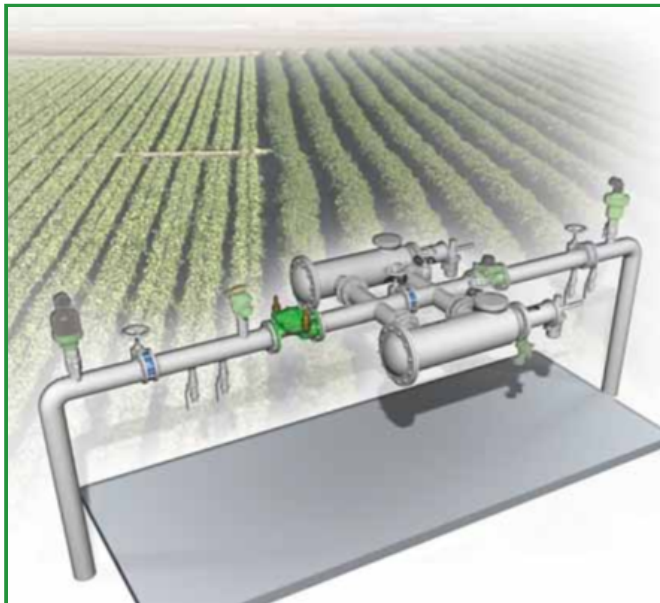

[1] BERMAD Model IR-423-50-2W-R opens upon pressure drop command, sustains filter back flush pressure and reduces system pressure.

Features & Benefits


- Hydraulic Pressure Control
 - Line pressure driven
 - Sustains upstream line pressure
 - Controls system fill-up
 - Protects downstream systems
 - Hydraulically controlled On/Off
- Advanced Hydro-Efficient Globe Design
 - Unobstructed flow path
 - Single moving part
 - High flow capacity
- Fully Supported & Balanced Diaphragm
 - Requires low opening and actuation pressure
 - Excellent low flow regulation performances
 - Progressively restrains valve closing
 - Prevents diaphragm distortion
- Simple In-Line Inspection and Service

Typical Applications

- Automated Irrigation Systems
- Line Fill-Up Control
- Line Emptying Prevention
- Pressure Reducing Systems
- Irrigation Machines
- Distribution Centers
- Low Supplied Pressure Irrigation Systems

Operation:

The Pressure Sustaining Pilot (PSP) [1] commands the Valve to throttle closed should Upstream Pressure [P1] drop below pilot setting, and to modulate open when it rises above settings. When [P1] is high, the Pressure Reducing Pilot (PRP) [2] commands the Valve to prevent Downstream Pressure [P2] from rising above pilot setting. The Hydraulic Relay Valve [3] closes upon pressure rise command, shutting the main Valve. The downstream Cock Valve [4] enables manual closing.





Technical Data

Pressure Rating:
250 psi

Operating Pressure Range:
7-250 psi

Materials

Body & Cover:
Cast iron (up to 8") Ductile iron (10" & 12")

Diaphragm:
NR, Nylon fabric reinforced

Spring:
Stainless Steel

**Other materials are available on request*

Control Loop Accessories

PR Pilot: PC-20-A-MP

PS Pilot: PC-30-A-MP

Pilot Spring Range:

Spring	Spring Color	Setting range
N	Natural	12-95 psi
V	Blue & White	15-150 psi

Standard spring - marked in bold

Tubing and Fittings:


Reinforced Nylon and Brass

**Pilots PC-20-A-MP ; PC-30-A-MP for sizes up to 4"*

**Pilots 2PBL ; 3PBL for sizes 6"-12"*

Technical Specifications


For other end connection types,
Please refer to [BERMAD](#) full engineering page.

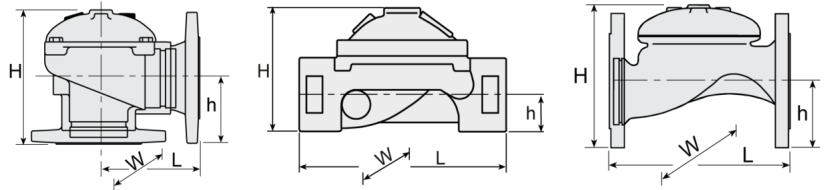

Size	Pattern	End Connection	Weight (Lb)	L (in)	H (in)	h (in)	W	CCDV (Gal)	CV
1" ; DN25	Globe	Threaded	2.4	4%	2 3/4	1 3/8	2 7/8	0.005	15
1 1/2" ; DN40	Globe	Threaded	4.4	6%	3%	1 1/4	3%	0.016	33
2" ; DN50	Globe	Threaded	8.8	7%	4 1/2	1 1/2	4%	0.03	66
2" ; DN50	Globe	Flanged	19.8	8%	6%	3%	6%	0.03	66
2" ; DN50	Globe	Grooved	11	8%	4%	1 1/4	4%	0.03	66
2" ; DN50	Angle	Threaded	9.7	3 1/2	5%	2 1/2	4%	0.03	82
2" ; DN50	Angle	Flanged	19.8	4%	7%	3%	6%	0.03	82
2 1/2" ; DN65	Globe	Threaded	12.6	8%	5%	1%	5%	0.05	90
2 1/2" ; DN65	Globe	Flanged	23.1	8%	7	3 1/2	7	0.05	90
2 1/2" ; DN65	Angle	Threaded	12.8	4%	7%	3%	5%	0.05	102
3R" ; DN80R	Globe	Threaded	12.9	8%	5 1/2	2%	5%	0.08	157
3R" ; DN80R	Globe	Flanged	28	8%	7%	4	7%	0.08	157
3R" ; DN80R	Angle	Threaded	15.4	4%	7	3%	5%	0.08	176
3" ; DN80	Globe	Threaded	28.7	10%	6 1/2	2 1/4	6%	0.08	157
3" ; DN80	Globe	Flanged	41.9	9%	8 1/4	4	7%	0.08	157
3" ; DN80	Globe	Grooved	23.4	9%	6%	1%	6%	0.08	157
3" ; DN80	Angle	Threaded	24.3	4%	7 1/4	3 1/4	6%	0.08	176
3" ; DN80	Angle	Flanged	37.5	6%	8%	4	7%	0.08	176
3" ; DN80	Angle	Grooved	22.1	4%	11	3%	6%	0.08	176
4" ; DN100	Globe	Flanged	61.7	12%	9%	4 1/2	8%	0.18	236
4" ; DN100	Globe	Grooved	35.7	12%	7%	2 1/2	8	0.18	236
4" ; DN100	Angle	Flanged	57.3	6%	8 3/4	4 1/2	8%	0.18	260
4" ; DN100	Angle	Grooved	35.3	6%	8 3/4	4 1/2	8%	0.18	260
6" ; DN150	Globe	Flanged	149.9	16%	13%	5 1/2	12%	0.52	529
6" ; DN150	Globe	Grooved	108	16%	11%	3%	12%	0.52	529
8" ; DN200	Globe	Flanged	275.6	19%	17	6%	14%	1.02	902
10" ; DN250	Globe	Flanged	308.6	23%	18%	8	16	1.02	957
12" ; DN300	Globe	Flanged	639.3	28%	25	9%	22%	3.63	2231

CCDV = Control Chamber Displacement Volume • Threaded = BSP & NPT are available.

Flow Chart

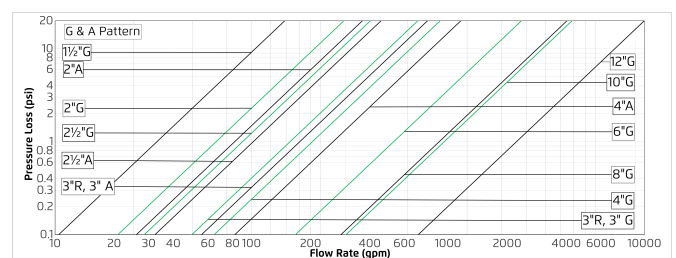

2-Way circuit "Added Head Loss" (for "V" below 6.5 f/s): 4.5 psi

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{C_v} \right)^2$$

Cv = gpm @ ΔP of 1 psi
Q = gpm
ΔP = psi