



PRESSURE SUSTAINING VALVE

Model IR-430-3W-RXZ

The BERMAD Pressure Sustaining Valve is a hydraulically operated, diaphragm actuated control valve that sustains minimum preset upstream (back) pressure and opens fully when line pressure is in excess of setting.



- [1]** BERMAD Model IR-430-3W-RXZ sustains supply system pressure preventing emptying, and controls laterals and distribution line fill-up.
- [2]** On/Off Valve Model IR-405-KZ
- [3]** Kinetic Air Valve Model K10

Features & Benefits


- Line Pressure Driven, Hydraulically Controlled
 - Prioritizes pressure zones
 - Controls system fill-up
 - Opens fully upon line pressure rise
- Metal Control Accessories
 - Damage resistant
 - High pressure rating
- Advanced Hydro-Efficient Globe Design
 - Unobstructed flow path
 - Single moving part
 - High flow capacity
- Fully Supported & Balanced Diaphragm
 - Requires low actuation pressure
 - Excellent low flow regulation performances
 - Progressively restrains valve closing
 - Prevents diaphragm distortion
- Simple In-Line Inspection and Service

Typical Applications

- Line Fill-Up Control Solutions
- Line Emptying Prevention
- Infield Filters Backwash Pressure Sustaining
- Systems Subject to Varying Supply Pressure

Operation:

The Pressure Sustaining Pilot **[1]** commands the main Valve to throttle closed should Upstream Pressure **[P1]** drop below setting, and to open fully when **[P1]** rises above setting. The Manual Selector **[2]** enables local manual closing.





Technical Data

Pressure Rating:

16 bar

Operating Pressure Range:

0.5-16 bar

Materials

Body & Cover:

Cast iron (up to 8") Ductile iron (10" & 12")

Diaphragm:

NR, Nylon fabric reinforced

Spring:

Stainless Steel

**Other materials are available on request*

Control Loop Accessories

PS Pilot: PC-SHARP-X-MP

Pilot Spring Range:

Spring	Spring Color	Setting range
K	Gray	0.5-3.0 bar
N	Natural	0.8-6.5 bar
V	Blue & White	1.0-10.0 bar
P	White	1.0-16.0 bar

Standard spring - marked in bold

Tubing and Fittings:


Reinforced Nylon and Brass

**For other pilots please consult [BERMAD](#)*

Technical Specifications

For other end connection types,

Please refer to [BERMAD](#) full engineering page.

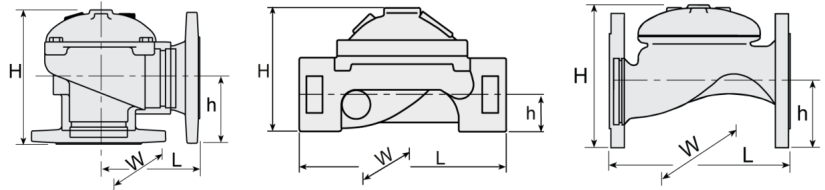


Size	Pattern	End Connection	Weight (Kg)	L (mm)	H (mm)	h (mm)	W	CCDV (Lit)	KV
1" ; DN25	Globe	Threaded	1.1	115	68	34	71	0.02	13
1½" ; DN40	Globe	Threaded	2	153	87	29	98	0.06	29
2" ; DN50	Globe	Threaded	4	180	114	39	119	0.113	57
2" ; DN50	Globe	Flanged	9	205	155	78	155	0.113	57
2" ; DN50	Globe	Grooved	5	205	108	31	119	0.113	57
2" ; DN50	Angle	Threaded	4.4	86	136	61	119	0.113	71
2" ; DN50	Angle	Flanged	9	120	160	83	155	0.113	71
2½" ; DN65	Globe	Threaded	5.7	210	132	45	129	0.179	78
2½" ; DN65	Globe	Flanged	10.5	205	178	89	178	0.179	78
2½" ; DN65	Angle	Threaded	5.8	110	180	93	131	0.179	88
3R" ; DN80R	Globe	Threaded	5.8	210	140	53	129	0.291	136
3R" ; DN80R	Globe	Flanged	12.1	210	200	100	200	0.291	136
3R" ; DN80R	Angle	Threaded	7	110	178	91	131	0.291	152
3" ; DN80	Globe	Threaded	13	255	165	55	170	0.291	136
3" ; DN80	Globe	Flanged	19	250	210	100	200	0.291	136
3" ; DN80	Globe	Grooved	10.6	250	155	46	170	0.291	136
3" ; DN80	Angle	Threaded	11	110	184	80	170	0.291	152
3" ; DN80	Angle	Flanged	17	153	205	101	200	0.291	152
3" ; DN80	Angle	Grooved	10	120	194	90	170	0.291	152
4" ; DN100	Globe	Flanged	28	320	242	112	223	0.668	204
4" ; DN100	Globe	Grooved	16.2	320	191	61	204	0.668	204
4" ; DN100	Angle	Flanged	26	160	223	112	223	0.668	225
4" ; DN100	Angle	Grooved	16	160	223	112	204	0.668	225
6" ; DN150	Globe	Flanged	68	415	345	140	306	1.973	458
6" ; DN150	Globe	Grooved	49	415	302	85	306	1.973	458
8" ; DN200	Globe	Flanged	125	500	430	170	365	3.858	781
10" ; DN250	Globe	Flanged	140	605	460	202	405	3.858	829
12" ; DN300	Globe	Flanged	290	725	635	242	580	13.75	1932

CCDV = Control Chamber Displacement Volume • Threaded = BSP & NPT are available.

Additional Features

Code	Description	Size Range
F	Large Control Filter	1½"-12" / DN40-300
I	Position Indicator Assembly	1½"-12" / DN40-300
M	Flow Stem	1½"-12" / DN40-300

Flow Chart

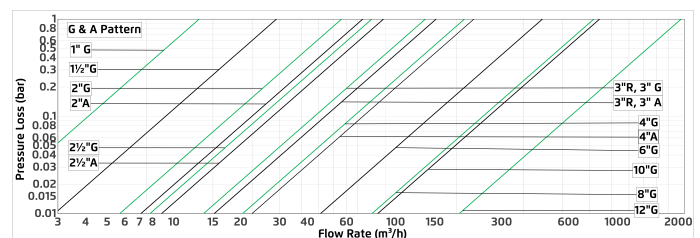

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{K_v} \right)^2$$

$K_v = m^3/h$ @ ΔP of 1 bar

$Q = m^3/h$

$\Delta P = \text{bar}$