




QUICK PRESSURE RELIEF VALVE

Model IR-43Q-2W-R

The BERMAD Quick Pressure Relief Valve is a hydraulically operated, diaphragm actuated control valve that relieves excessive line pressure when it rises above the preset maximum. It responds to a rise in system pressure immediately, accurately and with high repeatability, by opening fully and provides smooth drip tight closing.

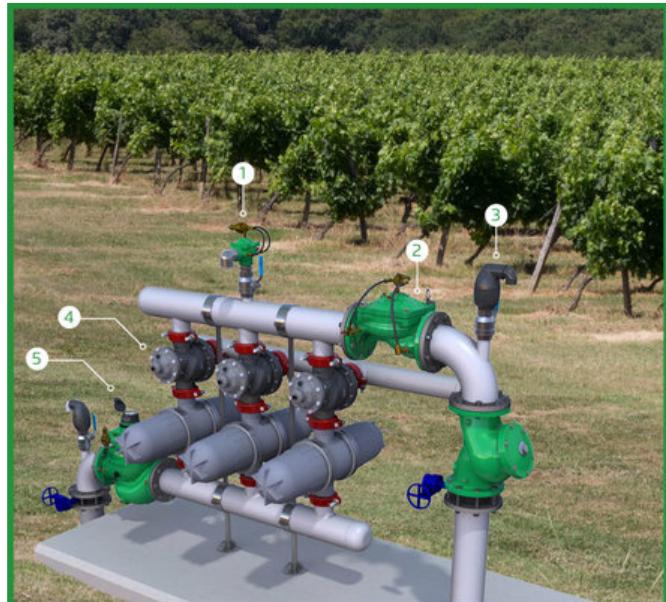

- [1] BERMAD Model IR-43Q-2W-R protects system from pressure spikes.
- [2] Pressure Reducing Valve Model IR-420-2W-R
- [3] Combination Air Valve Model IR-C30
- [4] Filter Backwash Hydraulic Valve Model IR-350
- [5] Flow Control Hydrometer Model IR-970-M0-R Magnetic Drive

Features & Benefits


- Hydraulic Pressure Control
 - Line pressure driven
 - Long term drip tight sealing
 - Long term setting stability
 - Wide setting range
 - Tight setting window with minimal hysteresis
- Advanced Hydro-Efficient Globe Design
 - Unobstructed flow path
 - Single moving part
 - High flow capacity
- Fully Supported & Balanced Diaphragm
 - Requires low opening and actuation pressure
 - Progressively restrains valve closing
 - Prevents diaphragm distortion
- User-Friendly Design
 - Easy pressure setting
 - Simple in-line inspection and service


Typical Applications

- System Burst Protection
- Momentary Pressure Peak Elimination
- System Failure Visual Indication
- Filter Burst Protection

Operation:

The Pressure Relief Pilot [1] commands the valve to open immediately should the Upstream Pressure [P1] abruptly rise above setting, and to close smoothly when it falls below setting. The Vented Cock Valve [2] enables manual operating tests.

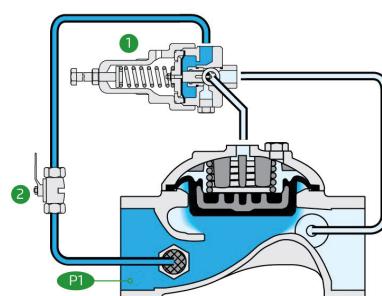



Technical Data

Pressure Rating:
250 psi

Operating Pressure Range:
7-250 psi

Materials

Body & Cover:
Cast iron (up to 8") Ductile iron (10" & 12")

Diaphragm:
NR, Nylon fabric reinforced

Spring:
Stainless Steel

**Other materials are available on request*

Control Loop Accessories

PS Pilot: PC-3Q-A-MP

Pilot Spring Range:

Spring	Spring Color	Setting range
V	Blue & White	15-150 psi
P	White	15-230 psi


Standard spring - marked in bold

Tubing and Fittings:

Reinforced Nylon and Brass

Technical Specifications

For other end connection types,
Please refer to [BERMAD](#) full engineering page.

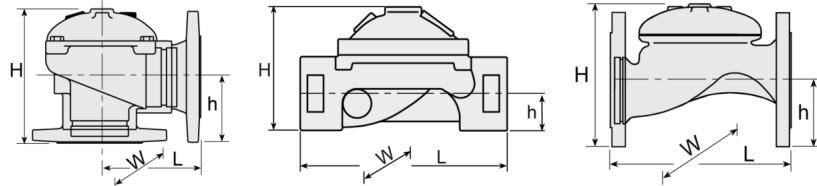


Size	Pattern	End Connection	Weight (Lb)	L (In)	H (In)	h (In)	W	CCDV (Gal)	CV
1" ; DN25	Globe	Threaded	2.4	4%	2 1/4	1%	2 1/2	0.005	15
1 1/2" ; DN40	Globe	Threaded	4.4	6 1/2	3 1/2	1 1/4	3 1/2	0.016	33
2" ; DN50	Globe	Threaded	8.8	7 1/2	4 1/2	1 1/2	4 1/2	0.03	66
2" ; DN50	Globe	Flanged	19.8	8 1/2	6 1/2	3 1/4	6 1/2	0.03	66
2" ; DN50	Globe	Grooved	11	8 1/2	4 1/4	1 1/4	4 1/4	0.03	66
2" ; DN50	Angle	Threaded	9.7	3 1/2	5 3/8	2 1/2	4 1/2	0.03	82
2" ; DN50	Angle	Flanged	19.8	4 1/4	7 1/8	3 3/8	6 1/2	0.03	82
2 1/2" ; DN65	Globe	Threaded	12.6	8 1/2	5 1/4	1 1/8	5 1/2	0.05	90
2 1/2" ; DN65	Globe	Flanged	23.1	8 1/2	7	3 1/2	7	0.05	90
2 1/2" ; DN65	Angle	Threaded	12.8	4 1/2	7 1/8	3 3/4	5 1/4	0.05	102
3R" ; DN80R	Globe	Threaded	12.9	8 1/2	5 1/2	2 1/2	5 1/2	0.08	157
3R" ; DN80R	Globe	Flanged	28	8 1/2	7 1/8	4	7 1/8	0.08	157
3R" ; DN80R	Angle	Threaded	15.4	4 1/2	7	3 3/8	5 1/4	0.08	176
3" ; DN80	Globe	Threaded	28.7	10 1/2	6 1/2	2 1/4	6 1/2	0.08	157
3" ; DN80	Globe	Flanged	41.9	9 1/2	8 1/4	4	7 1/8	0.08	157
3" ; DN80	Globe	Grooved	23.4	9 1/2	6 1/8	1 1/8	6 1/4	0.08	157
3" ; DN80	Angle	Threaded	24.3	4 1/2	7 1/4	3 1/4	6 1/4	0.08	176
3" ; DN80	Angle	Flanged	37.5	6 1/2	8 1/8	4	7 1/8	0.08	176
3" ; DN80	Angle	Grooved	22.1	4 1/4	11	3 3/8	6 1/4	0.08	176
4" ; DN100	Globe	Flanged	61.7	12 1/2	9 5/8	4 1/2	8 1/2	0.18	236
4" ; DN100	Globe	Grooved	35.7	12 1/2	7 1/8	2 1/2	8	0.18	236
4" ; DN100	Angle	Flanged	57.3	6 1/2	8 3/4	4 1/2	8 1/2	0.18	260
4" ; DN100	Angle	Grooved	35.3	6 1/2	8 3/4	4 1/2	8 1/2	0.18	260
6" ; DN150	Globe	Flanged	149.9	16 1/2	13 1/8	5 1/2	12 1/2	0.52	529
6" ; DN150	Globe	Grooved	108	16 1/2	11 1/8	3 3/8	12 1/2	0.52	529
8" ; DN200	Globe	Flanged	275.6	19 1/4	17	6 1/4	14 1/4	1.02	902
10" ; DN250	Globe	Flanged	308.6	23 1/8	18 1/8	8	16	1.02	957
12" ; DN300	Globe	Flanged	639.3	28 1/8	25	9 1/8	22 1/8	3.63	2231

CCDV = Control Chamber Displacement Volume • Threaded = BSP & NPT are available.

Additional Features

Code	Description	Size Range
F	Large Control Filter	1 1/2" - 12"
I	Position Indicator Assembly	1 1/2" - 12"

Flow Chart

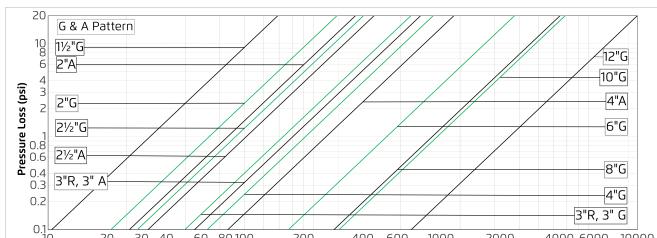

2-Way circuit "Added Head Loss" (for "V" below 6.5 f/s): 4.5 psi

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{Cv} \right)^2$$

Cv = gpm @ ΔP of 1 psi

Q = gpm

ΔP = psi



www.bermad.com

The information contained herein may be changed by BERMAD without notice. BERMAD shall not be held liable for any errors.
© Copyright 2015-2025 BERMAD CS Ltd

January 2026