

SOLENOID CONTROLLED HYDROMETER

Model IR-910-M0-3W-KX

The BERMAD Hydrometer with solenoid control combines a turbine Woltman-type water meter and a hydraulically operated, diaphragm-actuated control valve. It functions as both a mainline flow meter and a solenoid-operated valve, opening and closing in response to an electric command from a control system. The Hydrometer features a magnetically coupled, vacuum-sealed register for precise volume measurement. An optional pulse output enhances system capabilities.



- [1] BERMAD IR-910-M0-3W-KX On/Off hydrometers are controlled and transmit flow data by one Omega controller.
- [2] Combination Air Valve Model C10
- [3] Pressure Reducing Valve Model IR-420-55-KX
- [4] Smart Irrigation Controller-OMEGA
- [5] Kinetic Air Valve Model K10

Features & Benefits


- Integrated "All-in-One" Control Valve & Flow Meter
 - Saves space, cost and maintenance
- Hydraulic Hydrometer with Solenoid Control
 - Line pressure driven
 - Electrically controlled On/Off
- Magnetic Drive with Vacuum-Sealed Register
 - Water-free gear train mechanism
 - Reed-switch tension free pulse output
 - Various pulse combinations
- Internal Inlet & Outlet Flow Straighteners
 - Saves on straightening distances
 - Maintains accuracy
- Integrated Flow Metering Calibration Device
 - Precise measurement

Typical Applications

- Automated Irrigation Systems
- Remote and/or Elevated Systems
- Remote Flow Data Read-Out
- Flow Monitoring & Leakage Control

Operation:

Line pressure [1] is applied to the Control Chamber [2] through the 3-Way Normally Open Solenoid [3], generating a hydraulic force that moves the Diaphragm Assembly [4] to the closed position. When the solenoid is electrically activated, it switches to release pressure from the control chamber, allowing the Hydrometer to open and measure flow. The solenoid also features a manual override for opening and closing.





Technical Data

Pressure Rating:

150 psi

Operating Pressure Range:

7-150 psi

Materials

Body & Cover: Ductile Iron

Diaphragm: NR, Nylon fabric reinforced

Seals: NR, Nylon fabric reinforced

Spring: Stainless Steel

Internals: Stainless Steel & Plastic Reinforced Nylon

Impeller: Polypropylene

Pivots and Bearings:

Polypropylene

**Other materials are available on request*

Control Loop Accessories

Tubing and Fittings:

Polyethylene and Polypropylene

AC solenoid:

S-390-T-3W

DC latch solenoid:


S-392-T-3W P.B

S-982-3W P.B.

**For other solenoids please consult [BERMAD](#)*

Technical Specifications

For other patterns and end connection types,
Please refer to [BERMAD](#) full engineering page.

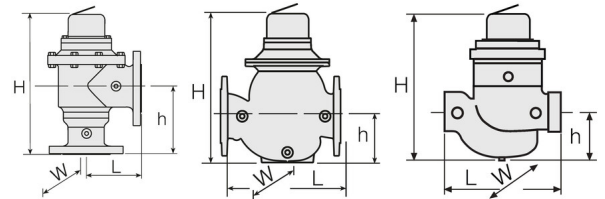

Size	Pattern	End Connection	Weight (Lb)	L (In)	H (In)	h (In)	W	CCDV (Gal)	CV
1½" ; DN40	Globe	Threaded	15.9	9¾	10¾	3¾	5¾	0.04	47
2" ; DN50	Globe	Threaded	16.1	9¾	10¾	3¾	5¾	0.04	53
2" ; DN50	Angle 90°	Threaded	17.8	4¾	13¾	6¾	5¾	0.04	59
3"R ; DN80R	Globe	Threaded	16.1	9¾	10¾	3¾	5¾	0.04	58
3"R ; DN80R	Globe	Flanged	35.3	12¾	11¾	4	7¾	0.04	58
3" ; DN80	Globe	Flanged	50.7	11¾	15	4¾	8¾	0.13	133
3" ; DN80	Angle 90°	Flanged	56.9	6	15¾	7¾	8¾	0.13	146
4" ; DN100	Globe	Flanged	68.3	13¾	17¾	5¾	9¾	0.26	170
4" ; DN100	Angle 90°	Flanged	79.6	7¾	19	8¾	9¾	0.26	208

CCDV = Control Chamber Displacement Volume • **Threaded** = BSP & NPT are available.

• Extra length for male Threaded: 1½" Globe= 2.6 (Inch) ; 2" Globe & Angle= 3 (Inch)

Flow Properties

Size Q @ (gpm)	Accuracy	DN40 1½"	DN50 2"	DN80R 3"R	DN80 3"	DN100 4"
Q1 Minimum Flow	±5%	3.5	3.5	5.3	5.3	7.9
Q2 Transitional Flow	±2%	5.7	5.7	13.2	13.2	19.8
Q3 Permanent Flow	±2%	110	176	440	440	704
Q4 Maximum Flow (Short Time)	±2%	136	220	550	550	880

*ISO 4604

Pulse Option


Register Type	Electronic			
Size	One pulse per			
	1 Gal	10 Gal	100 Gal	1000 Gal
1½"-4" ; DN40-100	✓	✓	✓	

- 1 Gallon pulse (only available with electronic register) suitable for flows up to 790 gpm.
- Two parallel pulses are transmitted. other pulse rates are available on request.

Additional Features

Code	Description
Z	Manual Selector
ME	Electronic register (upgrade kit is available)

Flow Chart

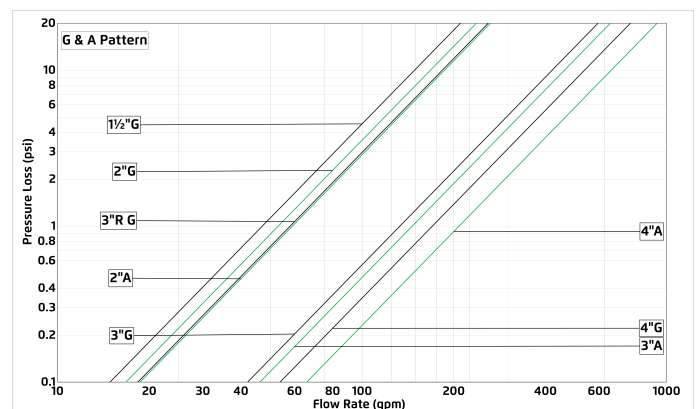

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{Cv} \right)^2$$

Cv = gpm @ ΔP of 1 psi

Q = gpm

ΔP = psi