


SOLENOID CONTROLLED HYDROMETER

Model IR-910-ME-3W-RX

The BERMAD Hydrometer with solenoid control combines a turbine Woltman-type water meter and a hydraulically operated, diaphragm-actuated control valve. It functions as both a mainline flow meter and a solenoid-operated valve, opening and closing in response to an electric command from a control system. The Hydrometer features a magnetically coupled, vacuum-sealed electronic register for precise volume and flow measurement, and includes a pulse output for enhanced monitoring and control.

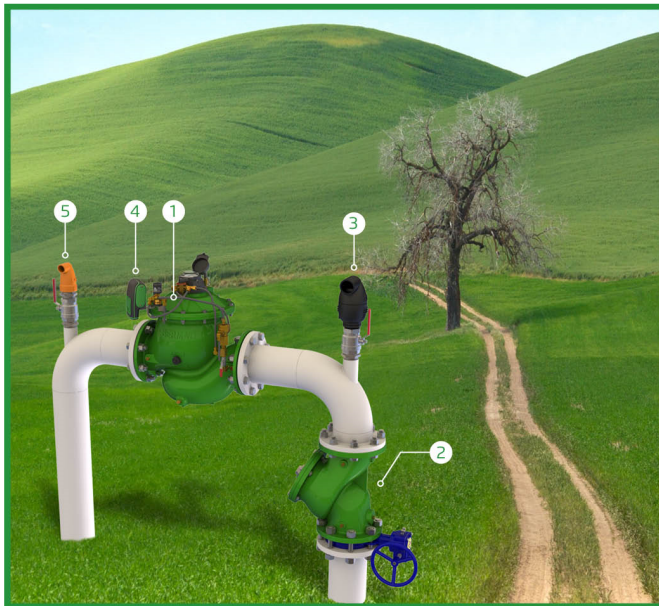

- [1] BERMAD Model IR-910-ME-3W-RX opens in response to an electric signal.
- [2] Strainer Model 70-F
- [3] Combination Air Valve Model C10
- [4] Smart Irrigation Controller-OMEGA
- [5] Kinetic Air Valve Model K10

Features & Benefits

- Integrated "All-in-One" Control Valve & Flow Meter
 - Saves space, cost and maintenance
- Hydraulic Hydrometer with Solenoid Control
 - Line pressure driven
 - Electrically controlled On/Off
- Magnetic Drive with BERMAD Universal E-Register
 - Support metric & imperial units of measurement
 - Instant flow rate display
 - Forward and reverse flow indication
 - Data logging capabilities
 - Fast pulse output rate
- Internal Inlet & Outlet Flow Straighteners
 - Saves on straightening distances
 - Maintains accuracy
- User-Friendly Design
 - Simple in-line inspection and service


Typical Applications

- Automated Irrigation Systems
- Distribution Centers
- Remote Systems
- Remote Flow Data Read-Out
- Flow Monitoring & Leakage Control
- Irrigation Machines

Operation:

Line pressure [1] is applied to the Control Chamber [2] through the 3-Way Normally Open Solenoid [3], generating a hydraulic force that moves the Diaphragm Assembly [4] to the closed position. When the solenoid is electrically activated, it switches to release pressure from the control chamber, allowing the Hydrometer to open and measure flow. The solenoid also features a manual override for opening and closing.

For Hydrometers with diameters of 6"-10" (DN150-250), a 3-Way Hydraulic Relay Valve (3W-HRV) [5] accelerates Hydrometer response.

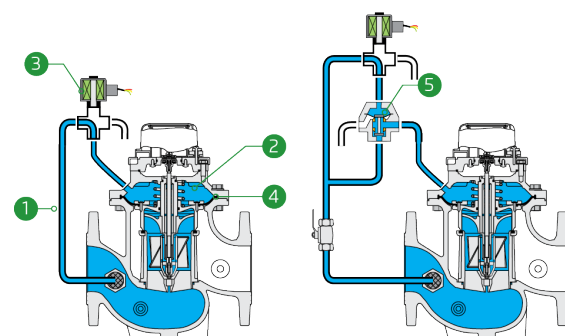



Technical Data

Pressure Rating:

16 bar

Operating Pressure Range:

0.5-16 bar

Materials

Body & Cover: Ductile Iron

Diaphragm: NR, Nylon fabric reinforced

Seals: NR, Nylon fabric reinforced

Spring: Stainless Steel

Internals: Stainless Steel & Plastic Reinforced Nylon

Impeller: Polypropylene

Pivots and Bearings:

Polypropylene

**Other materials are available on request*

Control Loop Accessories

Tubing and Fittings:

Reinforced Nylon and Brass

**For other solenoids please consult [BERMAD](#)*

AC solenoid:

S-400-3W

DC solenoid:

S-400-3W

DC latch solenoid:


S-402-3W M.B.

S-982-3W M.B.

Technical Specifications

For other patterns and end connection types,

Please refer to [BERMAD](#) full engineering page.

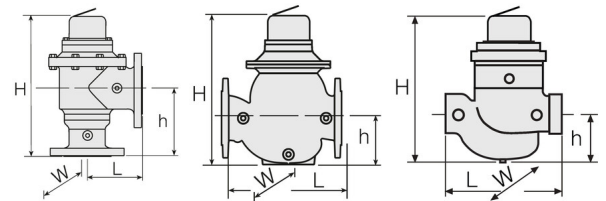

Size	Pattern	End Connection	Weight (Kg)	L (mm)	H (mm)	h (mm)	W	CCDV (Lit)	KV
1½" ; DN40	Globe	Threaded	7.2	250	270	95	143	0.16	41
2" ; DN50	Globe	Threaded	7.3	250	277	95	143	0.16	46
2" ; DN50	Angle 90°	Threaded	8.1	120	353	155	143	0.16	51
3"R ; DN80R	Globe	Threaded	7.3	250	277	79	143	0.16	50
3"R ; DN80R	Globe	Flanged	16	310	298	100	200	0.16	50
3" ; DN80	Globe	Flanged	23	300	382	123	210	0.49	115
3" ; DN80	Angle 90°	Flanged	25.8	150	402	196	210	0.49	126
4" ; DN100	Globe	Flanged	31	350	447	137	250	1	147
4" ; DN100	Angle 90°	Flanged	36.1	180	481	225	250	1	180
6" ; DN150	Globe	Flanged	71	500	602	216	380	3.8	430
6" ; DN150	Angle 90°	Flanged	76.7	250	585	306	380	3.8	473
8" ; DN200	Globe	Flanged	93	600	617	228	380	3.8	550
8" ; DN200	Angle 90°	Flanged	82.5	250	585	280	380	3.8	605
10" ; DN250	Globe	Flanged	140.5	600	617	228	405	3.8	550

CCDV = Control Chamber Displacement Volume • **Threaded** = BSP & NPT are available.

• Extra length for male Threaded: 1½" Globe = 67(mm) ; 2" Globe & Angle = 77(mm)

Flow Properties

Size	Accuracy	DN40	DN50	DN80R	DN80	DN100	DN150	DN200	DN250
Q @ (m³/h)		1½"	2"	3"R	3"	4"	6"	8"	10"
Q1 Minimum Flow	±5%	0.8	0.8	1.2	1.2	1.8	4	6.3	6.3
Q2 Transitional Flow	±2%	1.3	1.3	3	3	4.5	10	15.8	15.8
Q3 Permanent Flow	±2%	25	40	100	100	160	250	400	400
Q4 Maximum Flow (Short Time)	±2%	31	50	125	125	200	313	500	500

*ISO 4604

Pulse Option


Register Type	Electronic			
Size	One pulse per			
	10L	100L	1m³	10m³
1½"-4" ; DN40-100	✓	✓	✓	
6"-10" ; DN150-250		✓	✓	✓

• 10L pulse suitable for flows up to 180 m³/h.

Additional Features

Code	Description	Size Range
Z	Manual Selector	1½"-10" / DN40-250

Flow Chart

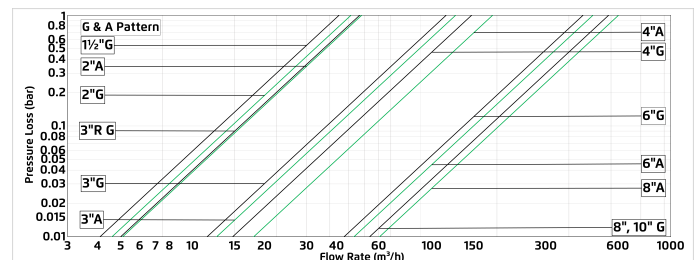

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{K_v} \right)^2$$

$K_v = m^3/h$ @ ΔP of 1 bar

$Q = m^3/h$

$\Delta P = \text{bar}$