

PRESSURE REDUCING HYDROMETER, SOLENOID CONTROLLED

Model IR-920-M0-55-3W-KX

The BERMAD pressure reducing Hydrometer with solenoid control combines a Woltman-type turbine water meter with a hydraulically operated, diaphragm-actuated control valve. It functions as both a mainline flow meter and a pressure-reducing valve, opening or shutting in response to an electric command and reducing higher upstream pressure to lower constant downstream pressure or opening fully when pressure drops below setpoint. It features a vacuum-sealed register for precise measurement of accumulated volume. An optional pulse output is available, further enhancing system capabilities.



[1] BERMAD Model IR-920-M0-55-KX opens or shuts in response to electric signal, establishes reduced pressure zone and controls irrigation shifts

Features & Benefits


- Integrated "All-in-One" Control Valve & Flow Meter
 - Saves space, cost and maintenance
- Line Pressure Driven, Electrically Controlled On/Off
 - Protects downstream systems
- Magnetic Drive with Vacuum-Sealed Register
 - Water-free gear train mechanism
 - Reed-switch tension free pulse output
 - Various pulse combinations
- Internal Inlet & Outlet Flow Straighteners
 - Saves on straightening distances
 - Maintains accuracy
- Integrated Flow Metering Calibration Device
 - Precise measurement
- User-Friendly Design
 - Easy pressure setting
 - Simple in-line inspection and service

Typical Applications

- Automated Irrigation Systems
- Remote Flow Data Read-Out
- Flow Monitoring & Leakage Control
- Pressure Reducing Systems
- Systems Subject to Varying Supply Pressure
- Distribution Centers

Operation:

When the Solenoid [1] is activated, the Shuttle Valve [2] hydraulically relays the Pressure Reducing Pilot (PRP) [3] to the Hydrometer's Control Chamber [4]. The PRP regulates the Hydrometer, throttling it closed if the downstream pressure [P2] rises above the setpoint and opening it fully when it drops below the setpoint. When the Solenoid is deactivated, the Shuttle Valve switches, directing command pressure into the control chamber, which closes the Hydrometer. The solenoid also features an opening and closing manual override.





Technical Data

Pressure Rating:

150 psi

Operating Pressure Range:

7-150 psi

Materials

Body & Cover: Ductile Iron

Diaphragm: NR, Nylon fabric reinforced

Seals: NR, Nylon fabric reinforced

Spring: Stainless Steel

Internals: Stainless Steel & Plastic Reinforced Nylon

Impeller: Polypropylene

Pivots and Bearings:

Polypropylene

**Other materials are available on request*

Control Loop Accessories

PR Pilot: PC-SHARP-X-P

Spring	Spring Color	Setting range
J	Green	3-25 bar
K	Gray	7-43 bar
N	Natural	12-95 psi
V	Blue & White	15-150 bar

Standard spring - marked in bold

Tubing and Fittings:

Polyethylene and Polypropylene

AC solenoid:

S-390-T-3W

DC solenoid:

S-390-T-3W

DC latch solenoid:


S-392-T-3W P.B

**For other solenoids and pilots please consult [BERMAD](#)*

Technical Specifications

For other patterns and end connection types,

Please refer to [BERMAD](#) full engineering page.

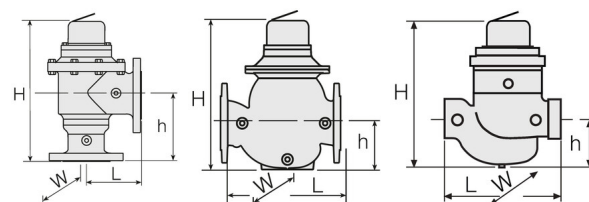

Size	Pattern	End Connection	Weight (Lb)	L (In)	H (In)	h (In)	W	CCDV (Gal)	CV
1½" ; DN40	Globe	Threaded	15.9	9%	10%	3%	5%	0.04	47
2" ; DN50	Globe	Threaded	16.1	9%	10%	3%	5%	0.04	53
2" ; DN50	Angle 90°	Threaded	17.8	4%	13%	6%	5%	0.04	59
3"R ; DN80R	Globe	Threaded	16.1	9%	10%	3%	5%	0.04	58
3"R ; DN80R	Globe	Flanged	35.3	12%	11%	4	7%	0.04	58
3" ; DN80	Globe	Flanged	50.7	11%	15	4%	8%	0.13	133
3" ; DN80	Angle 90°	Flanged	56.9	6	15%	7%	8%	0.13	146
4" ; DN100	Globe	Flanged	68.3	13%	17%	5%	9%	0.26	170
4" ; DN100	Angle 90°	Flanged	79.6	7%	19	8%	9%	0.26	208

CCDV = Control Chamber Displacement Volume • **Threaded** = BSP & NPT are available.

• Extra length for male Threaded: 1½" Globe= 2.6 (Inch) ; 2" Globe & Angle= 3 (Inch)

Flow Properties

Size	Accuracy	DN40	DN50	DN80R	DN80	DN100
Q @ (gpm)		1½"	2"	3"R	3"	4"
Q1 Minimum Flow	±5%	3.5	3.5	5.3	5.3	7.9
Q2 Transitional Flow	±2%	5.7	5.7	13.2	13.2	19.8
Q3 Permanent Flow	±2%	110	176	440	440	704
Q4 Maximum Flow (Short Time)	±2%	136	220	550	550	880

**ISO 4604*

Pulse Option


Register Type	Electronic			
Size	One pulse per			
	1 Gal	10 Gal	100 Gal	1000 Gal
1½"-4" ; DN40-100	✓	✓	✓	

- 1 Gallon pulse (only available with electronic register) suitable for flows up to 790 gpm.
- Two parallel pulses are transmitted. other pulse rates are available on request.

Additional Features

Code	Description
ME	Electronic register (upgrade kit is available)

Flow Chart

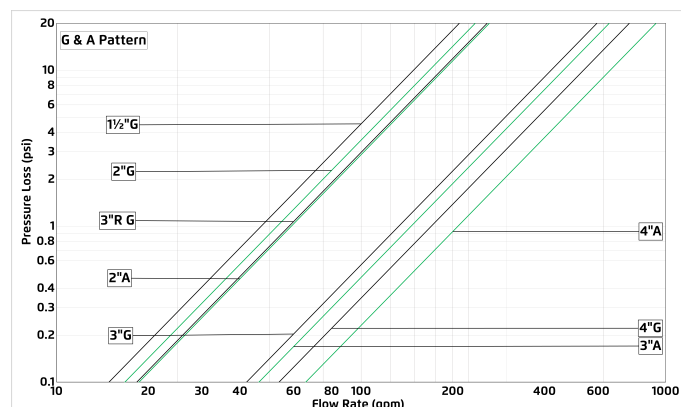

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{C_v} \right)^2$$

Cv = gpm @ ΔP of 1 psi

Q = gpm

ΔP = psi