




PRESSURE REDUCING HYDROMETER

Model IR-920-M0-2W-R

The BERMAD Pressure Reducing Hydrometer combines a Woltman-type turbine water meter and a hydraulically operated, diaphragm-actuated control valve. It functions as both a mainline flow meter and a pressure-reducing valve, reducing higher upstream pressure to a constant downstream pressure and modulating open if line pressure drops below the setting. The Hydrometer features a magnetically coupled, vacuum-sealed register for precise volume measurement. An optional pulse output enhances system capabilities.

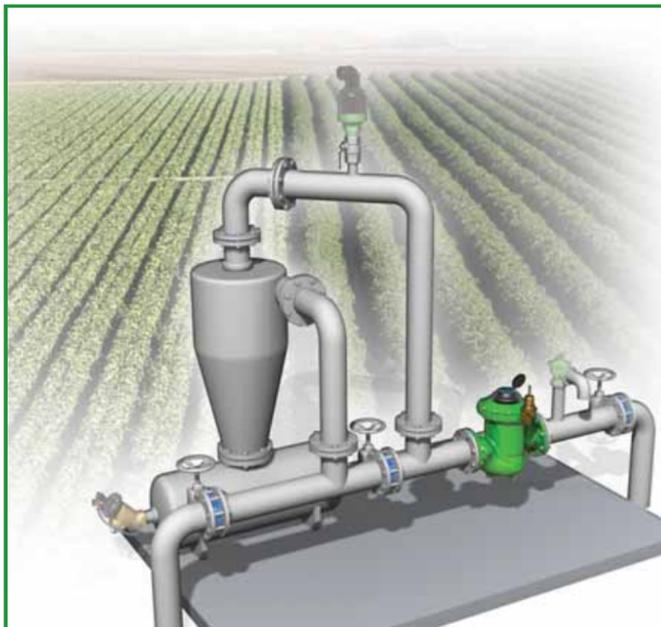

- [1] BERMAD Model IR-920-M0-2W-R protects the system measures the flow.
- [2] BERMAD Relief Valve Model IR-43Q-2W-R

Features & Benefits


- Integrated "All-in-One" Control Valve & Flow Meter
 - Saves space, cost and maintenance
- Hydraulic Pressure Control
 - Line pressure driven
 - Protects downstream
- Magnetic Drive with Vacuum-Sealed Register
 - Water-free gear train mechanism
 - Reed-switch tension free pulse output
 - Various pulse combinations
- Internal Inlet & Outlet Flow Straighteners
 - Saves on straightening distances
 - Maintains accuracy
- Integrated Flow Metering Calibration Device
 - Precise measurement
- User-Friendly Design
 - Easy pressure setting
 - Simple in-line inspection and service
 - Easy addition of control features

Typical Applications

- Automated Irrigation Systems
- Pressure Reducing Systems
- Remote Flow Data Read-Out
- Flow Monitoring & Leakage Control
- Volumetric Irrigation Systems

Operation:

The Pressure Reducing Pilot (PRP) [1] commands the Hydrometer to throttle-closed when Downstream Pressure [P2] rises above pilot setting, and to modulate open when it drops below pilot setting. The downstream Cock Valve [2] enables manual closing.





IR-920-M0-2W-R

Technical Data

Pressure Rating:
250 psi

Operating Pressure Range:
7-250 psi

Materials

- Body & Cover: Ductile Iron
 - Diaphragm: NR, Nylon fabric reinforced
 - Seals: NR, Nylon fabric reinforced
 - Spring: Stainless Steel
 - Internals: Stainless Steel & Plastic Reinforced Nylon
 - Impeller: Polypropylene
 - Pivots and Bearings: Polypropylene
- *Other materials are available on request*

Control Loop Accessories

PR Pilot: PC-20-A-MP


Spring	Spring Color	Setting range
N	Natural	12-95 psi
V	Blue & White	15-150 bar

Standard spring - marked in bold

Tubing and Fittings:
Reinforced Nylon and Brass

Technical Specifications

For other patterns and end connection types,
Please refer to [BERMAD](#) full engineering page.

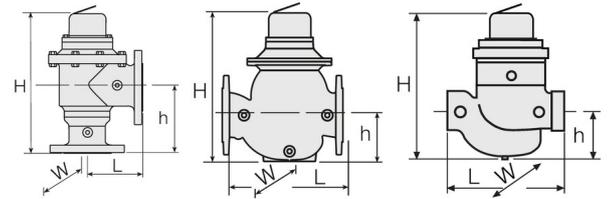

Size	Pattern	End Connection	Weight (Lb)	L (In)	H (In)	h (In)	W	CCDV (Gal)	CV
1½" ; DN40	Globe	Threaded	15.9	9%	10%	3¾	5%	0.04	47
2" ; DN50	Globe	Threaded	16.1	9%	10%	3¾	5%	0.04	53
2" ; DN50	Angle 90°	Threaded	17.8	4¾	13%	6%	5%	0.04	59
3"R ; DN80R	Globe	Threaded	16.1	9%	10%	3¾	5%	0.04	58
3"R ; DN80R	Globe	Flanged	35.3	12¾	11¾	4	7%	0.04	58
3" ; DN80	Globe	Flanged	50.7	11%	15	4¾	8¾	0.13	133
3" ; DN80	Angle 90°	Flanged	56.9	6	15%	7¾	8¾	0.13	146
4" ; DN100	Globe	Flanged	68.3	13¾	17%	5%	9%	0.26	170
4" ; DN100	Angle 90°	Flanged	79.6	7%	19	8%	9%	0.26	208
6" ; DN150	Globe	Flanged	156.5	19¾	23¾	8½	15	1	497
6" ; DN150	Angle 90°	Flanged	169.1	9%	23	12	15	1	547
8" ; DN200	Globe	Flanged	205	23%	24¾	9	15	1	636
8" ; DN200	Angle 90°	Flanged	181.8	9%	23	11	15	1	699

CCDV = Control Chamber Displacement Volume • **Threaded** = BSP & NPT are available.

• Extra length for male Threaded: 1½" Globe = 2.6 (Inch) ; 2" Globe & Angle = 3 (Inch)

Flow Properties

Size	Accuracy	DN40	DN50	DN80R	DN80	DN100	DN150	DN200
Q @ (gpm)		1½"	2"	3"R	3"	4"	6"	8"
Q1 Minimum Flow	±5%	3.5	3.5	5.3	5.3	7.9	17.6	27.7
Q2 Transitional Flow	±2%	5.7	5.7	13.2	13.2	19.8	44	69.6
Q3 Permanent Flow	±2%	110	176	440	440	704	1100	1761
Q4 Maximum Flow (Short Time)	±2%	136	220	550	550	880	1378	2201

*ISO 4604

Pulse Option

Register Type	Electronic			
	One pulse per			
Size	1 Gal	10 Gal	100 Gal	1000 Gal
1½"-4" ; DN40-100	✓	✓	✓	
6"-10" ; DN150-250		✓	✓	✓


- 1 Gallon pulse (only available with electronic register) suitable for flows up to 790 gpm.
- Two parallel pulses are transmitted. other pulse rates are available on request.

Additional Features

Code	Description
ME	Electronic register (upgrade kit is available)

Flow Chart

2-Way circuit "Added Head Loss" (for "V" below 6.5 f/s): 4.5 psi

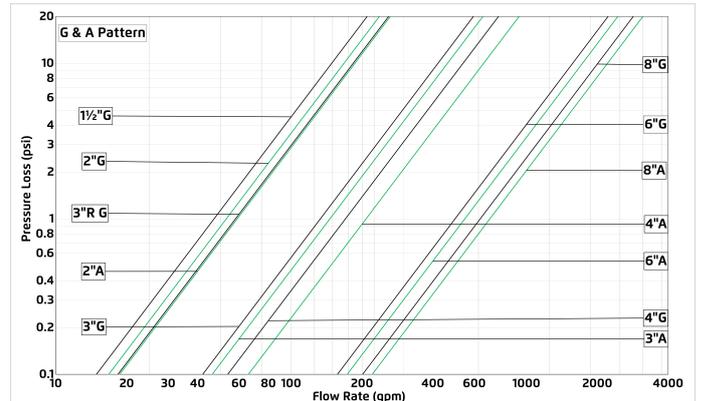

Differential Pressure & Flow Calculation

$$\Delta P = \left(\frac{Q}{Cv} \right)^2$$

Cv = gpm @ ΔP of 1 psi
 Q = gpm
 ΔP = psi