



COMBINATION AIR VALVE

Glass Reinforced Nylon, PN10 / 150 PSI

Model C10

BERMAD C10 is a high quality combination air valve for a variety of irrigation networks and operating conditions. It evacuates air during pipeline filling, allows efficient release of air pockets from pressurized pipes, and enables large volume air intake in the event of network draining.

Features & Benefits

- Straight flow body with nominal (equal) inlet and outlet size: Higher than usual flow rates.
- Dynamic Sealing: Prevents leakage under low pressure conditions (1.5 psi; 0.1 bar).
- Threaded Side outlet (2"; DN50) for connection of Surge Protection (SP) or Inflow prevention (IP) devices.
- Compact and simple structure, whose internal parts are fully corrosion, chemical and fertilizer resistant: Lower maintenance and increased life span.
- Field proven designed for use in irrigation applications with water quality such as river water, channel water, dam water or treated effluent with high reliability.
- Certified to functional standards: SAI AS4956 (Australia).
- Factory approval and Quality Control: Performance and specification tested and measured with specialized test bench, including vacuum pressure conditions.

Typical Applications

- Main irrigation networks: Protection against air accumulation and vacuum formation downstream of pumps, along supply lines and at elevations in main irrigation networks.
- Irrigation and landscape control heads: Protection against air accumulation and vacuum formation at filtration and fertilization stations and downstream of main control valves.
- Infield Systems: Protection against air accumulation and vacuum formation in proximity to water meters and automatic regulators.

Additional Features & Accessories

- Surge Protection (code SP): the kinetic orifice is partially closed during the second stage of the air relief, preventing damage to the air valve and the system.
- Assisted Closing (code AC): the kinetic orifice is set to be partially closed during air relief.
- Inflow Prevention (code IP): Prevents intake of atmospheric air in cases where this could lead to damaged pumps, required re-priming, or disruption of siphon.
- Service Ports (code P) fitted with 1/8"; DN3 or 1/4"; DN6 plug for pressure gauge connection, check point or test drain for air valve function.
- Test point (code T).
- Female threaded (code 077, 017) 3/4"; DN20 outlet, only for inlet sizes 3/4"-1"; DN20-25.
- 90 degrees elbow: Snapped to the outlet, for 3/4"; DN20 connection to drainage pipeline, only for inlet sizes 3/4"-1"; DN20-25.
- Extension with downwards outlet, only for inlet sizes 2-3"; DN50-80.



C10 Threaded 3/4"-1"; DN20-25



C10 Threaded 2"; DN50



C10 Flanged 2"-3"; DN50-80



Inlet and Outlet Connections

- Inlets: Male threaded ¾"-2"; DN20-50, flanged 2-3"; DN50-80
- Outlets: Sideways, female threaded 2"; DN50 only for inlet sizes 2-3"; DN50-80

Materials

- Body: Glass-Reinforced Nylon
- Float: Polypropylene, Glass-reinforced Nylon
- Elastomers: EPDM. Optional – Viton, only for inlet sizes 2"-3"; DN50-80

Operational Data


- Pressure Rating: 150 or 175 psi
- Minimum operating pressure: 1.5 psi
- Maximum operating pressure: 150 or 175 psi
- Media and operating temperature: Water, 33-140°F

Orifice Specifications


Inlet Sizes	Automatic Orifice	Kinetic Orifice		Surge Protection / Assisted Closing		
	Area	Diameter	Area	Number of holes	Hole Diameter	Total Area
Inch; mm	Sq inch	inch	Sq inch	--	inch	Sq inch
¾"-1"; DN20-25	0.008	0.795	0.497	---	---	---
2"-3"; DN50-80	0.019	1.772	2.465	4	0.157	0.078

Air Flow Performance Charts

Air Relief and Intake (Pipeline Filling, Draining and Vacuum Conditions)

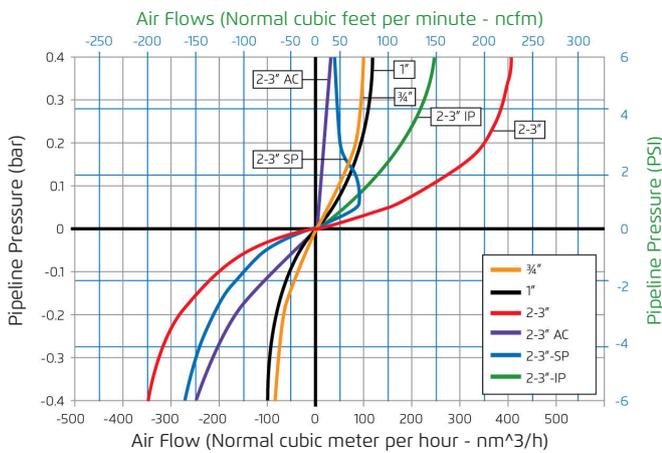


Air Release (Pressurized Operation)

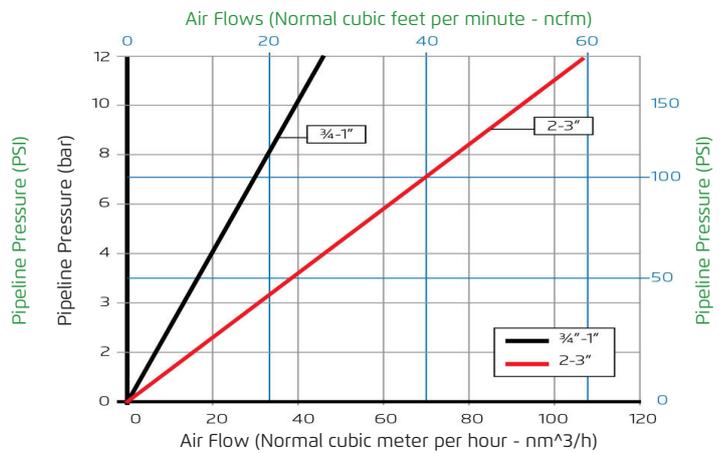





Cutaway - 3/4"-1"; DN20-25

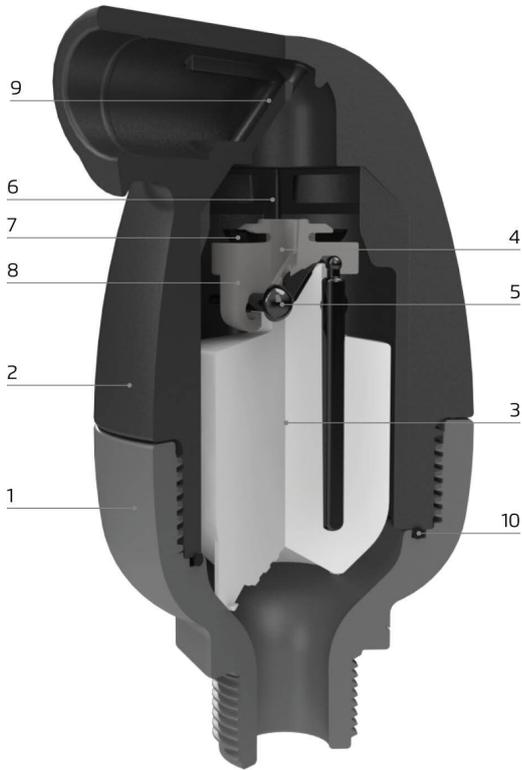


- [1] Base
- [2] Body
- [3] Float
- [4] Auto Orifice
- [5] Auto Orifice Seal
- [6] Kinetic Orifice
- [7] Kinetic Orifice Seal
- [8] Kinetic Plug
- [9] Insect Screen
- [10] O-Ring



Surge Protection (code SP), only for inlet sizes 2-3"; DN50-80



Inflow Prevention (code IP), only for inlet sizes 2-3"; DN50-80




Assisted Closing (code AC), only for inlet sizes 2-3"; DN50-80



Extension with downwards outlet, only for inlet sizes 2-3"; DN50-80


Cutaway - 2"-3"; DN50-80

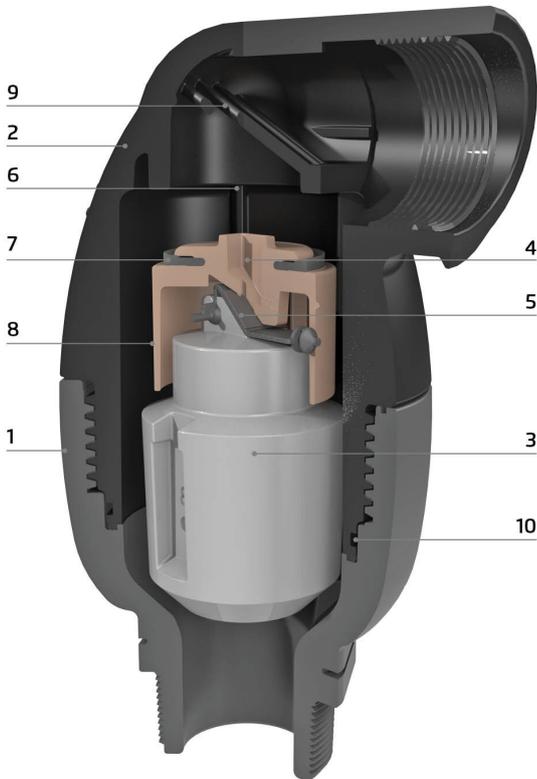

- [1] Base
- [2] Body
- [3] Float
- [4] Auto Orifice
- [5] Auto Orifice Seal
- [6] Kinetic Orifice
- [7] Kinetic Orifice Seal
- [8] Kinetic Plug
- [9] Insect Screen
- [10] O-Ring



Dimensions & Weights

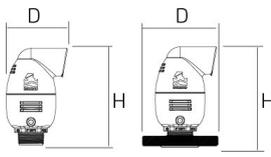										
		Threaded Connection ¾"-1"; DN20-25			Threaded Connection 2"; DN50			Flanged Connection 2"-3"; DN50-80		
Inlet Sizes	Connection	Width (D)	Height (H)	Weight	Width (D)	Height (H)	Weight	Width (D)	Height (H)	Weight
in; mm		in	in	lbs	in	in	lbs	in	in	lbs
¾"-1"; DN20-25	Threaded	3.819	6.299	1.10	---	---	---	---	---	---
2"; DN50	Threaded	---	---	---	5.630	9.449	3.31	---	---	---
2"; DN50	Flanged	---	---	---	---	---	---	6.496	9.449	4.30
3"; DN80	Flanged	---	---	---	---	---	---	7.874	9.961	6.83