IR	¾"	PRV	05	FF	P	BP	A

Size	
¾"	DN20
1"	DN25
1½"	DN40

Model	Code
Adjustable Direct Acting Pressure Reducers	PRV

Flow Rate Ranges	Code
Standard	00
Low Flow	05

Connection Categories	Code
Female-Female	FF
Male-Female (¾")	MF

Body Material	Code
Polymeric (Composite)	P

End Connections	Code
Threaded BSP	BP
Threaded NPT	NP

Springs	Code
Use Spring Selection Diagram according to Size & Pressure Range	A
	B
	C
	D
	Q

¾" Springs Selection Diagram & Pressure Range		
Spring	Pressure Range - bar	Pressure Range - psi
B - White	0.8-2.5	12-36
C - Red	2.0-4.0	29-58

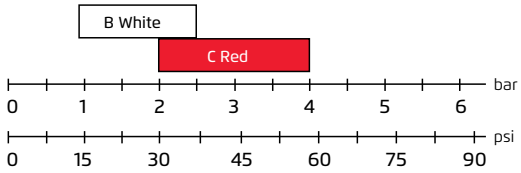
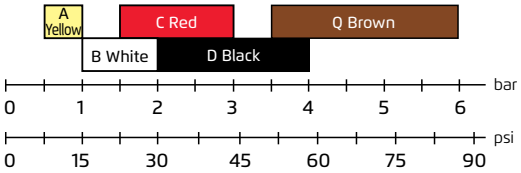
1" - 1½" Springs Selection Diagram & Pressure Range		
Spring	Pressure Range - bar	Pressure Range - psi
A - Yellow	0.5-1	7-14.5
B - White	1-2	14.5-29
C - Red	1.5-3	22-43.5
D - Black	2-4	29-58
Q - Brown	3.5-6	51-87