

SHARP 3-WAY MINI-PILOT

Model PC-SHARP-X-MP

SHARP is a sensitive and accurate diaphragm-operated mini-pilot. It is a multi-purpose 3-Way mini-pilot, based on a balance between the hydraulic force acting on the diaphragm, and the mechanical force of the calibration spring.

Features

- Universal Mini-Pilot
 - Serves as a Pressure Reducing Pilot, Pressure Sustaining Pilot, Flow Control Pilot [PC-XD-M] & Hydraulic Relay
- High Quality
 - All calibration springs made of Stainless Steel
- Accurate & Flexible
- Direct Pressure Gauge Installation

Typical Applications

- Pressure Reducing Valves
- Pressure Sustaining Valves
- Pressure Reducing & Sustaining Valves
- Flow Control (Pilot with Sealed Cover, full metal version: PC-XD-M)
- Hydraulic Relay

Technical Data

Pressure Rating: 145 psi

Water Temperature Range: 32-140 °F

Flow Factor:

Ports "0" to "3": Cv 0.25

Ports "3" to "2": Cv 0.18

Height (H): 7 Inch

Weight: 1.57 Lbs

Ports: ¼" NPT

Standard Materials:

Body: Brass

Cover: Polyamide 6 & 30% GF

Diaphragm & Seals: NBR


Internal Parts: Stainless Steel

Spring: Stainless Steel

Adjustment Range:

Spring	Spring Color	Setting range	Material
K	Gray	7-43 psi	St. St. 302
N	Natural	12-95 psi	St. St. 302
V	Blue & White	15-150 psi	St. St. 302
P	White	15-230 psi	St. St. 302

Standard spring - marked in bold

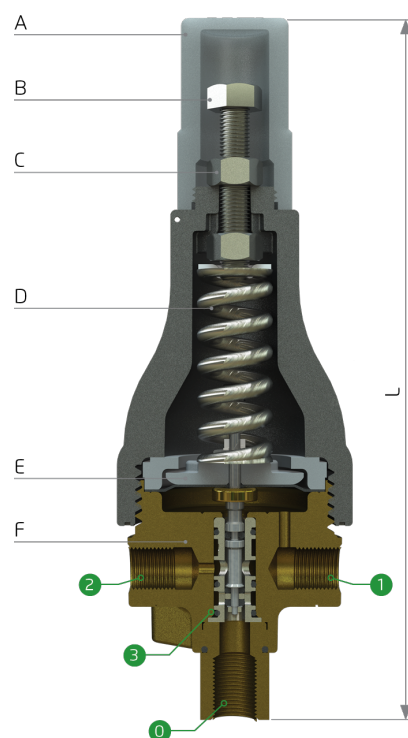


Part	Description
A	Non-tamper safety cap (Optional)
B	Adjusting screw
C	Locking nut
D	Calibration spring
E	Diaphragm
F	Body

Port	Connections
0	Upstream: Pressure Reducing/Flow Control; Vent: Pressure Sustaining
1	Sensing
2	Vent: Pressure Reducing/Flow Control; Upstream: Pressure Sustaining
3	Valve Control Chamber


* Flow Control Pilot [PC-XD-M] include low pressure sensing port on the metal sealed cover

Operation:


The SHARP Mini-Pilot sensing chamber is connected to the relevant pressure source according to application. The SHARP directs control pressure to & from valve control chamber, by opening and closing water passages (schematic drawing):

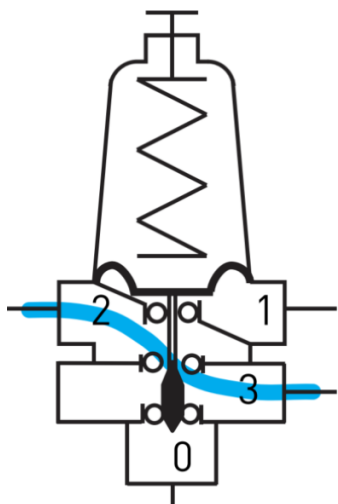

When sensed pressure lower
than setting: 2<-->3
Modulating Open (PRV)
Modulating Close (PSV)

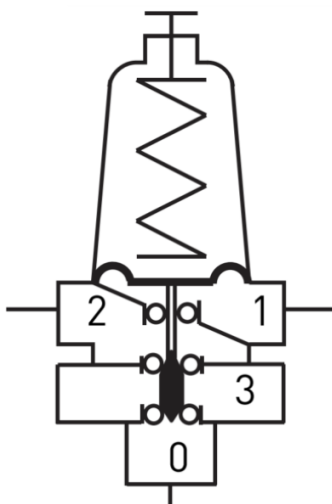

When sensed pressure equal to
setting: 2|<-->3|<-->0
"locked position"
all passages locked

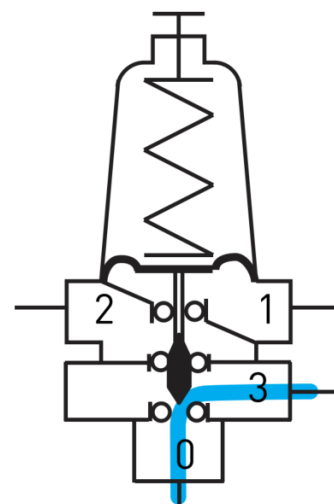

When sensed pressure higher
than setting: 0<-->3
Modulating Close (PRV)
Modulating Open (PSV)

Ordering guide:

Cat. no.	Description
5004L1GK00	PC-SHARP-X-MP, W/SPRING "K" (0.5-3.0 bar) 3W-METAL MULTI PURPOSE PILOT VALVE, WITH PLASTIC COVER PN16
5004L1G200	PC-SHARP-X-MP, W/SPRING "N" (0.8-6.5 bar), 3W-METAL MULTI PURPOSE PILOT VALVE, WITH PLASTIC COVER PN16
5004L1G400	PC-SHARP-X-MP, W/SPRING "V" (1-10 bar), 3W-METAL MULTI PURPOSE PILOT VALVE, WITH PLASTIC COVER PN16
5004L1GP00	PC-SHARP-X-MP, W/SPRING "P" (1-16 bar), 3W-METAL MULTI PURPOSE PILOT VALVE, WITH PLASTIC COVER PN16