



PRESSURE REDUCING VALVE

Model 1020

Hydraulically operated, pressure reducing control valve that reduces higher upstream pressure to lower constant downstream pressure, regardless of fluctuating demand or varying upstream pressure.

The BERMAD 1000 control valve features advanced design, accurate regulation, and high flow capacity. Its unique structure allows easy maintenance and supports various end connections to reduce pipeline stress.




Features & Benefits



- Easy set-up
 - Super light weight
 - Line pressure driven - no external power needed
 - Easy pressure setting - in site or pre-ordered
 - Adaptable on-site to a wide range of end connection
- Simple and durable design
 - Excellent cavitation resistance
 - Highly durable construction & material - No rust
 - Unitized actuator unit - remove, replace, restore
 - In-line serviceable - no need to remove from line
- All the benefits of a diaphragm actuated control valve
 - Wide flow range
 - Low flow stability
 - Drip tight sealing
 - Obstacle free flow pass
 - Easy addition of features

Typical Applications

- Municipal systems - Reducing pressure at potable water connections to buildings and structures
- Leakage Reduction - Minimizing Non-Revenue Water
- Residential Water Supply - Protecting pipes, fixtures, and appliances from damage

Typical Installation

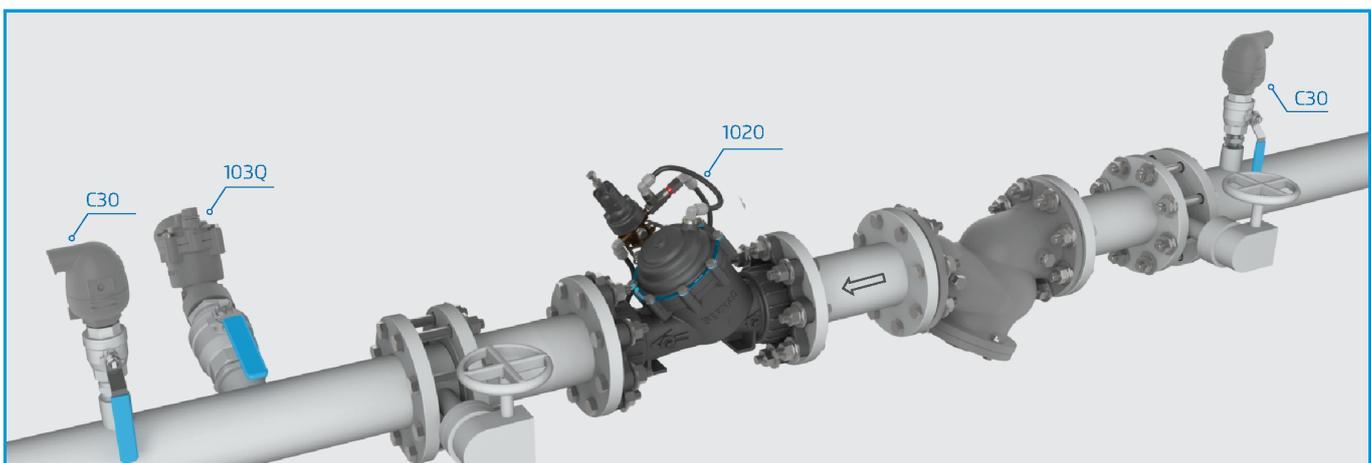

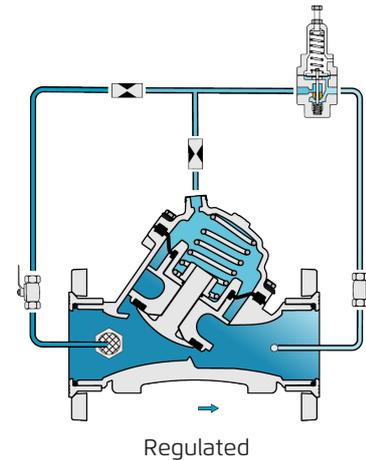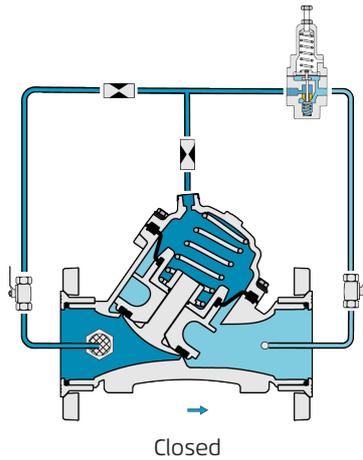

Main Valve

Size Range:

EN Series: 1½"-4"; DN40-100

ES Series: 2"-6"; DN50-150

Pattern: "Y" (globe)

Pressure Rating: 250 psi

End Connection: Threaded, Grooved, Flanged

Temperature Rating: For Cold Water Applications

Optional higher temperature: Consult BERMAD

Standard Materials:

Body & Cover: Reinforced Polyamide

Cover Bolts: Stainless Steel 304

Internals: Reinforced Polyamide

Diaphragm: EPDM

Spring: Stainless Steel

Seals: EPDM

Control System

Standard Materials:

Accessories: Stainless Steel / Bronze & Brass / Polyamide

Tubing: Stainless Steel or Polypropylene

Fittings: Stainless Steel or Acetal

Pilot standard materials:

Body: Stainless Steel, Bronze & Brass

Elastomers: Synthetic Rubber

Internals and Spring: Stainless Steel

Pilot Options:

Various pilots and calibration springs are available.

Select according to valve size and operating conditions.

For more details check relevant pilots product pages.

Notes

- Inlet Pressure, Outlet Pressure and Flow-rate are required for optimal sizing and cavitation analysis.
- Recommended continuous flow velocity: 0.1-6.0 m/sec; 0.3-20 ft/sec.
- Minimum operating pressure: 0.7 bar; 10 psi. For lower pressure requirements consult factory.

For detailed Engineering & Specification data, IOM and CAD Drawings, visit the Model Page on the [BERMAD](https://www.bermad.com) website.