

LEVEL CONTROL AND PRESSURE SUSTAINING VALVE

with Electric Float Switch

Model 453-65

Hydraulically operated, level control and pressure sustaining control valve that controls reservoir filling and reservoir level. During filling the valve sustains minimum upstream pressure regardless of fluctuating flow or reservoir level. Reservoir filling is in response to a Bi-level electric float switch signal opening at a pre-set low level and shutting off at a pre-set high level.

The BERMAD 400 Series valves have an advanced design with a full-bore seat and unobstructed flow path. Their one-piece elastomeric assembly ensures long life and reliable actuation in harsh conditions.




Features & Benefits



- Line pressure driven – Independent operation
- High performance control trim
 - High stability and accuracy at wide flow range
 - Drip tight sealing
- Bi-Level electric float control
 - On/Off service
 - Suited to various float switches
- Solenoid controlled
 - Low power consumption
 - Wide ranges of voltages
 - Normally Open, Normally Closed or Latch
- In-line serviceable
- Fully supported & balanced diaphragm
 - Excellent low flow regulation performance

Typical Applications


- Level control for water reservoirs
- Bi-Level control for water refreshment
- Water delivery system - Prioritizing upstream over downstream demand
- Serves as a safety valve in tank filling systems
- Potable water, fire protection and grey water

Typical Installation

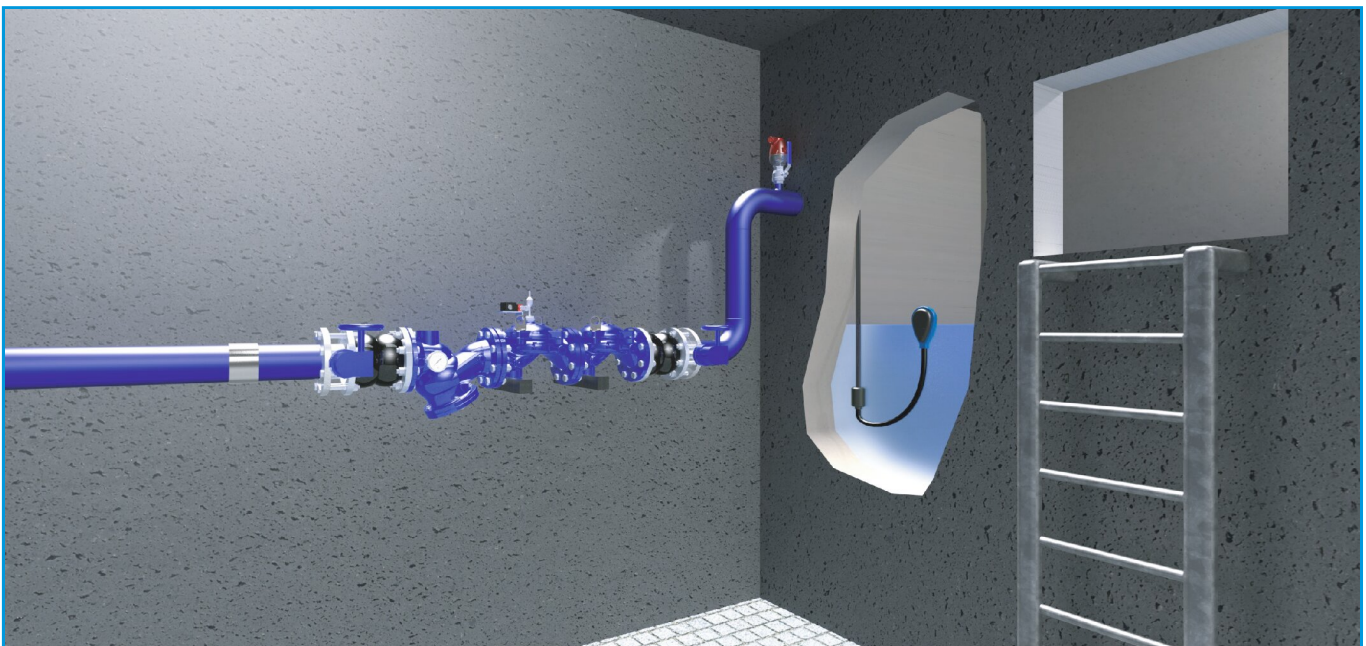

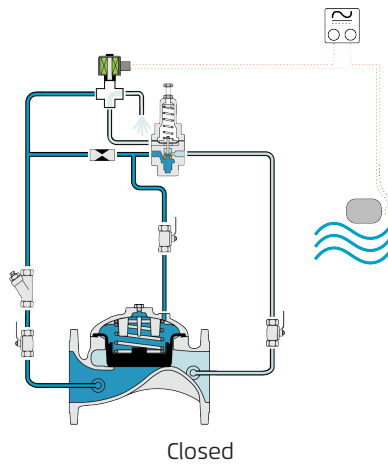

Closed

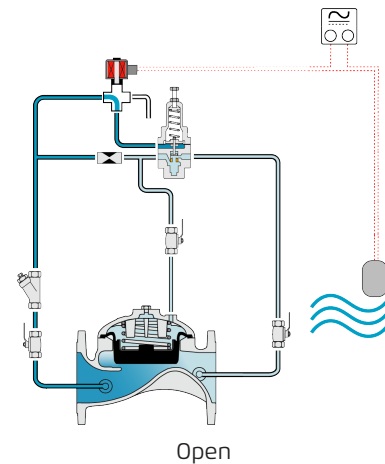

Open

This drawing refers to 1½ – 8"; 40-200 mm sized valves only. For other sizes please refer to the Model's IOM.

Main Valve

Size Range: 1½-12"; DN40-300

Pattern: Globe

Pressure Rating: 250 psi

End Connection: Flanged, Threaded, Grooved

Temperature Rating: 140°F

Optional higher temperature: Consult BERMAD

Standard Materials:

Body & Cover: Ductile Iron

Cover Bolts: Steel

Diaphragm: Reinforced EPDM with vulcanized radial seal disk

Spring: St. St. 302

Coating: Dark blue Fusion bonded epoxy

For other materials contact BERMAD

Control System

Standard Materials:

Accessories: Stainless Steel, Bronze & Brass

Tubing: Stainless Steel or Copper

Fittings: Stainless Steel or Brass

Pilot standard materials:

Body: Stainless Steel, Bronze & Brass

Elastomers: Synthetic Rubber

Internals and Spring: Stainless Steel

Solenoid standard materials:

Body: Brass or Stainless Steel

Elastomers: NBR or FPM

Enclosure: Molded Epoxy

Solenoid Electrical Data:

Voltages:

(AC): 24, 110-120, 220-240, (50-60Hz)

(DC): 12, 24, 110, 220

Power Consumption:

(AC): 30VA, inrush; 15VA (8W), holding or 70VA, inrush; 40VA (17.1W), holding

(DC): 8-11.6W

Values may vary according to specific solenoid model.

For more details check solenoid product page.

Notes

- Inlet Pressure, Outlet Pressure and Flow-rate are required for optimal sizing.
- Recommended maximum flow velocity: 6.0 m/sec; 20 ft/sec.
- Minimum operating pressure: 0.7 bar; 10 psi. For lower pressure requirements consult factory.

For detailed Engineering & Specification data, IOM and CAD Drawings, visit the Model Page on the [BERMAD](https://www.bermad.com) website.