

ELECTRONIC CONTROL VALVE

with Opening and Closing Speed Controls and Active Double Chamber

Model 718-03-B

Electronic control valve that combines the advantages of an excellent modulating, line pressure driven, hydraulic control valve with those of electronic control. In response to signals from the electronic controller, the valve changes its opening position per preset values programmed into the controller. The valve is double chamber actuated and is powered to fully open and close even at very low pressure. Both the valve's opening and closing speeds are controllable and on-site adjustable.

The BERMAD 700 SIGMA EN/ES series valves are hydraulic globe valves with a raised seat and double chamber actuator. They provide unobstructed flow, effective high-pressure modulation, and minimal cavitation, complying with various potable water standards.



Features & Benefits




- Designed to - Stand up to the toughest conditions
 - Excellent anti-cavitation properties
 - Wide flow range
 - High stability and accuracy
 - Drip tight sealing
- Double chamber design
 - Moderated valve reaction
 - Protected diaphragm
 - Optional operation in very low pressure
 - Moderated closing curve
- Flexible design - Easy addition of features
- Obstacle free flow pass
- V-Port throttling plug (optional) - Very stable at low flow
- Compatible with various standards
- High quality materials
- In-line serviceable - Easy maintenance

Typical Applications

- Regulation near-zero pressure
- Industrial and municipal systems - Pressure and flow regulation
- Mixing junctions control
- Water treatment plants - Process control
- Filtration system - Process flow control in filtration applications

Typical Installation



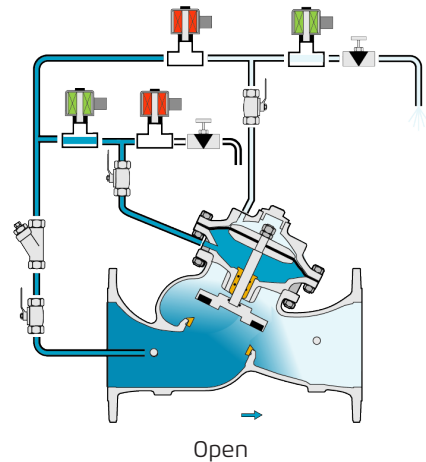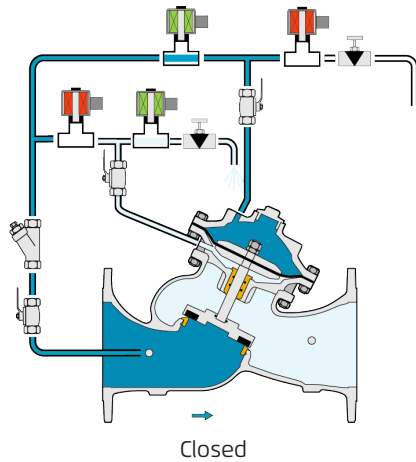

This drawing refers to 1½ – 8"; 40-200 mm sized valves only. For other sizes please refer to the Model's IOM.

Main Valve

Size Range:

EN Series: 1½"-16"; DN40-400

ES Series: 2½"-24"; DN65-600

Pattern: "Y" (globe)

Pressure Rating: 250 psi; 400 psi

End Connection: Flanged

Plug Types: Flat disc, V-port, Cavitation cage

Temperature Rating: 180°F

For 140–180°F consult factory

Standard Materials:

Body & Cover: Ductile Iron

Bolts, Nuts & Studs: Stainless Steel

Internals: Stainless Steel, Tin Bronze, Coated Steel & POM

Diaphragm: Fabric-reinforced synthetic rubber

Seals: Synthetic rubber

Coating: Dark blue Fusion bonded epoxy

For other materials contact BERMAD

Control System

Standard Materials:

Accessories: Stainless Steel, Bronze & Brass

Tubing: Stainless Steel or Copper

Fittings: Stainless Steel or Brass

Solenoid standard materials:

Body: Brass or Stainless Steel

Elastomers: NBR or FPM

Enclosure: Molded Epoxy

Solenoid Electrical Data:

Voltages:

(AC): 24, 110-120, 220-240, (50-60Hz)

(DC): 12, 24, 110, 220

Power Consumption:

(AC): 30VA, inrush; 15VA (8W), holding or 70VA, inrush; 40VA (17.1W), holding

(DC): 8-11.6W

Values may vary according to specific solenoid model.

For more details check solenoid product page.

Notes

- Inlet Pressure, Outlet Pressure and Flow-rate are required for optimal sizing and cavitation analysis.
- Recommended continuous flow velocity: 0.1-6.0 m/sec; 0.3-20 ft/sec.
- Minimum operating pressure: 0.2 bar; 3 psi. External operating pressure recommended.

For detailed Engineering & Specification data, IOM and CAD Drawings, visit the Model Page on the [BERMAD](https://www.bermad.com) website.