

LEVEL CONTROL VALVE

with Bi-Level Electric Float

Model 750-65

Hydraulically operated control valve that controls reservoir filling and reservoir level. Reservoir filling is in response to a Bi-level electric float switch signal opening at a pre-set low level and shutting off at a pre-set high level.

The BERMAD 700 SIGMA EN/ES series valves are hydraulic globe valves with a raised seat and double chamber actuator. They provide unobstructed flow, effective high-pressure modulation, and minimal cavitation, complying with various potable water standards.




Features & Benefits



- Designed to - Stand up to the toughest conditions
 - Excellent anti-cavitation properties
 - Wide flow range
 - High stability and accuracy
 - Drip tight sealing
- Double chamber design
 - Moderated valve reaction
 - Protected diaphragm
 - Optional operation in very low pressure
 - Moderated closing curve
- Flexible design - Easy addition of features
- Obstacle free flow pass
- V-Port throttling plug (optional) - Very stable at low flow
- Compatible with various standards
- High quality materials
- In-line serviceable - Easy maintenance

Typical Applications

- Level control for water reservoirs
- Bi-Level control for water refreshment and silent operation
- Potable water, fire protection and grey water
- Serves as a safety valve in tank filling systems

Typical Installation

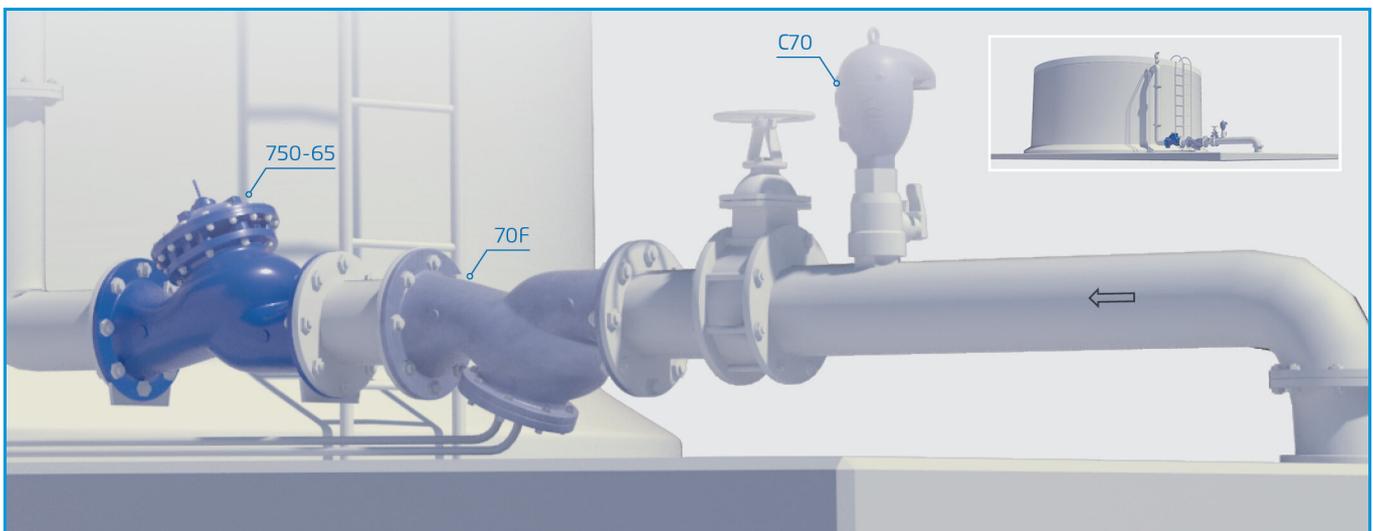

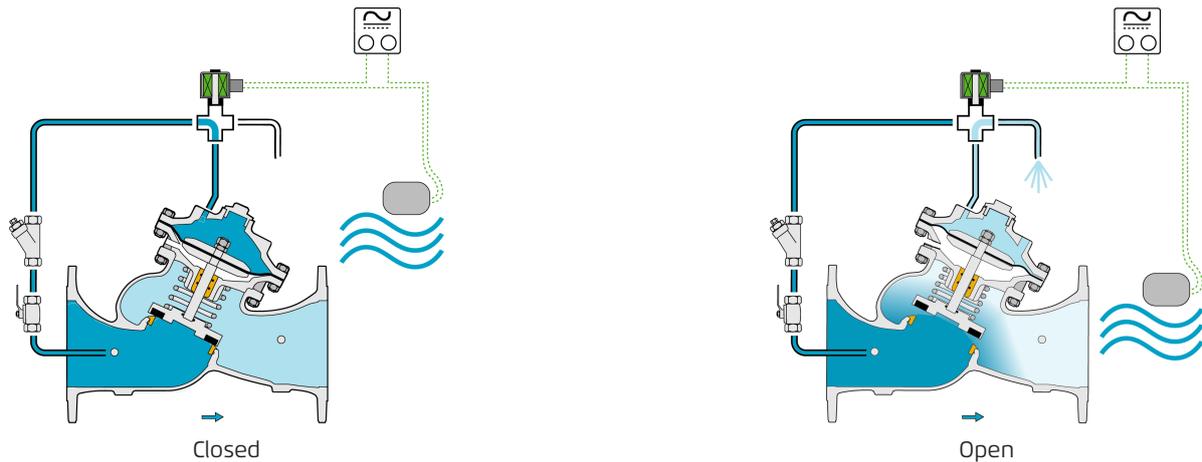

This drawing refers to 1½ – 8"; 40-200 mm sized valves only. For other sizes please refer to the Model's IOM.

Main Valve

Size Range:

EN Series: 1½"-16"; DN40-400

ES Series: 2½"-24"; DN65-600

Pattern: "Y" (globe)

Pressure Rating: 250 psi; 400 psi

End Connection: Flanged

Plug Types: Flat disc, V-port, Cavitation cage

Temperature Rating: 180°F

For 140-180°F consult factory

Standard Materials:

Body & Cover: Ductile Iron

Bolts, Nuts & Studs: Stainless Steel

Internals: Stainless Steel, Tin Bronze, Coated Steel & POM

Diaphragm: Fabric-reinforced synthetic rubber

Seals: Synthetic rubber

Coating: Dark blue Fusion bonded epoxy

For other materials contact BERMAD

Control System

Standard Materials:

Accessories: Stainless Steel, Bronze & Brass

Tubing: Stainless Steel or Copper

Fittings: Stainless Steel or Brass

Solenoid standard materials:

Body: Brass or Stainless Steel

Elastomers: NBR or FPM

Enclosure: Molded Epoxy

Solenoid Electrical Data:

Voltages:

(AC): 24, 110-120, 220-240, (50-60Hz)

(DC): 12, 24, 110, 220

Power Consumption:

(AC): 30VA, inrush; 15VA (8W), holding or 70VA, inrush; 40VA (17.1W), holding

(DC): 8-11.6W

Values may vary according to specific solenoid model.

For more details check solenoid product page.

Float Switch:

Max Current: 16A @ 250 V

Fluid Specific Weight: 0.95-1.1

Working Temperature: Water up to 65°C (140°F)

Dimensions:

Cable Length - 10 m; 32.8 ft

Length - 103.5 mm; 4" Width - 78 mm; 3"

Notes

- Inlet Pressure, Outlet Pressure and Flow-rate are required for optimal sizing.
- Recommended maximum flow velocity: 6.0 m/sec; 20 ft/sec.
- Minimum operating pressure: 0.7 bar; 10 psi. For lower pressure requirements consult factory.
- See BERMAD float installation recommendation.

For detailed Engineering & Specification data, IOM and CAD Drawings, visit the Model Page on the [BERMAD](http://www.bermad.com) website.

