

LEVEL AND FLOW CONTROL VALVE

With Altitude Pilot

Model 757-80-U

Hydraulically operated control valve that controls reservoir filling and reservoir level. During filling, the valve limits the flow to a pre-set maximum, regardless of fluctuating upstream pressure or reservoir level and protects the valve from cavitation damage. The valve shuts off at a pre-set reservoir high level and fully opens in response to an approximately one meter (3 ft) level drop, as sensed by the 3-Way altitude pilot mounted on the main valve.

The BERMAD 700 SIGMA EN/ES series valves are hydraulic globe valves with a raised seat and double chamber actuator. They provide unobstructed flow, effective high-pressure modulation, and minimal cavitation, complying with various potable water standards.




Features & Benefits


- Designed to - Stand up to the toughest conditions
 - Excellent anti-cavitation properties
 - Wide flow range
 - High stability and accuracy
 - Drip tight sealing
- Double chamber design
 - Moderated valve reaction
 - Protected diaphragm
 - Optional operation in very low pressure
 - Moderated closing curve
- Flexible design - Easy addition of features
- Obstacle free flow pass
- V-Port throttling plug (optional) - Very stable at low flow
- Compatible with various standards
- High quality materials
- In-line serviceable - Easy maintenance

Typical Applications


- Municipal systems - Level control for water towers and elevated reservoirs
- Reservoir filling flow control and cavitation prevention
- Bi-Level control for water refreshment
- Water delivery system - Prioritizing upstream over reservoir filling
- Potable water and fire protection

Typical Installation

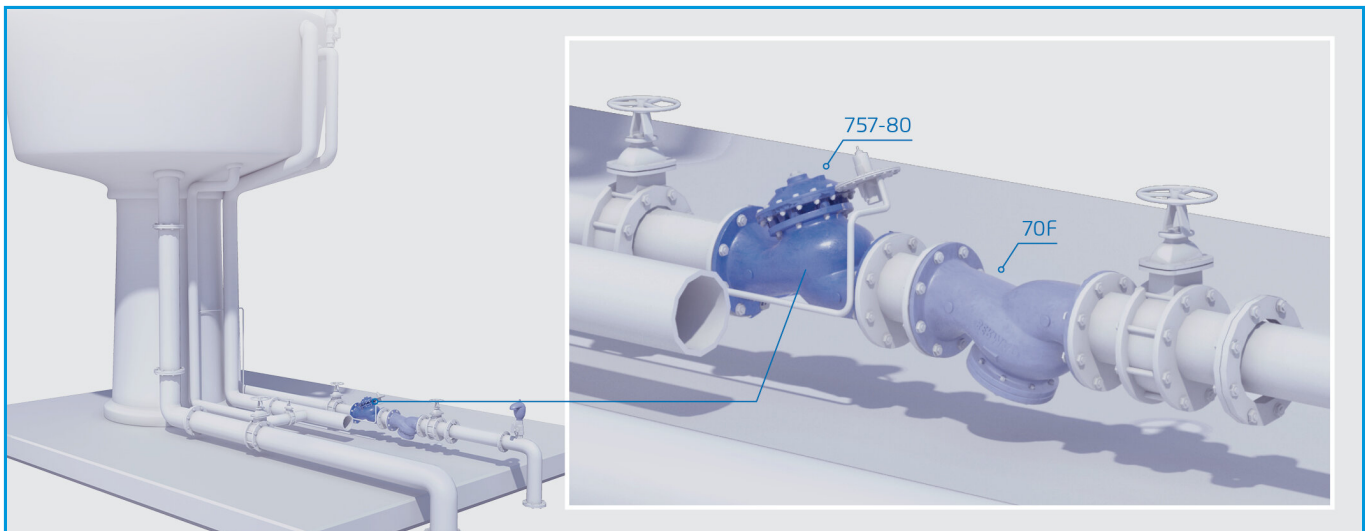

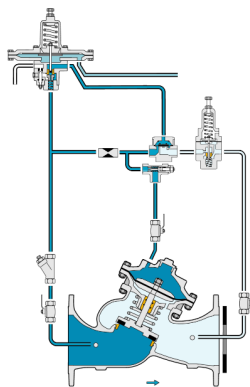

Closed

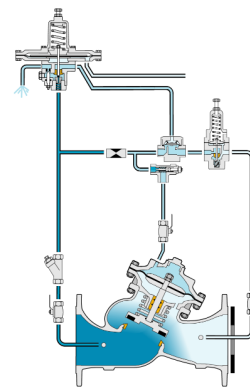

Regulating

This drawing refers to 1½ – 8"; 40-200 mm sized valves only. For other sizes please refer to the Model's IOM.

Main Valve

Size Range:

EN Series: 1½"-16"; DN40-400

ES Series: 2½"-24"; DN65-600

Pattern: "Y" (globe)

Pressure Rating: 250 psi; 400 psi

End Connection: Flanged

Plug Types: Flat disc, V-port, Cavitation cage

Temperature Rating: 180°F

For 140–180°F consult factory

Standard Materials:

Body & Cover: Ductile Iron

Bolts, Nuts & Studs: Stainless Steel

Internals: Stainless Steel, Tin Bronze, Coated Steel & POM

Diaphragm: Fabric-reinforced synthetic rubber

Seals: Synthetic rubber

Coating: Dark blue Fusion bonded epoxy

For other materials contact BERMAD

Control System

Standard Materials:

Accessories: Stainless Steel, Bronze & Brass

Tubing: Stainless Steel or Copper

Fittings: Stainless Steel or Brass

Pilot Options:

Various pilots and calibration springs are available.

Select according to valve size and operating conditions.

For more details check relevant pilots product pages.

Orifice Standard Material: POM-C or Stainless Steel

Notes

- Orifice diameter is calculated for each valve.
- Flow Setting Range: (-)15% and (+)25% from predetermined flow.
- Orifice adds 20-32mm; 0.8"-1.2" to valve length.
- Recommended continuous flow velocity: 0.3-6.0 m/sec; 1-20 ft/sec.
- Minimum operating pressure: 0.7 bar; 10 psi. For lower pressure requirements consult factory.
- Inlet Pressure, Outlet Pressure and Flow-rate are required for optimal sizing and cavitation analysis.

For detailed Engineering & Specification data, IOM and CAD Drawings, visit the Model Page on the [BERMAD](https://www.bermad.com) website.