



# BOOSTER PUMP CONTROL VALVE, DOUBLE CHAMBERED ACTUATOR

with Opening and Closing Speed Controls and  
Limit Switch

## Model 840-03-S

Hydraulically operated, piston actuated, active check pump control valve that opens fully or shuts off in response to electric signals. The valve isolates the pump from the system during pump startup and shutdown, thereby preventing pipeline surges.

BERMAD 800 series valves are hydraulically operated, piston actuated globe valves for high pressure. Their full-bore body ensures unobstructed flow, and they are available in various models, sizes, patterns, and end connections.



### Features & Benefits


- Robust structure, piston actuated – High pressure service
- Line pressure driven – Independent operation
- Elegant simplicity
  - Cost effective
  - Simple to maintain
  - Minimal external accessories
- In-line serviceable - Easy maintenance
- Double chamber design
  - Moderated valve reaction
  - Moderated closing curve
- Flexible design - Easy addition of features
- Semi-straight flow – Non-turbulent flow
- Stainless Steel raised seat - Cavitation damage resistant
- Obstacle free, full bore – Uncompromising reliability
- V-Port throttling plug (optional) - Very stable at low flow

### Typical Applications

- Pumping stations - Controls pump start-up and shut-down

### Typical Installation



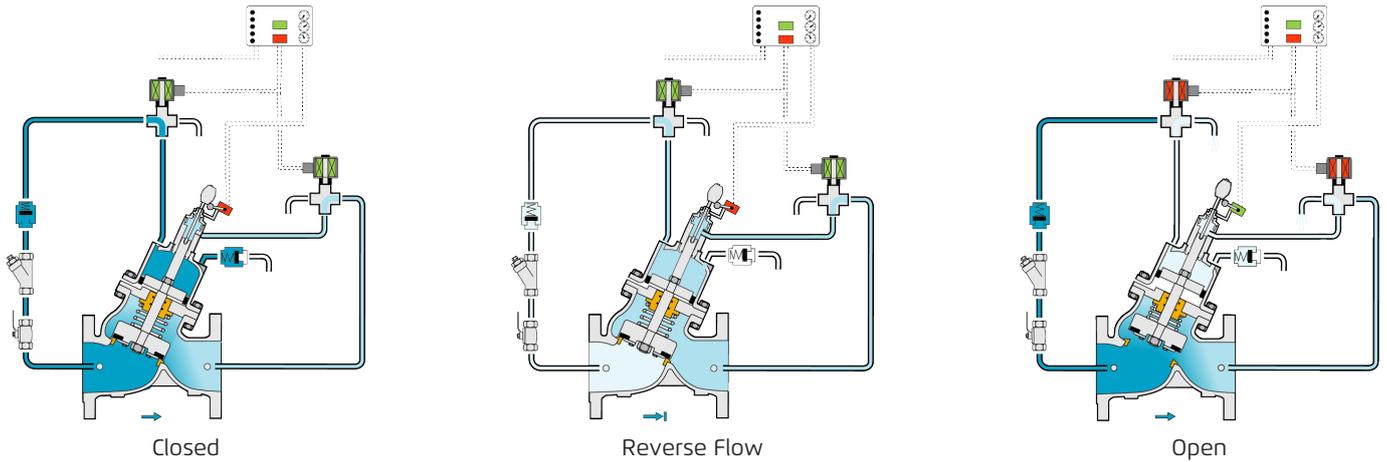

This drawing refers to 1½ – 14"; DN40-350 sized valves only. For other sizes please refer to the Model's IOM.

### Main Valve

**Size Range:** 1½-20"; 40-500 mm

**Pattern:** "Y" (globe) & "A" (angle)

**Pressure Rating:** 40 bar

**End Connection:** Flanged, Threaded, Grooved

**Plug Types:** Flat disc, V-port, Cavitation cage

**Temperature Rating:** 80°C

*For 60–80°C consult factory*

#### Standard Materials:

**Body & Cover:** Ductile Iron (1½-10"; 40-250 mm) ; Cast Steel (12-24"; 300-600 mm) & Stainless Steel Cover

**Bolts, Nuts & Studs:** Stainless Steel

**Internals:** Stainless Steel & Tin Bronze

**Seals:** Synthetic rubber

**Coating:** Dark blue Fusion bonded epoxy

*For other materials contact BERMAD*

### Control System

#### Standard Materials:

**Accessories:** Stainless Steel, Bronze & Brass

**Tubing:** Stainless Steel or Copper

**Fittings:** Stainless Steel or Brass

#### Solenoid standard materials:

**Body:** Brass or Stainless Steel

**Elastomers:** NBR or FPM

**Enclosure:** Molded Epoxy

#### Solenoid Electrical Data:

##### Voltages:

**(AC):** 24, 110-120, 220-240, (50-60Hz)

**(DC):** 12, 24, 110, 220

##### Power Consumption:

**(AC):** 30VA, inrush; 15VA (8W), holding or 70VA, inrush; 40VA (17.1W), holding

**(DC):** 8-11.6W

Values may vary according to specific solenoid model. For more details check solenoid product page.

#### Limit Switch:

**Switch Type:** SPDT

**Electrical Rating:** 10A, type gl or gG

**Operating Temperature:** Up to 85°C (185°F)

**Enclosure Rating:** IP66

### Notes

- Recommended continuous flow velocity: 0.1-6.0 m/sec; 0.3-20 ft/sec.
- Minimum operating pressure: 2.0 bar; 30 psi. For lower pressure requirements consult factory.

For detailed Engineering & Specification data, IOM and CAD Drawings, visit the Model Page on the [BERMAD](https://www.bermad.com) website.