

PRESSURE REDUCING PILOT VALVE

Model 2PBL

This is a direct acting valve, actuated by a pressure responsive diaphragm, which tends to reach equilibrium with the set spring force. Fully balanced trim ensures high accuracy and stability. When used in a pressure reducing circuit, the pilot modulates closed as downstream pressure rises above set point.

Features

- Internal or external pressure sensing
- Differential pressure sensing
- Direct Pressure Gauge Installation
- Large variety of setting springs
- Non-tamper safety cap

Typical Applications

- Pressure reducing valves (Standard model 2PBL)
- Flow Control Valves (2PBL-DR)
- Surge Anticipating Valves, low pressure pilot (2PBL-R)
- Closing surge prevention, additional feature 49 (2PBL-R)

Technical Data

Pressure Rating: 400 psi

Water Temperature Range: 32-176 °F

Flow Factor: Cv 1.13

Height (H): 7.3 inch; with 350 psi spring Z- 9.6 Inch

Width (W): 2.36 Inch

Weight: 2.6 Lbs; with 350 psi spring Z- 3.7 Lbs

Standard Materials:

Body: Bronze or St. St. 316

Cover: Brass, St. St. 316 or Polyamide (for cold water)

Lower Plug: St. St. 316, Brass or Polyamide

Diaphragm & Seals: NBR or EPDM

Internal Parts: Stainless Steel & Brass

Spring: Stainless Steel

Optional Materials:

Body: Nickel Aluminum Bronze, Hastelloy, Super Duplex

Cover: Nickel Aluminum Bronze, Hastelloy, Super Duplex

Diaphragm & Seals: FPM (Viton®)



The technical data refers to metal cover and lower plug only.

Adjustment Range:

Spring	Spring Color	Setting range	Material
J*	Green & Red	3-25 psi	St. St. 316
K	Gray	7-43 psi	St. St. 302
Y	Gray & Red	7-43 psi	St. St. 316
N	Natural	12-95 psi	St. St. 302
L	Red & Orange	12-94 psi	St. St. 316
V	Blue & White	15-150 psi	St. St. 302
T	Blue & Red	15-150 psi	St. St. 316
P	White	15-230 psi	St. St. 302
W	White & Red	15-230 psi	St. St. 316
Z	Red	72-362 psi	St. St. 316

Standard spring - marked in bold

* For #2PBL-DR - differential pressure for flow control

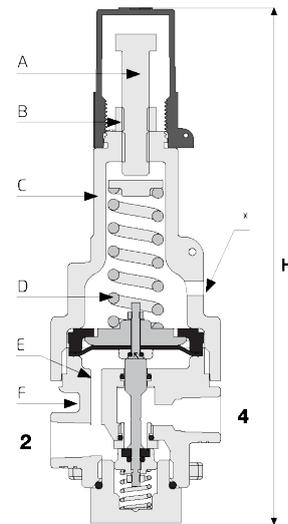

Part	Description
A	Adjusting screw
B	Locking nut
C	Cover
D	Spring
E	Internal sensing
F	Body

Port	Size	Connections
4	¼" NPT	In
2	¼" NPT	Out
1/3	¼" NPT	Remote sensing (optional) or pressure gauge
*	⅛" NPT	Optional

Always recommended to refer to control diagram

All images in this catalog are for illustration only