

2-WAY MODULATING HORIZONTAL FLOAT

Model 60 Float


This 2-Way Modulating Horizontal Float is actuated by a float either pulling the float pilot arm down when level drops, or floating it up when level rises. The float pilot throttles closed as level rises towards set point, eventually closing drip tight.

Technical Data

Pressure Rating: 16 bar
Water Temperature Range: 0-50 °C
Flow Factor: Kv 1.4

Standard Materials:

Body: Stainless Steel 316
Internal Parts: POM-C & NBR
Lever System: Stainless Steel 316
Float: Stainless Steel 316
Float Rod: Stainless Steel 316

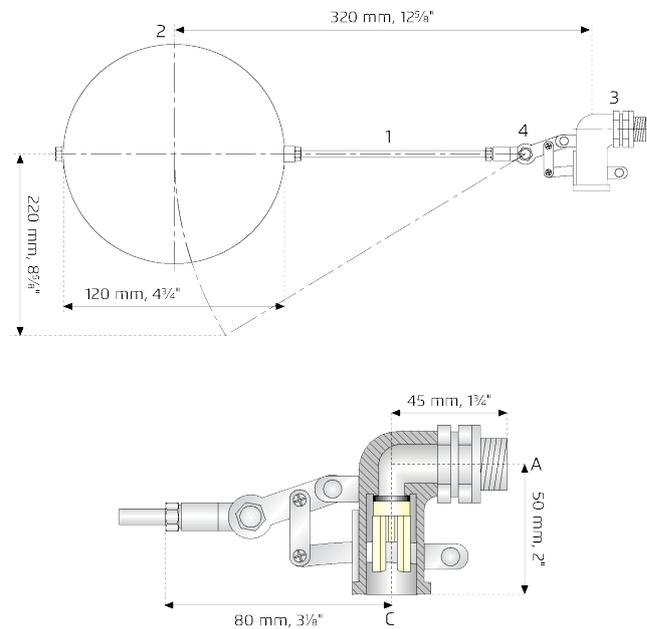

Part	Description
1	Float Rod
2	Float
3	Float Pilot
4	Lever system

Port	Size	Connections
A	1/2" ISO-7-Rp	In
C	1/2" ISO-7-Rp	Vent