



3-WAY SOLENOID VALVE

Direct Acting - Plunger Actuated

Model 311

This solenoid valve is direct acting 3-Way (can also be used as 2-Way) plunger actuated solenoid valve. It has a compact construction and is suitable for controlling BERMAD's hydraulic control valves using water or air. This solenoid valve does not require a minimum operating pressure and is not affected by the mounting position. Its construction also provides long life and durability. The epoxy encapsulation efficiently dissipates heat, to suit continuous duty applications.

ERMAD

Features

- Short response time
- Compact design
- Wide pressure range
- Normally Open or Closed versions

Technical Data

Ports: ¼", 1/8" NPT

General purpose: IP 65 with DIN, cable plug

Standard materials:

Body: Stainless Steel 316 Elastomers: FPM (Viton®) **Enclosure:** Molded epoxy Internals: Stainless Steel

Temperature:

Nominal ambient: 0.5 to 55°C: 33 to 131°F⁽¹⁾ Maximum fluid: 0 to 90°C: 32 to 194°F

Electrical data:

Voltages:(2)


(ac): 24, 110, 220 (50Hz) (ac): 24, 120, 240 (60Hz)

(dc): 24

Tolerance: ±10% Power consumption:

(ac): 21 VA, inrush; 12 VA (8W), holding

(dc): 8W

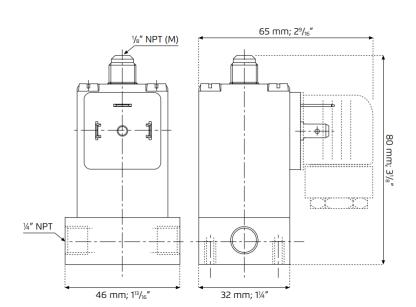

| Orifice DN ⁽²⁾ | Pressure Range | |
|---------------------------|----------------|-------|
| mm | Bar | psi |
| 0.8 | 0-40 | 0-580 |
| 1.0 | 0-30 | 0-435 |

Hydraulic data:

Circuit functions







2-Way Normally Open

Notes:

- (1) Max. ambient temperature is determined under continuously energized conditions, and with max. fluid temperature.
- (2) Required filtration 500 micron.
- (3) 311A or 311C (R port is plugged)
- (4) 311B or 311D (R port is plugged)



3-Way Normally Closed



3-Way Normally Open



www.bermad.com

All images in this catalog are for illustration only

The information contained herein may be changed by BERMAD without notice. BERMAD shall not be held liable for any errors. © Copyright 2015-2025 BERMAD CS Ltd