

SOLENOID CONTROLLED VALVE

Model 710-M5/M5M/M5L

Hydraulically operated, solenoid controlled valve that either opens fully or shuts off in response to an electric signal. It is available in several models including Normally Open (NO), Normally Closed (NC) or LATCH.

The BERMAD 700 Series large control valves are hydraulically operated and diaphragm actuated. Their unique hydro-dynamic globe design with an open plug ensures high flow capabilities.




Features & Benefits



- Hydrodynamic wide globe valve body provides:
 - Higher flow coefficient (Kv; Cv) than standard globe valves
 - Higher resistance to cavitation damage
- In-line serviceable
- Valves are suitable for working with all types of command: Hydraulic, Electric and Pneumatic.
- Self-operated valves that can work without an external source of power
- Wide range of options and accessories:
 - Visual position indicator
 - Limit switches
 - Analog opening output
 - Large selection of control accessories
 - Large inspection and service ports (700-M5L)

Typical Applications


- District Cooling Plants (DCP) - Process control
- Water reservoirs - Bypass for direct supply during reservoir maintenance

Typical Installation

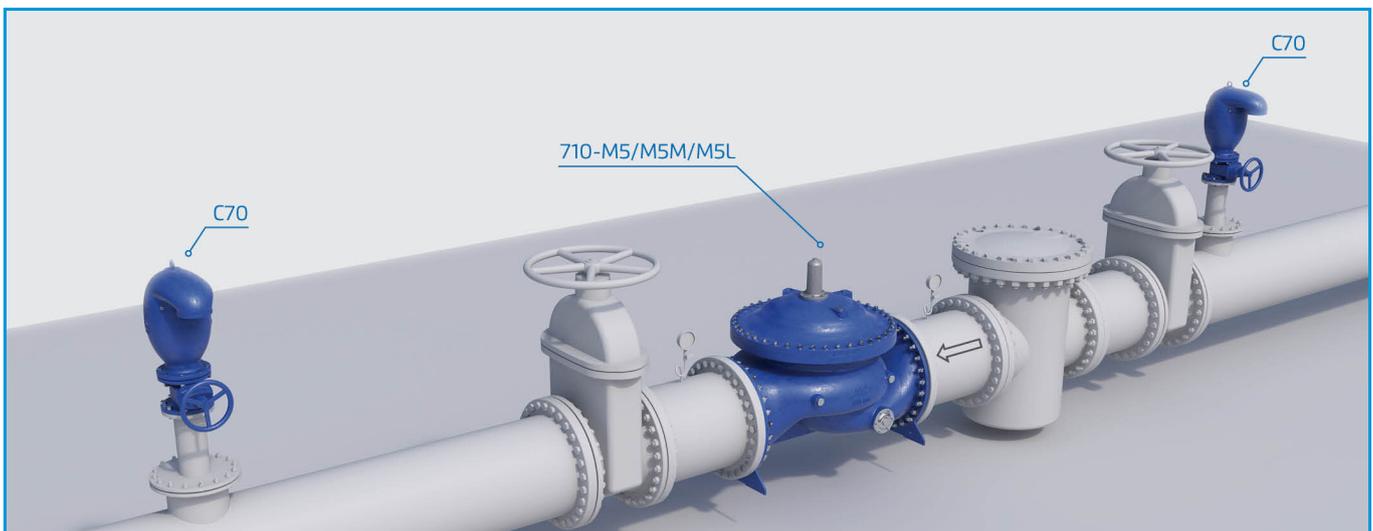

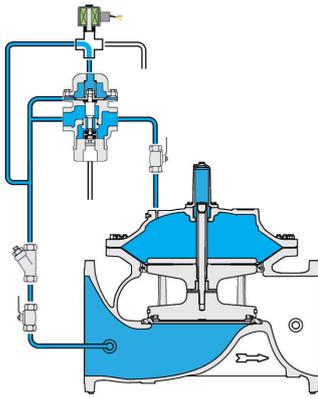

Closed

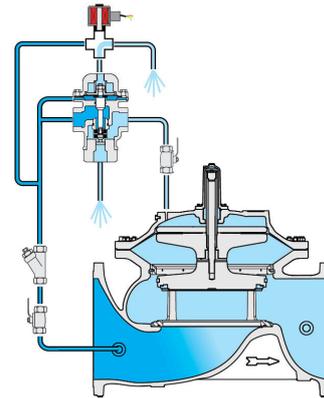

Open

Main Valve

Size Range: 20"-36"; DN500-900

Pattern: Globe

Pressure Rating: 400 psi

End Connection: Flanged

Temperature Rating: 180°F

For 140-180°F consult factory

Standard Materials:

Body & Cover: Ductile Iron

Cover Bolts: Stainless Steel

Internals: Epoxy coated Ductile Iron, Stainless Steel & Tin Bronze

Diaphragm: Fabric-reinforced synthetic rubber

Seals: Synthetic rubber

Coating: Dark blue Fusion bonded epoxy

For other materials contact BERMAD

Control System

Standard Materials:

Accessories: Stainless Steel, Bronze & Brass

Tubing: Stainless Steel or Copper

Fittings: Stainless Steel or Brass

Solenoid standard materials:

Body: Brass or Stainless Steel

Elastomers: NBR or FPM

Enclosure: Molded Epoxy

Solenoid Electrical Data:

Voltages:

(AC): 24, 110-120, 220-240, (50-60Hz)

(DC): 12, 24, 110, 220

Power Consumption:

(AC): 30VA, inrush; 15VA (8W), holding or 70VA, inrush; 40VA (17.1W), holding

(DC): 8-11.6W

Values may vary according to specific solenoid model.

For more details check solenoid product page.

Notes

- Inlet Pressure, Outlet Pressure and Flow-rate are required for optimal sizing.
- Recommended maximum flow velocity: 6.0 m/sec; 20 ft/sec.
- Minimum operating pressure: 0.7 bar; 10 psi. For lower pressure requirements consult factory.

For detailed Engineering & Specification data, IOM and CAD Drawings, visit the Model Page on the [BERMAD](https://www.bermad.com) website.