

PRESSURE RELIEF/SUSTAINING VALVE

Model 730-M5-M5M-M5L

Pressure relief/sustaining hydraulically operated control valve that can fulfill either of two separate functions: When installed in-line, it sustains minimum pre-set, upstream (back) pressure regardless of fluctuating flow or varying downstream pressure. When installed as a "branched from the line" circulation valve it relieves excessive line pressure when above maximum pre-set.

The BERMAD 700 Series large control valves are hydraulically operated and diaphragm actuated. Their unique hydro-dynamic globe design with an open plug ensures high flow capabilities.



Features & Benefits



- Hydrodynamic wide globe valve body provides:
 - Higher flow coefficient (Kv; Cv) than standard globe valves
 - Higher resistance to cavitation damage
- In-line serviceable
- Valves are suitable for working with all types of command: Hydraulic, Electric and Pneumatic.
- Self-operated valves that can work without an external source of power
- Wide range of options and accessories:
 - Visual position indicator
 - Limit switches
 - Analog opening output
 - Large selection of control accessories
 - Large inspection and service ports (700-M5L)

Typical Applications


- Water delivery system - Prioritizing upstream demand to maintain pressure
- Pumping stations - Ensure operating point on pump curve
- Pumping stations - Circulation during low demand
- District Cooling Plants (DCP) - Process control

Typical Installation



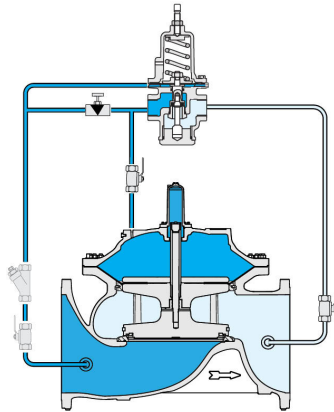

Closed

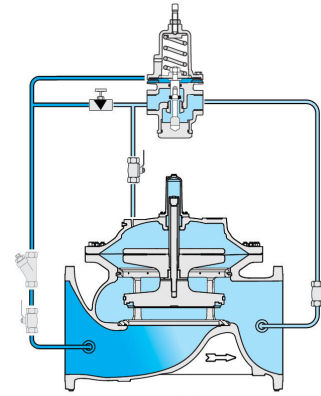

Regulating

Main Valve

Size Range: 20"-36"; DN500-900

Pattern: Globe

Pressure Rating: 25 bar

End Connection: Flanged

Temperature Rating: 80°C

For 60–80°C consult factory

Standard Materials:

Body & Cover: Ductile Iron

Cover Bolts: Stainless Steel

Internals: Epoxy coated Ductile Iron, Stainless Steel & Tin Bronze

Diaphragm: Fabric-reinforced synthetic rubber

Seals: Synthetic rubber

Coating: Dark blue Fusion bonded epoxy

For other materials contact BERMAD

Control System

Standard Materials:

Accessories: Stainless Steel, Bronze & Brass

Tubing: Stainless Steel or Copper

Fittings: Stainless Steel or Brass

Pilot standard materials:

Body: Stainless Steel, Bronze & Brass

Elastomers: Synthetic Rubber

Internals and Spring: Stainless Steel

Pilot Options:

Various pilots and calibration springs are available. Select according to valve size and operating conditions. For more details check relevant pilots product pages.

Notes

- Inlet Pressure, Outlet Pressure and Flow-rate are required for optimal sizing and cavitation analysis.
- Recommended maximum flow velocity: 6.0 m/sec; 20 ft/sec.
- Minimum operating pressure: 0.7 bar; 10 psi. For lower pressure requirements consult factory.

For detailed Engineering & Specification data, IOM and CAD Drawings, visit the Model Page on the [BERMAD](https://www.bermad.com) website.