


LEVEL CONTROL VALVE

with Bi-Level Electric Float

Model 750-65-M5-M5M-M5L

Hydraulically operated control valve that controls reservoir filling and reservoir level. Reservoir filling is in response to a Bi-level electric float switch signal opening at a pre-set low level and shutting off at a preset high level.

The BERMAD 700 Series large control valves are hydraulically operated and diaphragm actuated. Their unique hydro-dynamic globe design with an open plug ensures high flow capabilities.




Features & Benefits



- Hydrodynamic wide globe valve body provides:
 - Higher flow coefficient (Kv; Cv) than standard globe valves
 - Higher resistance to cavitation damage
- In-line serviceable
- Valves are suitable for working with all types of command: Hydraulic, Electric and Pneumatic.
- Self-operated valves that can work without an external source of power
- Wide range of options and accessories:
 - Visual position indicator
 - Limit switches
 - Analog opening output
 - Large selection of control accessories
 - Large inspection and service ports (700-M5L)

Typical Applications


- Level control for water reservoirs
- Bi-Level control for water refreshment and silent operation

Typical Installation

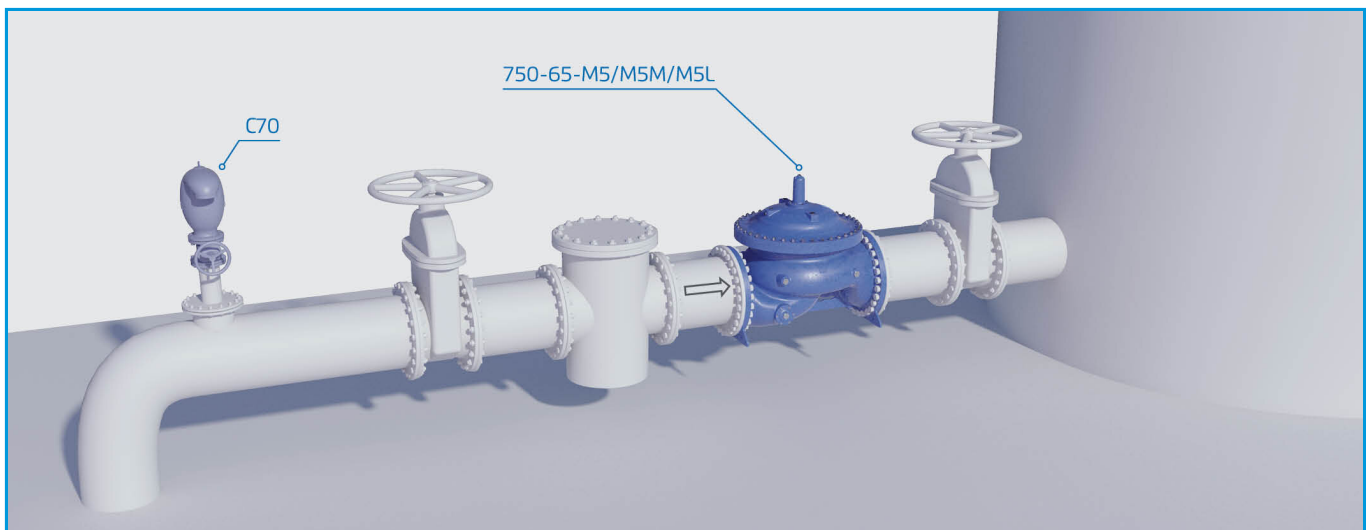

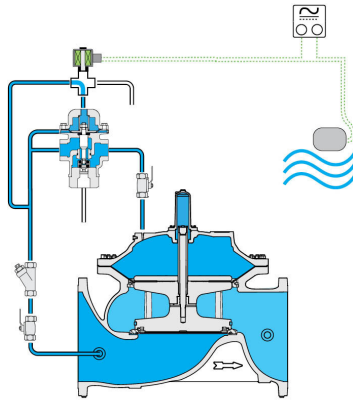

Closed

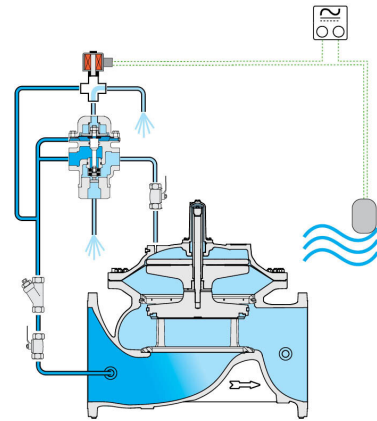

Open

Main Valve

Size Range: 20"-36"; DN500-900

Pattern: Globe

Pressure Rating: 400 psi

End Connection: Flanged

Temperature Rating: 180°F

For 140–180°F consult factory

Standard Materials:

Body & Cover: Ductile Iron

Cover Bolts: Stainless Steel

Internals: Epoxy coated Ductile Iron, Stainless Steel & Tin Bronze

Diaphragm: Fabric-reinforced synthetic rubber

Seals: Synthetic rubber

Coating: Dark blue Fusion bonded epoxy

For other materials contact BERMAD

Control System

Standard Materials:

Accessories: Stainless Steel, Bronze & Brass

Tubing: Stainless Steel or Copper

Fittings: Stainless Steel or Brass

Solenoid standard materials:

Body: Brass or Stainless Steel

Elastomers: NBR or FPM

Enclosure: Molded Epoxy

Solenoid Electrical Data:

Voltages:

(AC): 24, 110-120, 220-240, (50-60Hz)

(DC): 12, 24, 110, 220

Power Consumption:

(AC): 30VA, inrush; 15VA (8W), holding or 70VA, inrush; 40VA (17.1W), holding

(DC): 8-11.6W

Values may vary according to specific solenoid model.

For more details check solenoid product page.

Float Switch:

Max Current: 16A @ 250 V

Fluid Specific Weight: 0.95-1.1

Working Temperature: Water up to 65°C (140°F)

Dimensions:

Cable Length - 10 m; 32.8 ft

Length - 103.5 mm; 4" Width - 78 mm; 3"

Notes

- Inlet Pressure, Outlet Pressure and Flow-rate are required for optimal sizing.
- Recommended maximum flow velocity: 6.0 m/sec; 20 ft/sec.
- Minimum operating pressure: 0.7 bar; 10 psi. For lower pressure requirements consult factory.
- See BERMAD float installation recommendation.

For detailed Engineering & Specification data, IOM and CAD Drawings, visit the Model Page on the [BERMAD](https://www.bermad.com) website.



www.bermad.com

The information contained herein may be changed by BERMAD without notice. BERMAD shall not be held liable for any errors.

© Copyright 2015-2025 BERMAD CS Ltd

October 2025