

AC powered EFM

Model MUT2200-MC608

The MUT2200 with MC608 is a mains powered electromagnetic water meter for use in district metering areas (DMA), water abstraction, and custody transfer measurement of potable water (OIML R49), irrigation, and many other applications. Unlike other water meters, the MUT2200 is a maintenance-free meter, offering a much wider range of flow, in a compact or remote mounted version. Thanks to the optimized flow profile, the MUT2200 can be installed virtually anywhere with minimal straight inlet or outlet runs. With optional pressure and temperature sensors, GSM/GPRS integrated modem and 12...24Vdc power source, the meter is the perfect solution for leak detection, and pressure management systems. The highly robust structure, allows burial installation or the use in flooded areas. A full on-site verification without process interruption can be carried out using the Field Vericator service tool.



Features & Benefits

- No moving parts
- Neglectable pressure drop
- Long lasting stability and precision
- Zero maintenance
- Extremely sturdy structure
- High chemical resilience
- Wider range of measurement

Typical Applications

- District metering of potable water
- Distribution, municipal water
- Industrial waste water
- Industrial process liquids, muds and concretes
- Leak detection and monitoring
- Fiscal measures, custody transfer
- Irrigation
- Booster pump stations
- Lift stations

High performances to a low cost of ownership:

Capability to read flow velocities of 0.015 m/s (MID-001 OIML R49 certified), within Class 2 accuracy

Multiple outputs:

pulse, analog 4-20mA, Modbus, frequency, Hart protocol and programmable output

No data lost:

Data automatically stored in the internal EEPROM memory. Up to 100.000 lines of active datalogging

Information always available:

Add-on communication module GSM/GPRS automatically sends the information via SMS, e-mail or on a website portal www.euromagdata.com with personal ID and password. Accessible also from smart phones and tablets. Configurable FTP communication

Empty pipe detection:

Empty pipe electrode supplied as standard ($\geq$ DN65). Empty pipe detection on measuring electrodes standard for all sizes

Flow - pressure – temperature: all at the same time:

Add on modules of temperature and pressure readying make the MUT2200 with MC608 one of the most complete electromagnetic flowmeter available in the market

Easy management, easy programming:

A software is supplied with the unit to allow users to communicate with the MC608 via ICOM port to any pc, lap top or windows tablet.

Certifications and compliance:

OIML R49 (on request) / EX - IEC IECEx (on request and only separate version) / NSF ANSI61 (On model MUT2200US)

Always verified:

The Euromag FIELD VERIFICATOR is available for full on-site verification, without interruption of the process

Convertor Specifications

Temperature	Ambient: -20 ... +60 C° (-4 ... +140 F) Media -25 ... 80 C° (-13 ... +176 F) Storage -40 ... +70 C° (-22 ... +158 F)
Flow Units	ml, cl, dl, l, dal, hl, m3, in3, ft3, gal, USgal, bbl, oz + Custom value
Totalizers	5 (2 positive, 2 negative, 1 NET)
Alarms and status	Status icon displayed and alarm logged in the datalogger
Self diagnostic	Alarms available: excitation failure pulse overlapped empty pipe on the 4th electrode measurement error high temperature
External verification	Field vericator available for calibration verification and electronic status
Software for communication and programming	Commissioning (equal settings of meters) - Data print for documentation - Data export (CSV file) - Firmware update - Read instant flowrate - Read and write all non-volatile parameters - Download internal datalogger - View instrument event logger

Sensor Specifications

Flow tube material	AISI 304 (std), AISI 316
Flanges material	Carbon steel painted (std), AISI 304, AISI 316
Electrodes material	Electrodes material Hastelloy C (std), Hastelloy B, Titanium, Tantalio, Platinum
Internal lining and liquid temperature	Internal lining: Liquid temperature: PTFE Standard -40 /+130°C (up to +180° on request) Ebonite -40°C / +80°C
Available Sizes	½"-80" ; DN15-2000 mm
Flange standards available	EN1092-1, ANSI 150, ANSI 300, ANSI 600, ANSI 900, DIN 2501, BS 4504, AS 2129 (TABLE D - E - F), AS 4087, ISO 7005-1, KS 10K
Protection Degree	IP68 1.5 m continuous immersion (EN 60529)
Electrical connections	Cable glands M20 x 1.5 + terminal block + sealing resin


The electromagnetic flowmeter designed for the toughest applications



Modbus

Measuring Accuracy

Each flowmeter is standard wet calibrated under reference conditions by direct volume comparison. The performance of the flowmeter is defined and documented in an individual calibration certificate. Accuracy $\pm 0.2\% \pm 0.0066 \text{ ft/s}$ ($\pm 0.2\% \pm 0.0033 \text{ ft/s}$ on request).

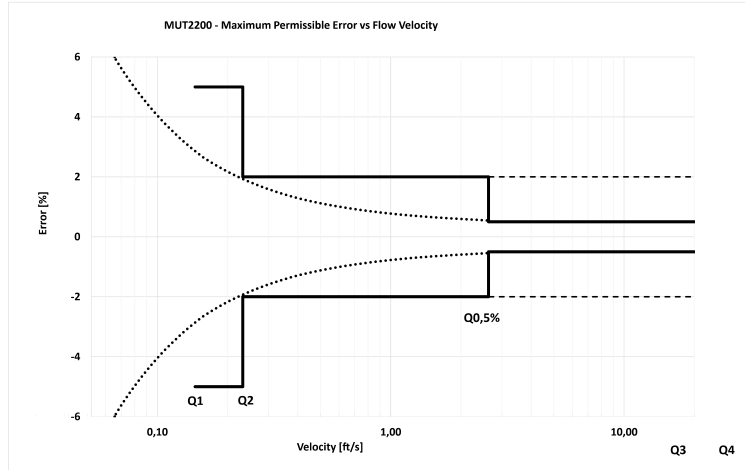

Flow Rate

Size Q @ (gpm)	DN25 1"	DN32 1¼"	DN40 1½"	DN50 2"	DN65 2½"	DN80 3"	DN100 4"	DN125 5"	DN150 6"	DN200 8"	DN250 10"	DN300 12"	DN350 14"	DN400 16"	DN450 18"
Q1 Minimum Flow	0.35	0.35	0.56	0.88	1.41	2.22	3.52	5.64	8.81	14.09	22.19	35.22	56.36	56.36	110.07
Q2 Transitional Flow	0.56	0.56	0.9	1.41	2.25	3.55	5.64	9.02	14.09	22.54	35.50	56.36	90.17	90.17	176.11
Q3 Permanent Flow	44.03	44.03	70.45	110.07	176.11	277.38	440.29	704.46	1,100.72	1,761.15	2,773.81	4,402.87	7,044.59	7,044.59	11,007.17
Q4 Maximum Flow (Short Time)	55.04	55.04	88.06	137.59	220.14	346.73	550.36	880.57	1,375.90	2,201.43	3,467.26	5,503.58	8,805.73	8,805.73	13,758.96

Size Q @ (gpm)	DN500 20"	DN600 24"	DN700 28"	DN800 32"	DN900 36"	DN1000 40"	DN1200 48"	DN1400 56"	DN1500 60"	DN1600 64"	DN1800 72"	DN2000 80"
Q1 Minimum Flow	110.07	220.14	220.14	440.29	440.29	880.57	1,408.92	2,201.43	3,522.29	5,547.61	8,805.73	14,089.17
Q2 Transitional Flow	176.11	352.23	352.23	704.46	704.46	1,408.92	2,254.27	3,522.29	5,635.67	8,876.18	14,089.17	22,542.68
Q3 Permanent Flow	11,007.17	17,611.47	17,611.47	27,738.06	27,738.06	44,028.67	70,445.87	110,071.68	176,114.68	277,380.62	440,286.70	704,458.72
Q4 Maximum Flow (Short Time)	13,758.96	22,014.34	22,014.34	34,672.58	34,672.58	55,035.84	88,057.34	137,589.59	220,143.35	346,725.78	550,358.38	880,573.40

Installation Recommendations

- The arrow on water meter body must be in the same direction with the flow.
- Prior to installation, flush the line to remove debris.
- The water meter must be filled with water to operate.

