

HYDRAULIC PRESSURE CONTROL DELUGE VALVE WITH LOCAL RESET

Model FP-400Y-1MC

The BERMAD model 400Y-1MC is an elastomeric, hydraulic, line pressure operated deluge valve, designed specifically for advanced fire protection systems and the latest industry standards. The 400Y-1MC is activated by a hydraulic relay valve which latches the deluge valve open until reset locally.

An integral pressure reducing pilot valve ensures a precise, preset and stable downstream system water pressure.

The optional valve position indicator can include a limit switch suitable for Fire & Gas valve position monitoring systems.

The 400Y-1MC is ideal for systems with open nozzles with a high pressure water supply for water or foam discharge.



Features & Benefits

- Safety and reliability
 - Time proven, simple design with a fail safe actuation
 - Single piece rugged elastomer, VRSD technology
 - Obstacle-free, uninterrupted flow path
 - No mechanical moving parts
 - Latches open: remains open until reset locally
 - Valve position limit switches (optional)
- High performance
 - Very high flow efficiency
 - Straight through Y type body
 - Approved for PN25 / 365 psi
- Specifically-designed for fire protection
 - Face-to-face length standardized to ISO 5752 EN 558-1
 - Meets the requirements of the industry standards
- Quick and easy maintenance
 - In-line serviceable
 - Fast and easy cover removal
 - Swivel mounted drain valves (for valves 3" and larger)

Typical Applications

- High Pressure Water Supply
- Automatic water spray systems
- Foam applications
- Corrosive water systems

Approvals



UL-Listed
Special System Water Control
Valves, Deluge Type (VLFT)
Sizes 1½" - 16"



FM Approved
for Deluge Sprinkler Systems
Sizes 1½" - 8"



Det Norske Veritas
Type Approval
Sizes 1½" to 16"



ABS
American Bureau of Shipping
Type Approval
Sizes 1½" - 12"





Lloyd's Register
Type Approval
Sizes 1½" - 10"

Additional Features

- Valve position limit switches
- Water motor alarm
- Seawater compatibility
- Drain valve/s inlet/outlet
- Alarm pressure switch
- Adjustable pilot line water column compensation
- Corrosion resistant zinc based high build epoxy coating

Operation

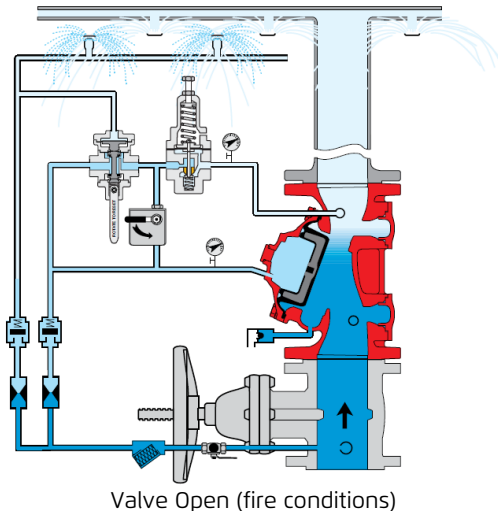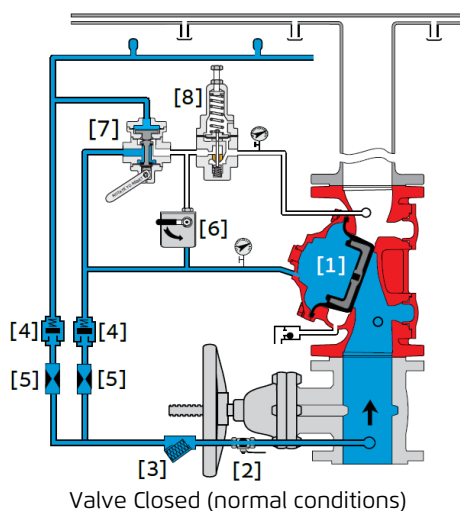


The BERMAD model 400Y-1MC is held closed by water pressure in the control chamber [1]. Upon release of pressure from the control chamber, the valve opens.

Under NORMAL conditions, water pressure is supplied to the control chamber via the priming line [2] and strainer [3] and is then trapped in the control chamber by a check valve [4], restriction orifice [5], manual emergency release [6] and a latching relay valve (URV - M) [7], that is held closed by water pressure supplied by the pilot line. The water pressure trapped in the control chamber of the deluge valve holds the diaphragm against the valve seat sealing it drip-tight and keeping the system pipes dry.

Under FIRE conditions, water pressure is released from the control chamber, either with the manual emergency release, or by the URV switching to the release position in response to a drop in pressure in the pilot line caused by one or more of the fusible plugs opening. This latches the 400Y 1MC deluge valve open, allowing water to flow into the system.

System P&ID

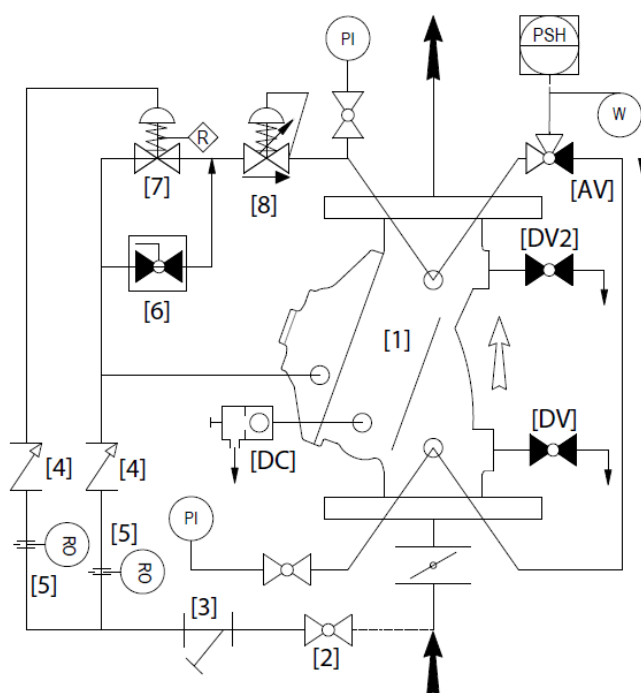

Components	
1	BERMAD 400Y Deluge Valve
2	Priming Ball Valve
3	Priming Strainer
4	Check Valve
5	Restriction Orifice
6	Manual Emergency Release
7	URV-2-M Relay Valve
8	Pressure Reducing Pilot

Optional System Items	
PS	Pressure Switch
W	Water Motor Alarm
ZS	Limit Switch Assembly
I	Visual Valve Position indicator
DV2	Downstream Drain valve
DV	Drain Valve*
PI	Pressure Gauge*
AV	3-way Alarm Test Valve*
DC	Automatic Drip Check Valve*

* Included with suffix A in valve code (drain and indicating components)
See code designations and "factory supplied additional items" on page 4

System Installation

A typical installation of the BERMAD model 400Y-1MC features automatic actuation via a hydraulic universal relay valve, triggered by a fusible plug loop. A pressure reducing pilot valve integrated in the trim ensures a precise and stable pre-set downstream pressure. When fitted with a limit switch the valve can send a feedback signal to a remote valve position monitoring system.

Optional System Items



Single Ex d
Proximity S.S.316
Limit Switch



Visual Position
Indicator, Linear




Exd Pressure
Switch - Stainless
Steel Enclosure for
Harsh
Environments



Pressure Gauge



Basket Strainer -
60F

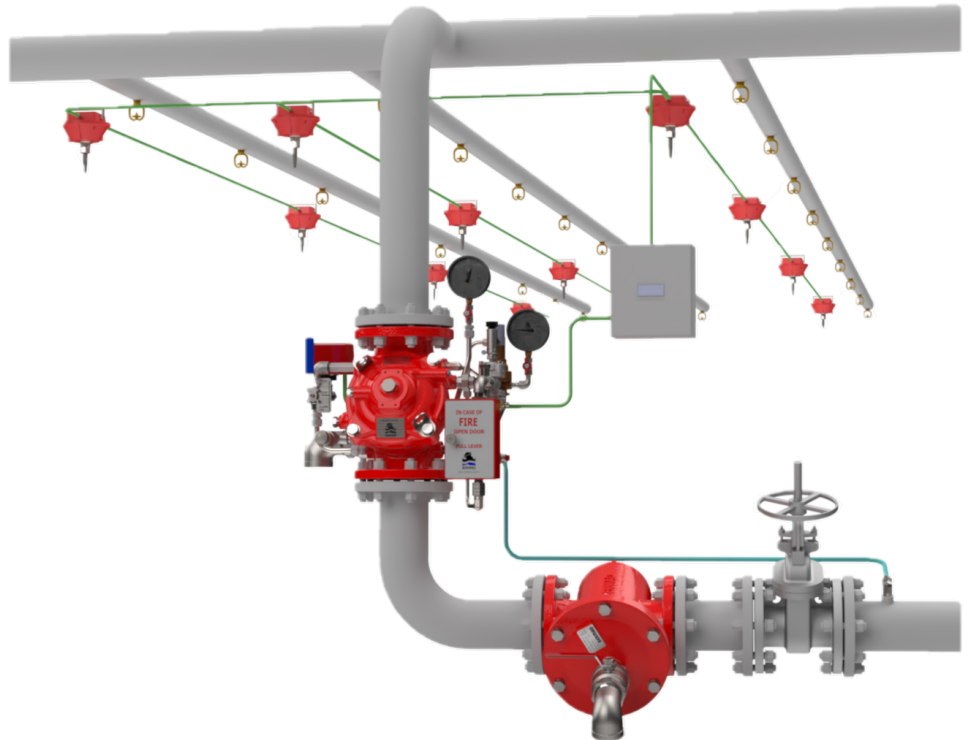

Suggested Specifications

The deluge valve shall be UL-listed, 365-psi/25-bar rated, with a straight-through Ytypebody.

The valve shall have an unobstructed flow path, with no stem guide or supporting ribs.

The deluge valve shall have no mechanical moving parts, and the actuation shall utilize a single-piece diaphragm assembly of VRSD technology.

The valve shall be coated internally and externally with UV protection. Optional: C5-VH grade of ISO-12944 standard against corrosive conditions.

The control trim shall include a pressure control pilot valve, an auxiliary latching relay valve, a manual emergency release unit, a Y-type strainer, two 4-inch pressure gauges, an automatic drip-check with manual override, and a ball drain valve with a 360 degree swivel.

A valve position indicator shall be provided, and equipped with two proximity limit switches.

Removing the valve cover for full inspection and maintenance shall be in-line and not require removal of the control trim.

The deluge valve and control trim shall be pre-assembled and hydraulically tested by a UL/FM and ISO 9000, 9001 certified factory.

Technical Data

Available Sizes:

Flanged- 1½, 2, 2½, 3, 4, 6, 8, 10, 12, 14 & 16"

Grooved- 1½, 2, 2½, 3, 4, 6, 8 & 10"

Pressure Rating:

ANSI#150 - 17.2 bar | 250 psi

ANSI#300 - 1½" to 10" - 25 bar | 365 psi

ANSI#300 - 12" to 16" - 20 bar | 300 psi


Grooved - 17.2 / 25 bar | 250 / 365 psi

Setting range: 4-12 bar | 60-175 psi

Elastomer:

HTNR - Fabric Reinforced High Temperature

Compound - See engineering data

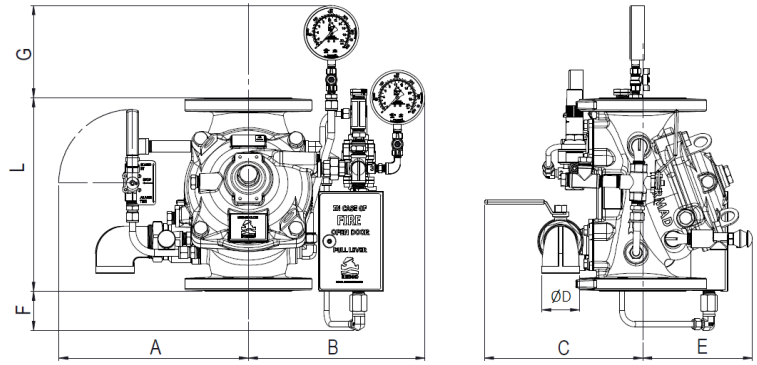

Valve Size	L #150 mm in	L Grooved mm in	L #300 mm in	A mm in	B mm in	C mm in	ØD in	E mm in	F mm in	G mm in	Weight #150 kg lb	Weight #300 kg lb
DN40 1½"	230 9.1	230 9.1	230 9.1	293 11.5	299 11.8	177 7	¾"	215 8.5	167 6.6	130 5.1	20 44	21 46
DN50 2"	230 9.1	230 9.1	238 9.4	293 11.5	299 11.8	177 7	¾"	215 8.5	167 6.6	130 5.1	20 44	21 46
DN65 2½"	235 9.3	235 9.3	241 9.5	296 11.6	299 11.8	183 7.2	1½"	215 8.5	164 6.5	128 5	25 55	27 59
DN80 3"	310 12.2	310 12.2	326 12.8	313 12.3	311 12.2	221 8.7	1½"	186 7.3	97 3.8	100 3.9	38 84	39 86
DN100 4"	350 13.8	350 13.8	368 14.5	343 13.5	300 11.8	287 9.7	2"	199 7.8	71 2.8	167 6.6	52 114	59 130
DN150 6"	480 18.9	480 18.9	506 19.9	358 14	373 14.7	302 11.9	2"	234 9.2	-	35 1.4	100 220	120 264
DN200 8"	600 23.6	600 23.6	626 24.7	392 15.4	450 17.7	317 12.5	2"	301 11.8	-	-	169 372	189 416
DN250 10"	730 28.7	730 28.7	730 28.7	406 16	450 17.7	317 12.5	2"	301 11.8	-	-	202 444	238 524
DN300 12"	850 33.5	-	888 35	478 18.8	515 20.2	380 15	2"	441 17.4	-	-	359 790	399 878
DN350 14"	980 38.6	-	980 38.6	478 18.8	515 20.2	379 14.9	2"	441 17.4	-	-	396 871	456 1003
DN400 16"	1100 43.3	-	1100 43.3	478 18.8	515 20.2	405 16.1	2"	417 15.9	-	-	446 981	565 1234

IMPORTANT: Dimensions for the trim envelope or extents refer to a vertical orientation and may vary with specific component positioning - Apart from the "L" dimension, allow a tolerance of at least ±15%

Valve Code Designations

FP	6"	400Y-1MC	M6	03	V	C	A5	ER	NN	N6nW
----	----	----------	----	----	---	---	----	----	----	------

Category	Code
Standard	FP
Seawater	FS
Foam	FC

Valve Size	Code
1½"	40 mm
2"	50 mm
2½"	60 mm ⁽⁶⁾
3"	80 mm
4"	100 mm
6"	150 mm
8"	200 mm
10"	250 mm
12"	300 mm
14"	350 mm
16"	400 mm

Pilot Line Trip Point Setting	Code
Elevation below 10m/33ft	00
Elevation below 35m/115ft	M6
Elevation below 70m/230ft	M7

Additional Feature	Code
Closing Speed Control	01
Opening Speed Control	02
Opening & Closing Speed Control	03
None	-

Installation	Code
Vertical	V
Horizontal	H

Material Body & Cover ⁽¹⁾	Code
Ductile Iron A356 ⁽²⁾	C
Steel ASTM A216 WCB ⁽²⁾	S
Stainless Steel 316	N
Nickel Al Bronze C95800	U
Super Duplex Grade 5A	D

End Connection	Code
ANSI#150RF	A5
ANSI#150FF	a5
ANSI#300RF	A3
ANSI#300FF	a3
ISO PN16	16
ISO PN25	25
Grooved Class 250psi/17.2bar	VI
Grooved Class 365psi/25bar	V2

Coating	Code
High Build Epoxy	ER
Zinc Based High Build Epoxy ⁽⁵⁾	ZR
Uncoated	UC

Tubing & Fittings	Code
Stainless Steel 316	NN
Monel 400	MM
Super Duplex	DD

Factory Supplied Additional Items	Code
General Purpose NEMA-4 Pressure Switch	P
Ex Proof NEC, Div.1 Pressure Switch ⁽³⁾	P7
Ex d ATEX Pressure Switch ⁽³⁾	P9
Ex d Pressure Switch, SS316 Enclosure ⁽³⁾	P9Jn
Ex d Pressure Switch, SS316 Enclosure, P9mJn	P9mJn
Single Limit Switch, General Purpose	S
Single Ex d Proximity limit Switch	S9
Double Ex d Proximity Limit Switch	SS9
Double Ex d Proximity Limit Switch with SS316 Junction Box	SS9Jn
Pressure Gauge Assembly ⁽³⁾	6
S.S Glycerin Pressure Gauge Assembly ⁽³⁾	6n
Monel Pressure Gauge Assembly ⁽³⁾	6m
Drain Valve	DV
Water Motor Alarm Assembly ⁽³⁾	W
Special Elastomer	E
Large Control Filter	F
Valve Position Indicator	I
S.S 316 Trim Accessories	N
Pressure Transmitter ⁽³⁾	Q
Drain and Indicating Components	A

*More options available – consult BERMAD