

ELECTRICALLY CONTROLLED DELUGE VALVE WITH LOCAL RESET

Model FP-400Y-2M

The BERMAD model 400Y-2M is an elastomeric, hydraulic, line pressure operated deluge valve, designed specifically for advanced fire protection systems and the latest industry standards. The 400Y-2M is activated by a 2-Way solenoid valve. Once open the 400Y-2M latches open until locally reset.

The optional valve position indicator can include a limit switch suitable for Fire & Gas monitoring systems.

The 400Y-2M is ideal for systems with open nozzles for water or foam discharge and is available with electrical components to suit any hazardous location.



Features & Benefits

- Safety and reliability
 - Time proven, simple design with a fail safe actuation
 - Single piece, rugged elastomeric diaphragm seal - VRSD technology
 - Obstacle-free, uninterrupted flow path
 - No mechanical moving parts
 - Latches open: remains open until reset locally
 - Valve position limit switches (optional)
 - Local valve position indicator beacon (optional)
- High performance
 - Very high flow efficiency
 - Straight through Y type body
 - Approved for PN25 / 365 psi
- Specifically-designed for fire protection
 - Face-to-face length standardized to ISO 5752 EN 558-1
 - Meets the requirements of the industry standards
- Quick and easy maintenance
 - In-line serviceable
 - Fast and easy cover removal
 - Swivel mounted drain valves (for valves 3" and larger)

Typical Applications

- Electric fire detection systems with control panels
- Automatic water spray systems
- Foam applications
- Corrosive water systems

Approvals



UL-Listed
Special System Water Control
Valves, Deluge Type (VLFT)
Sizes 1½" - 16"



FM Approved
for Deluge Sprinkler Systems
Sizes 1½" - 8"



ABS
American Bureau of Shipping
Type Approval
Sizes 1½" - 12"



Det Norske Veritas
Type Approval
Sizes 1½" to 16"





Lloyd's Register
Type Approval
Sizes 1½" - 10"

Additional Features

- Valve position limit switches
- Valve Position Indicator
- Seawater compatibility
- Drain valve/s inlet/outlet
- Corrosion resistant zinc based high build epoxy coating

Operation

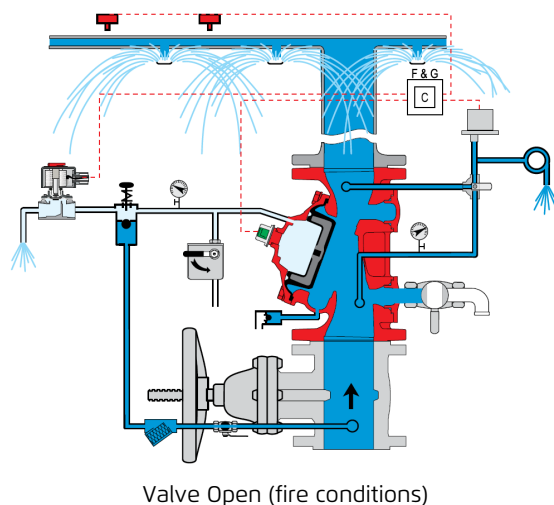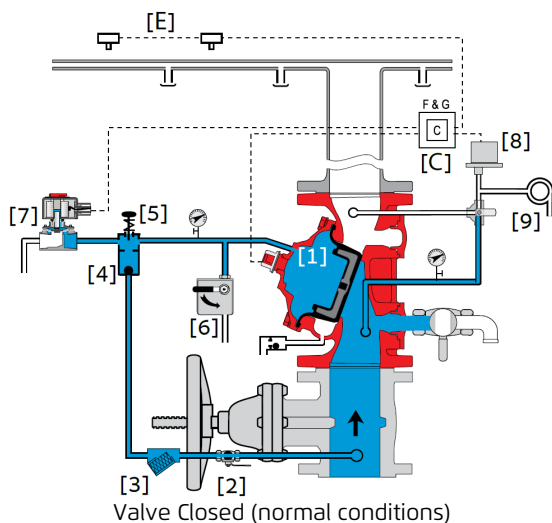


The **BERMAD model 400Y-2M** is held closed by water pressure in the control chamber [1]. Upon release of pressure from the control chamber, the valve opens.

Under NORMAL conditions, water pressure is supplied to the control chamber via the priming line [2] and strainer [3], and is then trapped in the control chamber by the check valve feature [4] of the easy-lock manual reset [5], the closed manual emergency release [6], and the closed Normally De-Energized solenoid valve [7]. The water pressure trapped in the control chamber of the deluge valve holds the diaphragm against the valve seat, sealing it drip-tight and keeping the system pipes dry.

Under FIRE conditions, water pressure is released from the control chamber, either with the manual emergency release, or by the solenoid energizing in response to a signal from the heat detection system [E] by way of the fire & gas control system [C]. This opens the deluge valve allowing water to flow into the system piping and to the alarm device. The 400Y 2M latches open until reset locally by depressing the Easy-Lock button.

System P&ID

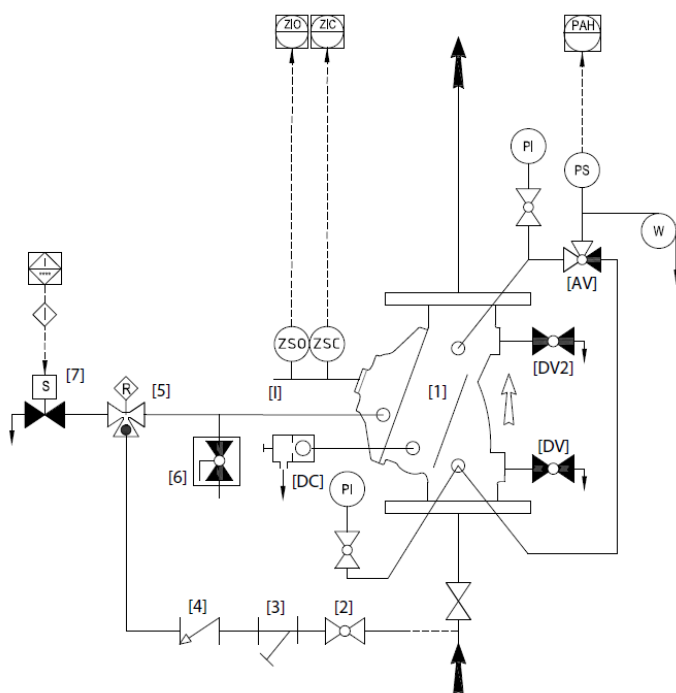

Components	
1	BERMAD 400Y Deluge Valve
2	Priming Ball Valve
3	Priming Strainer
4	Check Valve
5	Easy-Lock – Manual Reset
6	Manual Emergency Release
7	2-Way Solenoid

Optional System Items	
PS	Pressure Switch
W	Water Motor Alarm
ZS	Limit Switch Assembly
DV2	Downstream Drain valve
I	Visual Valve Position indicator
DV	Drain Valve*
PI	Pressure Gauge*
AV	3-way Alarm Test Valve*
DC	Automatic Drip Check Valve*

* Included with suffix A in valve code and mandatory for FM approval (drain and indicating components) See code designations on page 4 "Factory Supplied Additional Items"

System Installation

A typical installation of the BERMAD model 400Y-2M, features automatic actuation by way of a 2-Way solenoid. It can also be triggered electrically by a signal from a fire & gas control system or an on-site emergency push-button. When open and fitted with a limit switch the valve can send a feedback signal to a remote valve status monitoring system.

Optional System Items



Pressure Gauge



Visual Position Indicator




Rotating Limit Switch Box



Exd Pressure Switch - Stainless Steel Enclosure for Harsh Environments



Basket Strainer - 60F

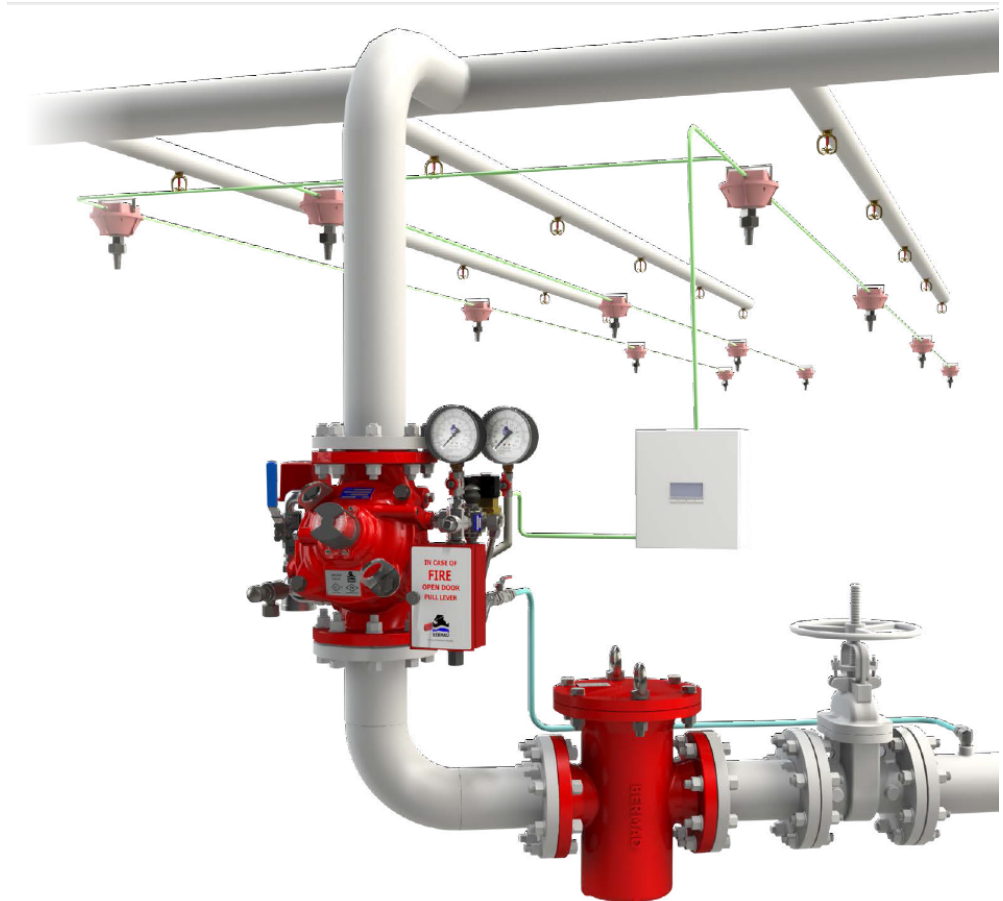

Suggested Specifications

The deluge valve shall be UL-listed and FM-approved, 365-psi/25-bar rated, with a straight-through Ytypebody.

The valve shall have an unobstructed flow path, with no stem guide or supporting ribs.

The deluge valve shall have no mechanical moving parts, and the actuation shall utilize a single-piece diaphragm assembly of VRSD technology.

The valve shall be coated internally and externally with UV protection. Optional: C5-VH grade of ISO-12944 standard against corrosive conditions.

The solenoid valve shall be a 2-way FM and UL429A-listed for 365 psi/25 bar with 65% of the rated voltage.

The control trim shall include a manual emergency release unit, an Easy-Lock latching valve, a Y-type strainer, two 4-inch pressure gauges, an automatic drip-check with manual override, and a ball drain valve with a 360 degree swivel.

A valve position indicator shall be provided, and equipped with two proximity limit switches.

Removing the valve cover for full inspection and maintenance shall be in-line and not require removal of the control trim.

The deluge valve and control trim shall be pre-assembled and hydraulically tested by a UL/FM and ISO 9000, 9001 certified factory.

Technical Data

Available Sizes:

Flanged- 1½, 2, 2½, 3, 4, 6, 8, 10, 12, 14 & 16"

Grooved- 1½, 2, 3, 4, 6, 8 & 10"

Pressure Rating:

ANSI#150 - 17.2 bar | 250 psi

ANSI#300 - 1½" to 10" - 25 bar | 365 psi


ANSI#300 - 12" to 16" - 20 bar | 300 psi

Grooved - 17.2 / 25 bar | 250 / 365 psi

Elastomer:

HTNR - Fabric Reinforced High Temperature

Compound - See engineering data

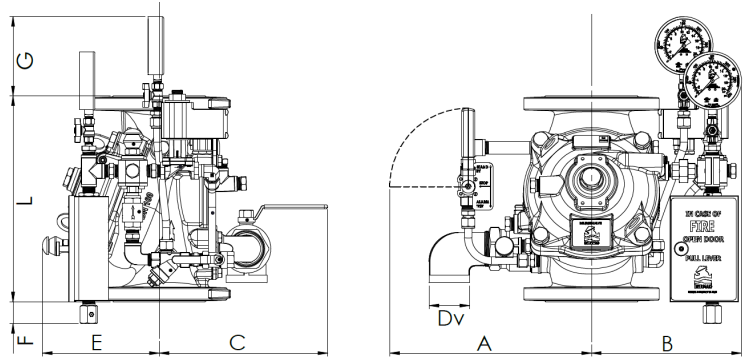

Valve Size	L #150 mm in	L Grooved mm in	L #300 mm in	A mm in	B mm in	C mm in	øD in	E mm in	F mm in	G mm in	Weight #150 kg lb	Weight #300 kg lb
DN40 1½"	230 9.1	230 9.1	230 9.1	293 11.5	187 7.4	177 7	¾"	215 8.5	133 5.2	178 7	19 42	21 46
DN50 2"	230 9.1	230 9.1	235 9.3	330 10.8	212 8.3	241 9.5	¾"	180 7.1	160 6.3	141 5.6	20 43	22 48
DN65 2½"	235 9.3	235 9.3	241 9.5	296 11.7	187 7.4	183 7.2	1½"	215 8.5	131 5.2	157 6.2	24 53	27 59
DN80 3"	310 12.2	310 12.2	326 12.8	334 13.1	270 10.6	274 10.8	1½"	185 7.3	90 3.5	131 5.2	34 76	35 77
DN100 4"	350 13.8	350 13.8	368 14.5	342 13.5	280 11	290 11.4	2"	195 7.7	63 2.5	118 4.6	44 98	51 113
DN150 6"	480 18.9	480 18.9	506 19.9	395 14.6	335 13.2	305 12	2"	228 9	-	70 2.7	88 193	108 238
DN200 8"	600 23.6	600 23.6	626 24.7	425 16.7	363 14.3	320 12.6	2"	295 11.6	-	45 1.8	151 332	171 376
DN250 10"	730 28.7	730 28.7	730 28.7	425 16.7	363 14.3	320 12.6	2"	295 11.6	-	-	181 398	217 477
DN300 12"	850 33.5	-	888 35	538 21.2	476 18.7	383 15.1	2"	441 17.4	-	-	324 713	364 801
DN350 14"	980 38.6	-	980 38.6	538 21.2	476 18.7	383 15.1	2"	441 17.4	-	-	357 785	429 944
DN400 16"	1100 43.3	-	1100 43.3	538 21.2	476 18.7	408 16.1	2"	415 16.3	-	-	403 887	523 1151

IMPORTANT: Dimensions for the trim envelope or extents refer to a vertical orientation and may vary with specific component positioning - Apart from the "L" dimension, allow a tolerance of at least ±15%

Valve Code Designations

FP	6"	400Y-2M	03	V	C	A5	ER	4DC	NN	N6nW
----	----	---------	----	---	---	----	----	-----	----	------

Category	Code
Standard	FP
Seawater	FS
Foam	FC

Valve Size	
1½"	40 mm
2"	50 mm
2½"	60 mm ⁽⁶⁾
3"	80 mm
4"	100 mm
6"	150 mm
8"	200 mm
10"	250 mm
12"	300 mm
14"	350 mm
16"	400 mm

Installation	Code
Vertical	V
Horizontal	H

Material Body & Cover ⁽¹⁾	Code
Ductile Iron A356 ⁽²⁾	C
Steel ASTM A216 WCB ⁽²⁾	S
Stainless Steel 316	N
Nickel Al Bronze C95800	U
Super Duplex Grade 5A	D

End Connections	Code
ANSI#150RF	A5
ANSI#150FF	a5
ANSI#300RF	A3
ANSI#300FF	a3
ISO PN16	16
ISO PN25	25
Grooved Class 250psi/17.2bar ⁽⁵⁾	VI
Grooved Class 365psi/25bar ⁽⁵⁾	V2

Coating	Code
High Build Epoxy	ER
Zinc Based High Build Epoxy ⁽⁵⁾	ZR
Uncoated	UC

Voltage - Main Valve N.O or N.C *	Code
24VDC - N.C.	4DC
24VDC - N.O.	4DO
110VDC - N.C.	5DC
110VDC - N.O.	5DO
110 - 120/AC - N.C.	5AC
110 - 120/AC - N.C.	5AO
220 - 240/AC - N.C.	2AC
221 - 240/AC - N.C.	2AO

* NO or NC refers to the main valve status when the Solenoid is de-energized

Tubing & Fittings	Code
Stainless Steel 316	NN
Monel 400	MM
Super Duplex	DD

Additional Feature	Code
Closing Speed Control	01
Opening Speed Control	02
Opening & Closing Speed Control	03
None	-

Factory Supplied Additional Items	Code
General Purpose NEMA-4 Pressure Switch ⁽³⁾	P
Ex Proof NEC, Div.1 Pressure Switch ⁽³⁾	P7
Ex d ATEX Pressure Switch ⁽³⁾	P9
Ex d Pressure Switch, SS316 Enclosure ⁽³⁾	P9Jn
Ex d Pressure Switch, SS316 Enclosure Monel Sensor ⁽³⁾	P9mJn
Single Limit Switch, General Purpose	S
Single Ex d Proximity limit Switch	S9
Double Ex d Proximity Limit Switch	SS9
Double Ex d Proximity Limit Switch with SS316 Junction Box	SS9Jn
Pressure Gauge Assembly ⁽³⁾	6
S.S Glycerin Pressure Gauge Assembly ⁽³⁾	6n
Monel Pressure Gauge Assembly ⁽³⁾	6m
Ex Proof NEC Class 1 Div 1 Solenoid	7
Ex. d Atex Solenoid	9
Stainless steel 316 Solenoid Valve	K
Drain Valve	DV
Water Motor Alarm Assembly ⁽³⁾	W
Special Elastomer	E
Large Control Filter	F
Valve Position Indicator	I
S.S 316 Trim Accessories	N
S.S Solenoid Valve	K
Pressure Transmitter ⁽³⁾	Q
Drain and Indicating Components	A

*More options available – consult BERMAD

Notes:

- (1) Other materials available see engineering data
- (2) Coated internally and externally
- (3) Supplied loose
- (4) Consult BERMAD for availability
- (5) For valves up to and including 10"
- (6) Available in Ductile Iron only