ELECTRO-PNEUMATIC, PRESSURE CONTROL ON-OFF

Latching Deluge Valve

Model FP-400Y-6DC

The BERMAD Model 400Y-6DC is an elastomeric, hydraulic line pressure operated deluge valve, designed specifically for advanced fire protection systems and the latest industry standards.
The 400Y 6DC is activated by a fall in pneumatic pressure to the relay valve. A fall in pneumatic pressure can be from a dry pilot line, a remote pneumatic release, or from an electric signal to the 3-Way solenoid.
When open an integrated pressure control pilot valve regulates the main valve to maintain a precise, stable pre-set downstream pressure.
This valve is available with a latching option that maintains the deluge valve open until de-latched remotely.
The 400Y-6DC is ideal for open-nozzle systems with a high pressure water supply. It is available with electrical components to suit any hazardous location.

Features & Benefits

- Safety and reliability
  - Time proven, simple design with a fail safe actuation
  - Single piece rugged elastomer, VRSD technology
  - Obstacle-free, uninterrupted flow path
  - No mechanical moving parts
  - Shuts off on remote command
  - Ensures precise, stable downstream water pressure
  - Valve position limit switches (optional)
- High performance
  - Very high flow efficiency
  - Efficient Straight through flow
  - Approved for PN25 / 365 psi
- Specifically-designed for fire protection
  - Face-to-face length standardized to ISO 5752 EN 558-1
  - Meets the requirements of the industry standards
- Quick and easy maintenance
  - In-line serviceable
  - Fast and easy cover removal
  - Swivel mounted drain valves (for valves 3" and larger)

Approvals

c UL us LISTED	UL-Listed Special System Water Control Valves, Deluge Type (VLFT) Sizes 1½" - 16"
FM APPROVED	FM Approved for Deluge Sprinkler Systems Sizes 1½" - 8"
DNV	Det Norske Veritas Type Approval Sizes 1½" to 16"
ABS TYPE APPROVED PRODUCT	American Bureau of Shipping Type Approval Sizes 1½" - 12" Fire Test
Lloyd's Register TA TYPE APPROVED	Lloyd's Register Type Approval Sizes 1½" - 10"

Typical Applications

- Remote Control Water Spray Systems
- Foam applications
- Corrosive water systems
- High Pressure Water Supply
- Dual redundant detection systems

Optional Features

- Valve position limit switches
- Alarm pressure switch
- Air Maintentenance Device
- Drain valve/s inlet/outlet
- Corrosion resistant zinc based high build epoxy coating

All images in this catalog are for illustration only

Operation

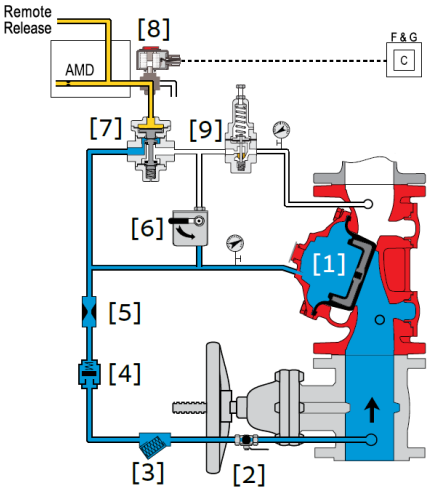

Valve Closed (normal conditions)

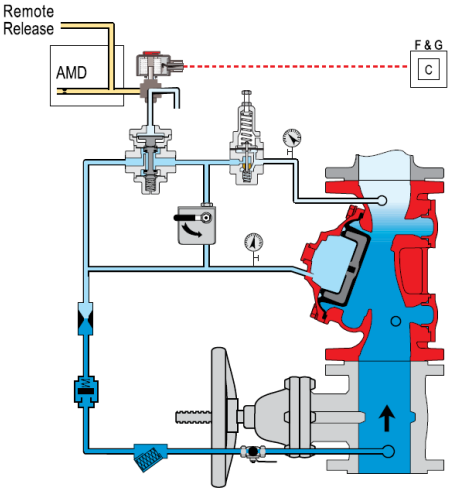

Valve Open (fire conditions)

The BERMAD model 400Y-6DC is held closed by water pressure in the control chamber [1]. Upon release of pressure from the control chamber, the valve opens.

Under NORMAL conditions, water pressure is supplied to the control chamber via the priming line [2] and strainer [3], restriction orifice [5] and trapped in the control chamber by a check valve [4], manual emergency release [6], and a relay valve (URV) [7] held closed by pneumatic pressure supplied via a Normally De-Energized, three-way solenoid valve [8]. The water pressure trapped in the main valve control chamber holds the diaphragm against the valve seat, sealing it drip-tight and keeping the system pipes dry.

Under FIRE conditions, water pressure is released from the control chamber, either with the manual emergency release, or by the URV opening. The URV opens in response either to a decrease in pneumatic pilot-line pressure [E] or to the solenoid valve being energized by the control system [C]. This opens the 400Y-6DC deluge valve, allowing water to flow into the system piping. The pressure-control pilot valve [9] modulates the main valve to maintain the set outlet pressure. When a Magna latch solenoid is specified, with H2 or H3 suffix, the deluge valve will latch open until reset remotely.

System P&ID

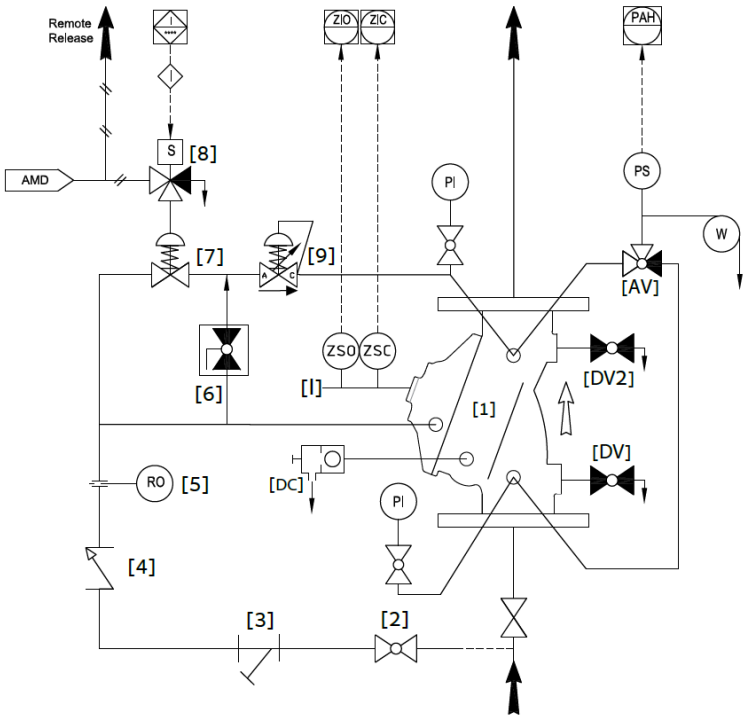

	Components
1	BERMAD 400Y Deluge Valve
2	Priming Ball Valve
3	Priming Strainer
4	Check Valve
5	Restriction Orifice
6	Manual Emergency Release
7	URV, Pilot Valve
8	3-Way NC Solenoid Valve
9	Pressure Control Pilot Valve

	Optional System Items
PS	Pressure Switch
W	Water Motor Alarm
ZS	Limit Switch Assembly
AMD-74/75	Air Maintenance Device
I	Visual Valve Position indicator
DV	Drain Valve*
PI	Pressure Gauge*
AV	3-way Alarm Test Valve*
DC	Automatic Drip Check Valve*

** Included with suffix A in the valve code, and mandatory for FM approval (drain and indicating components) See code designations on page 4 "Factory Supplied Additional Items"*

System Installation

A typical installation of the BERMAD model 400Y-6DC features actuation by way of a fall in pneumatic pressure to the control chamber of the 2-Way Universal Relay Valve.
It can also be actuated electrically by a signal from a fire & gas control system or an on-site emergency pushbutton. A pressure control pilot valve integrated in the control trim ensures a precise and stable pre-set downstream water pressure. When open, and fitted with a limit switch the valve can send a feedback signal to a remote valve position monitoring system.

Optional System Items

S.S. Glycerin Filled Pressure Gauge

Stainless steel Pressure Switch E xd

Basket Strainer - 60F

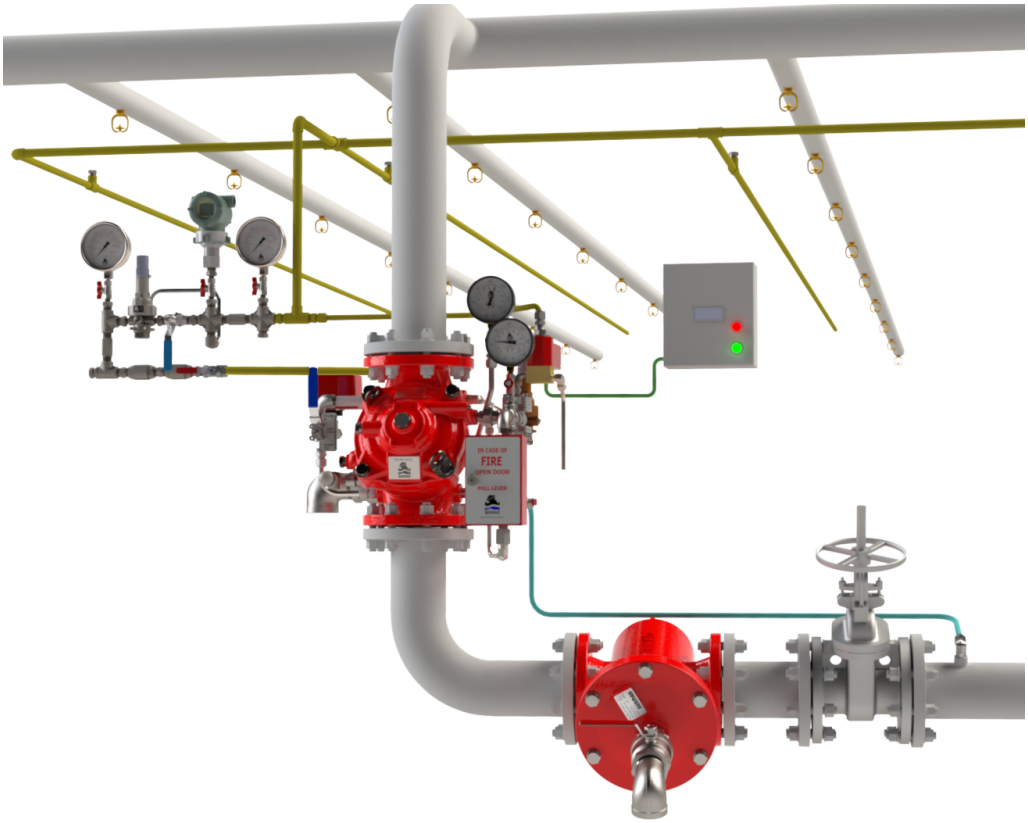

Suggested Specifications

The deluge valve shall be UL-listed and FM Approved for 365-psi/25bar.
The valve shall have with a straight-through Y-type-body with an unobstructed flow path and no stem guide or supporting ribs.
The deluge valve shall have no mechanical moving parts, and the actuation shall utilize a single-piece diaphragm assembly of VRSD technology.
The valve shall be coated internally and externally with UV protection. Optional: C5-VH grade of ISO-12944 standard against corrosive conditions.
The solenoid valve shall be a 3-way FM and UL429A-listed for 365 psi/25 bar with 65% of the rated voltage.
The control trim shall include a pressure control pilot valve, an auxiliary relay valve, a manual emergency release unit, a Y-type strainer, two 4-inch pressure gauges, an automatic drip-check with manual override, and a ball drain valve with a 360-degree swivel.
A valve position indicator shall be provided, and equipped with two proximity limit switches.
Removing the valve cover for full inspection and maintenance shall be in-line and not require removal of the control trim.
The deluge valve and control trim shall be pre-assembled and hydraulically tested by a UL/FM and ISO 9000, 9001 certified factory.

All images in this catalog are for illustration only

Technical Data

Available Sizes:
Flanged- 1½, 2, 3, 4, 6, 8, 10, 12, 14 & 16"
Grooved- 1½, 2, 3, 4, 6, 8 & 10"

Pressure Rating:
ANSI#150 - 17.2 bar | 250 psi
ANSI#300 - 1½" to 10" - 25 bar | 365 psi
ANSI#300 - 12" to 16" - 20 bar | 300 psi
Grooved - 17.2 / 25 bar | 250 / 365 psi
Setting range: FM: 30 to 235 psi / 2 to 16 bar | UL: 4 to 12 bar / 60 to 175 psi

Elastomer:
HTNR - Fabric Reinforced High Temperature Compound - See engineering data

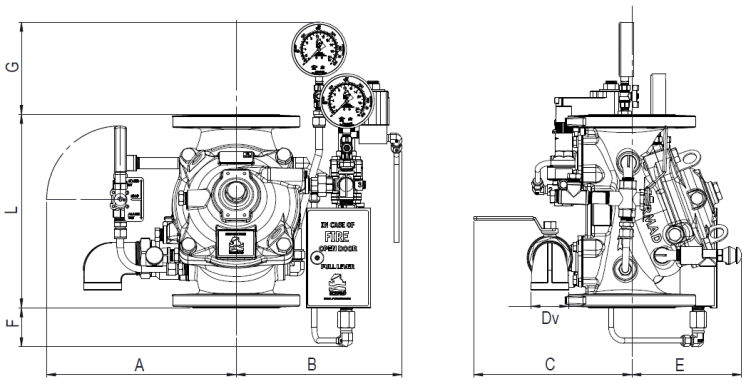

Valve Size	L #150 mm | in	L Grooved mm | in	L #300 mm | in	A mm | in	B mm | in	C mm | in	ØD in	E mm | in	F mm | in	G mm | in	Weight #150 kg | lb	Weight #300 kg | lb
DN40 | 1½"	230 | 9.1	230 | 9.1	230 | 9.1	293 | 11.5	232 | 9.1	177 | 7	¾"	215 | 8.5	166 | 6.5	130 | 5.1	19 | 40	20 | 45
DN50 | 2"	230 | 9.1	230 | 9.1	238 | 9.4	293 | 11.5	232 | 9.1	177 | 7	¾"	215 | 8.5	166 | 6.5	130 | 5.1	19 | 42	20 | 44
DN65 | 2½"	235 | 9.3	235 | 9.3	241 | 9.5	293 | 11.6	232 | 7.2	177 | 7.2	1½"	215 | 8.5	164 | 6.5	123 | 4.8	24 | 53	26 | 57
DN80 | 3"	310 | 12.2	310 | 12.2	326 | 12.8	313 | 12.3	292 | 11.5	177 | 7	1½"	186 | 7.3	97 | 3.8	100 | 3.9	38 | 84	39 | 8.6
DN100 | 4"	350 | 13.8	350 | 13.8	368 | 14.5	343 | 13.5	300 | 9.8	287 | 11.3	2"	199 | 7.8	71 | 2.8	167 | 6.6	52 | 114	59 | 130
DN150 | 6"	480 | 18.9	480 | 18.9	506 | 19.9	358 | 14	354 | 13.9	302 | 11.9	2"	234 | 9.2	-	35 | 1.4	100 | 220	120 | 264
DN200 | 8"	600 | 23.6	600 | 23.6	626 | 24.7	392 | 15.4	431 | 17	317 | 12.5	2"	301 | 11.8	-	-	169 | 372	189 | 416
DN250 | 10"	730 | 28.7	730 | 28.7	730 | 28.7	406 | 16	431 | 17	317 | 12.5	2"	301 | 11.8	-	-	202 | 444	238 | 524
DN300 | 12"	850 | 33.5	-	888 | 35	478 | 18.8	496 | 19.5	380 | 15	2"	441 | 17.4	-	-	358 | 788	398 | 876
DN350 | 14"	980 | 38.6	-	980 | 38.6	478 | 18.8	496 | 19.5	379 | 14.9	2"	441 | 17.4	-	-	394 | 867	454 | 999
DN400 | 16"	1100 | 43.3	-	1100 | 43.3	478 | 18.8	496 | 19.5	405 | 16.1	2"	417 | 15.9	-	-	445 | 980	564 | 1241

IMPORTANT: Dimensions for the trim envelope or extents refer to a vertical orientation and may vary with specific component positioning -Apart from the "L" dimension, allow a tolerance of at least ±15%

Valve Code Designations

FP | 6" | 400Y-6DC | 03 | V | C | A5 | ER | 4DC | NN | N6nW

Category	Code
Standard	FP
Seawater	FS
Foam	FC

Valve Size	
1½"	40 mm
2"	50 mm
2½"	60 mm (6)
3"	80 mm
4"	100 mm
6"	150 mm
8"	200 mm
10"	250 mm
12"	300 mm
14"	350 mm
16"	400 mm

Installation	Code
Vertical	V
Horizontal	H

Material Body & Cover (1)	Code
Ductile Iron A536 (2)	C
Steel ASTM A216 WCB (2)	S
Stainless Steel 316	N
Nickel Al Bronze C95800	U
Super Duplex Grade 5A	D

End Connections	Code
ANSI#150RF	A5
ANSI#150FF	a5
ANSI#300RF	A3
ANSI#300FF	a3
ISO PN16	16
ISO PN25	25
Grooved Class 250psi/17.2bar(5)	VI
Grooved Class 365psi/25bar(5)	V2

Coating	Code
High Build Epoxy	ER
Zinc Based High Build Epoxy (5)	ZR
Uncoated	UC

Voltage - Main Valve N.O or N.C *	Code
24VDC - N.C.	4DC
24VDC - N.O.	4DO
110VDC - N.C.	5DC
110VDC - N.O.	5DO
110 - 120/AC - N.C.	5AC
110 - 120/AC - N.C.	5AO
220 - 240/AC - N.C.	2AC
221 - 240/AC - N.C.	2AO

* N.O. or N.C. refers to the main valve status when the Solenoid is de-energized

Additional Feature	Code
Closing Speed Control	01
Opening Speed Control	02
Opening & Closing Speed Control	03
None	-

Tubing & Fittings	Code
Stainless Steel 316	NN
Monel 400	MM
Super Duplex	DD

Factory Supplied Additional Items	Code
General Purpose NEMA-4 Pressure Switch	P
Ex Proof NEC, Div.1 Pressure Switch (3)	P7
Ex d ATEX Pressure Switch (3)	P9
Ex d Pressure Switch, SS316 Enclosure (3)	P9Jn
Ex d Pressure Switch, SS316 Enclosure, Monel Sensor (3)	P9mJn
Single Limit Switch, General Purpose	S
Single Ex d Proximity limit Switch	S9
Double Ex d Proximity Limit Switch	SS9
Double Ex d Proximity Limit Switch with SS316 Junction Box	SS9Jn
Pressure Gauge Assembly (3)	6
S.S Glycerin Pressure Gauge Assembly (3)	6n
Monel Pressure Gauge Assembly (3)	6m
Ex Proof NEC Class 1 Div 1 Solenoid	7
Ex. d Atex Solenoid	9
Stainless steel 316 Solenoid Valve	K
Magna-Latch Solenoid 2 wires	H2
Magna-Latch Solenoid 3 wires	H3
Drain Valve	DV
Water Motor Alarm Assembly (3)	W
Large Control Filter	F
Valve Position Indicator	I
S.S 316 Trim Accessories	N
S.S Solenoid Valve	K
Pressure Transmitter (3)	Q
Drain and Indicating Components	A

*More options available – consult BERMAD

Notes:
(1) Other materials available see engineering data
(2) Coated internally and externally
(3) Supplied loose
(4) Consult BERMAD for availability
(5) For valves up to and including 10"
(6) Available in Ductile Iron only

***UL-Listed** with BE370D 3-way 24 VDC, 110AC/DC, 220 AC/DC 8 Watts or BE370D-U Magna-Latch 24 VDC, 3 Watts 2-wires (code H2)
...ith BE370D-U Magna-Latch 3-Way 24 VDC, 3 Watts 2-wires (code H2) type 17, 87 or 8W 3-wires (code H3)

www.bermad.com

The information contained herein may be changed by BERMAD without notice. BERMAD shall not be held liable for any errors.
© Copyright 2016-2026 BERMAD CS Ltd

October 2026